

NPN HIGH POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/408

Devices

2N3715

2N3716

Qualified Level

JAN
JANTX
JANTXV


MAXIMUM RATINGS

Ratings	Symbol	2N3715	2N3716	Units
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CBO}	80	100	Vdc
Emitter-Base Voltage	V_{EBO}	7.0		Vdc
Base Current	I_B	4.0		Adc
Collector Current	I_C	10		Adc
Total Power Dissipation	P_T	@ $T_A = 25^{\circ}\text{C}$	5.0	W
		@ $T_C = 100^{\circ}\text{C}$	85.7	W
Operating & Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		$^{\circ}\text{C}$

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.17	$^{\circ}\text{C}/\text{W}$

- 1) Derate linearly 28.57 mW/ $^{\circ}\text{C}$ for $T_A > 25^{\circ}\text{C}$
- 2) Derate linearly 0.857 W/ $^{\circ}\text{C}$ for $T_C > 100^{\circ}\text{C}$

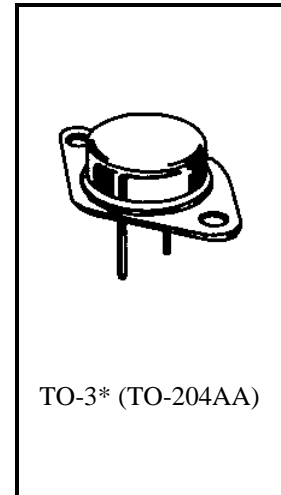

*See Appendix A for Package Outline

ELECTRICAL CHARACTERISTICS ($T_C = 25^{\circ}\text{C}$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Current $I_C = 10 \text{ mAdc}$	2N3715 2N3716	$V_{(BR)CEO}$	60 80	Vdc
Collector-Base Cutoff Current $V_{CB} = 80 \text{ Vdc}$ $V_{CB} = 100 \text{ Vdc}$	2N3715 2N3716	I_{CBO}	10 10	μAdc
Emitter-Base Breakdown Voltage $V_{EB} = 7.0 \text{ Vdc}$		I_{EBO}	1.0	mAdc
Collector-Emitter Cutoff Current $V_{BE} = 1.5 \text{ Vdc}, V_{CE} = 60 \text{ Vdc}$ $V_{BE} = 1.5 \text{ Vdc}, V_{CE} = 80 \text{ Vdc}$	2N3715 2N3716	I_{CEX}	1.0 1.0	mAdc

2N3715, 2N3716 JAN SERIES

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
Collector-Emitter Cutoff Current V _{CE} = 60 Vdc V _{CE} = 80 Vdc	I _{CES}		1.0 1.0	mAdc

ON CHARACTERISTICS ⁽³⁾

Forward-Current Transfer Ratio I _C = 1.0 Adc, V _{CE} = 2.0 Vdc I _C = 3.0 Adc, V _{CE} = 2.0 Vdc I _C = 5.0 Adc, V _{CE} = 2.0 Vdc I _C = 10 Adc, V _{CE} = 4.0 Vdc	h _{FE}	50 30 10 5.0	150 120	
Collector-Emitter Saturation Voltage I _C = 5.0 Adc, I _B = 0.5 Adc I _C = 10 Adc, I _B = 2.0 Adc	V _{CE(sat)}		1.0 2.5	Vdc
Base-Emitter Saturation Voltage I _C = 5.0 Adc, I _B = 0.5 Adc I _C = 10 Adc, I _B = 2.0 Adc	V _{BE(sat)}		1.5 3.0	Vdc

DYNAMIC CHARACTERISTICS

Magnitude of Common Emitter Small-Signal Short Circuit Forward Current Transfer Ratio I _C = 0.5 Adc, V _{CE} = 10 Vdc, f = 100 kHz – 1.0 MHz	h _{fe}	4.0	20	
Forward Current Transfer Ratio I _C = 0.5 Adc, V _{CE} = 10 Vdc, f = 1.0 kHz	h _{fe}	30	300	
Output Capacitance V _{CB} = 10 Vdc, I _E = 0, f = 1.0 MHz	C _{obo}		500	pF

SAFE OPERATING AREA

DC Tests T _C = +25°C, 1 Cycle, t ≥ 1.0 s				
Test 1 V _{CE} = 15 Vdc, I _C = 10 Adc				
Test 2 V _{CE} = 40 Vdc, I _C = 3.75 Adc				
Test 3 V _{CE} = 55 Vdc, I _C = 0.9 Adc 2N3715 V _{CE} = 65 Vdc, I _C = 0.9 Adc 2N3716				

(3) Pulse Test: Pulse Width = 300µs, Duty Cycle ≤ 2.0%.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.