

NPN HIGH POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/456

Devices

2N5302


2N5303

Qualified Level

JANTX
JANTXV

MAXIMUM RATINGS

Ratings	Symbol	2N5302	2N5303	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CBO}	60	80	Vdc
Emitter-Base Voltage	V_{EBO}	5.0		Vdc
Collector Current	I_C	30	20	Adc
Base Current	I_B	7.5		Adc
Total Power Dissipation	P_T	@ $T_A = +25^{\circ}\text{C}^{(1)}$	5.0	W
		@ $T_C = +100^{\circ}\text{C}^{(2)}$	115	W/ $^{\circ}\text{C}$
Operating & Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		$^{\circ}\text{C}$

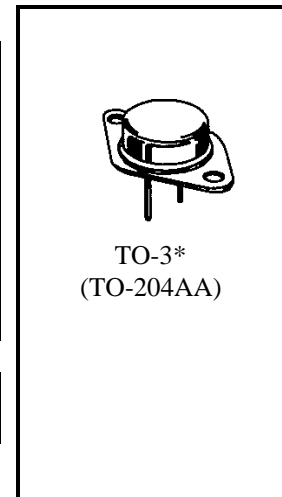

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.875	$^{\circ}\text{C}/\text{W}$

1) Derate linearly 28.57 mW/ $^{\circ}\text{C}$ for $T_A = +25^{\circ}\text{C}$

2) Derate linearly 1.14 W/ $^{\circ}\text{C}$ for $T_C = +100^{\circ}\text{C}$

*See appendix A for package outline

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Current $I_C = 200 \text{ mAdc}, I_B = 0$	2N5302 2N5303	$V_{(BR)CEO}$	60 80	Vdc
Collector-Emitter Cutoff Current $V_{CE} = 60 \text{ Vdc}, I_B = 0$ $V_{CE} = 80 \text{ Vdc}, I_B = 0$	2N5302 2N5303	I_{CEO}	10 10	μAdc
Emitter-Base Cutoff Current $V_{EB} = 5.0 \text{ Vdc}, I_C = 0$		I_{EBO}	5.0	μAdc
Collector-Emitter Cutoff Current $V_{BE} = 1.5 \text{ Vdc}, V_{CE} = 60 \text{ Vdc}$ $V_{BE} = 1.5 \text{ Vdc}, V_{CE} = 80 \text{ Vdc}$	2N5302 2N5303	I_{CEX}	5.0 5.0	μAdc
Collector-Emitter Cutoff Current $V_{CE} = 60 \text{ Vdc}$ $V_{CE} = 80 \text{ Vdc}$	2N5302 2N5303	I_{CBO}	5.0 5.0	μAdc

2N5302, 2N5303 JAN SERIES

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min.	Max.	Unit
DC CHARACTERISTICS				
Forward-Current Transfer Ratio I _C = 1.0 Adc, V _{CE} = 2.0 Vdc I _C = 15 Adc, V _{CE} = 2.0 Vdc I _C = 10 Adc, V _{CE} = 2.0 Vdc I _C = 30 Adc, V _{CE} = 4.0 Vdc I _C = 20 Adc, V _{CE} = 4.0 Vdc	h _{FE}	40 15 15 5.0 5.0	60 60	
Base-Emitter Saturation Voltage I _C = 10 Adc, I _B = 1.0 Adc I _C = 15 Adc, I _B = 1.5 Adc I _C = 15 Adc, I _B = 1.5 Adc I _C = 20 Adc, I _B = 2.0 Adc I _C = 20 Adc, I _B = 4.0 Adc	V _{BE(sat)}		1.7 1.8 2.0 2.5 2.5	Vdc
Base-Emitter Non-Saturation Voltage V _{CE} = 2.0 Vdc; I _C = 15 Adc V _{CE} = 2.0 Vdc; I _C = 10 Adc V _{CE} = 4.0 Vdc; I _C = 30 Adc V _{CE} = 4.0 Vdc; I _C = 20 Adc	V _{BE}		1.8 1.5 3.0 2.5	Vdc
Collector-Emitter Saturation Voltage I _C = 10 Adc, I _B = 1.0 Adc I _C = 10 Adc, I _B = 1.0 Adc I _C = 15 Adc, I _B = 1.5 Adc I _C = 15 Adc, I _B = 1.5 Adc I _C = 20 Adc, I _B = 2.0 Adc I _C = 20 Adc, I _B = 4.0 Adc I _C = 30Adc, I _B = 6.0 Adc	V _{CE(sat)}		0.75 1.0 1.0 1.5 2.0 2.0 3.0	Vdc

DYNAMIC CHARACTERISTICS

Magnitude of Small-Signal Short Circuit Forward Current Transfer Ratio I _C = 1.0 Adc, V _{CE} = 10 Vdc, f = 1.0 MHz	h _{fe}	2.0	40	
Output Capacitance V _{CB} = 10 Vdc, I _E = 0, 100 kHz ≤ f ≤ 1.0 MHz	C _{obo}		800	pF

SWITCHING CHARACTERISTICS

Delay Time	V _{CC} = 30 Vdc; I _C = 10 Adc; I _B = 1.0 Adc	t _d	0.2	μs
Rise Time		t _r	0.9	μs
Storage Time		t _s	2.0	μs
Fall Time		t _f	1.0	μs

SAFE OPERATING AREA

DC Tests: T_C = 25°C, 1 Cycle, t ≥ 1.0 s	
Test 1	
V _{CE} = 6.67 Vdc, I _C = 30 Adc	2N5302
V _{CE} = 10 Vdc, I _C = 20 Adc	2N5303
Test 2	
V _{CE} = 20 Vdc, I _C = 10 Adc	2N5302; 2N5303
Test 3	
V _{CE} = 40 Vdc, I _C = 3.0Adc	2N5302; 2N5303
Test 4	
V _{CE} = 50 Vdc, I _C = 600 mAdc	2N5302
V _{CE} = 60 Vdc, I _C = 600 mAdc	2N5303
Clamped Switching: T_A = 25°C, V_{CE} = 15 Vdc	
Clamp Voltage = 60 Vdc, I _C = 30 Adc	2N5302
Clamp Voltage = 80 Vdc, I _C = 20 Adc	2N5303



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.