


SIEMENS AKTIENGESELLSCHAFT

Main ratings


Drain-source voltage $V_{DS} = 1000\text{ V}$
 Continuous drain current $I_D = 4,2\text{ A}$
 Drain-source on-resistance $R_{DS(on)} = 2,0\ \Omega$

N-Channel



Description SIPMOS, N-channel, enhancement mode
Case Plastic package TO 238 AA with insulated metal base plate in accordance with JEDEC, compatible with TO 3; AMP plug-in connections. Approx. weight 21 g

Type	Ordering code
BUZ 58	C67078-A1607-A2

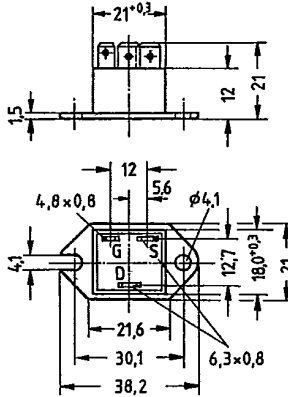

Maximum ratings

Dimensions in mm

Description	Symbols	Ratings	Units	Conditions
Drain-source voltage	V_{DS}	1000	V	
Drain-gate voltage	V_{DGR}	1000	V	$R_{GS} = 20\text{ k}\Omega$
Continuous drain current	I_D	4,2	A	$T_C = 25\text{ }^\circ\text{C}$
Pulsed drain current	I_{Dpuls}	17	A	$T_C = 25\text{ }^\circ\text{C}$
Gate-source voltage	V_{GS}	± 20	V	
Max. power dissipation	P_D	83,3	W	$T_C = 25\text{ }^\circ\text{C}$
Operating and storage temperature range	T_J T_{stg}	$-40 \dots +150$	$^\circ\text{C}$	
Isolation test voltage	V_{is}	3500	Vdc ¹⁾	$t = 1\text{ min}$
DIN humidity category		F	-	DIN 40040
IEC climatic category		40/150/56	-	DIN IEC 68-1

Thermal resistance

Chip - case | $R_{th,jc}$ | $\leq 1,5$ | K/W |

¹⁾ Isolation test voltage between drain and base plate referred to standard climate 23/50 in accordance with DIN 50014.

388 Preferred Type 0970

F-13

Electrical characteristics(at $T_j = 25^\circ\text{C}$ unless otherwise specified)

Description	Symbol	Characteristics			Unit	Conditions
		min.	typ.	max.		

Static ratings

Drain-source breakdown voltage	$V_{(BR)DSS}$	1000	—	—	V	$V_{GS} = 0V$ $I_D = 0,25mA$
Gate threshold voltage	$V_{GS(th)}$	2,1	3,0	4,0		$V_{DS} = V_{GS}$ $I_D = 1mA$
Zero gate voltage drain current	I_{DSS}	—	20 100	250 1000	μA	$T_j = 25^\circ C$ $T_j = 125^\circ C$ $V_{DS} = 1000V$ $V_{GS} = 0V$
Gate-source leakage current	I_{GSS}	—	10	100	nA	$V_{GS} = 20V$ $V_{DS} = 0V$
Drain-source on-resistance	$R_{DS(on)}$	—	1,7	2,0	Ω	$V_{GS} = 10V$ $I_D = 2,6A$

Dynamic ratings


Forward transconductance	g_{fs}	1,4	3,5	—	S	$V_{DS} = 25V$ $I_D = 2,6A$
Input capacitance	C_{iss}	—	3,9	5,0	nF	$V_{GS} = 0V$
Output capacitance	C_{oss}	—	180	300	pF	$V_{DS} = 25V$ $f = 1MHz$
Reverse transfer capacitance	C_{rss}	—	70	120		
Turn-on time t_{on} ($t_{on} = t_{d(on)} + t_r$)	$t_{d(on)}$ t_r	—	60 90	90 140	ns	$V_{CC} = 30V$ $I_D = 2,5A$ $V_{GS} = 10V$ $R_{GS} = 50\Omega$
Turn-off time t_{off} ($t_{off} = t_{d(off)} + t_f$)	$t_{d(off)}$ t_f	—	330 110	430 140		

Reverse diode


Continuous reverse drain current	I_{DR}	—	—	4,2	A	$T_C = 25^\circ C$
Pulsed reverse drain current	I_{DRM}	—	—	17		
Diode forward on-voltage	V_{SD}	—	1,1	1,4	V	$I_F = 2 \times I_{DR}$ $V_{GS} = 0V, T_j = 25^\circ C$
Reverse recovery time	t_{rr}	—	2000	—	ns	$T_j = 25^\circ C$
Reverse recovery charge	Q_{rr}	—	30	—	μC	$I_F = I_{DR}$ $d_{F/dt} = 100A/\mu s$ $V_R = 100V$

SIEMENS AKTIENGESELLSCHAFT


Power dissipation $P_D = f(T_C)$

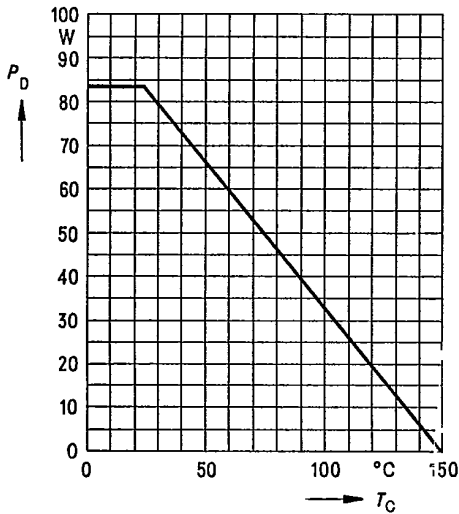


Typical output characteristics $I_D = f(V_{DS})$
parameter: 80 μ s pulse test,
 $T_J = 25^\circ\text{C}$

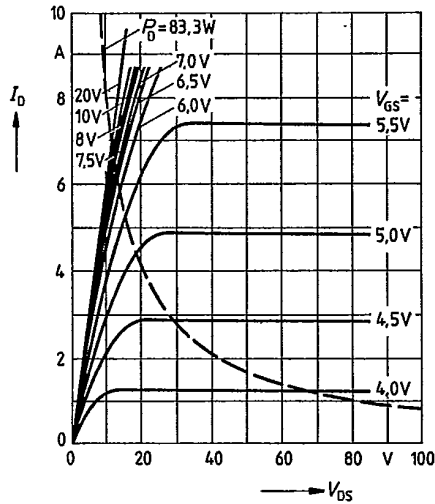

Safe operating area $I_D = f(V_{DS})$
parameter: $D = 0.01$, $T_C = 25^\circ\text{C}$

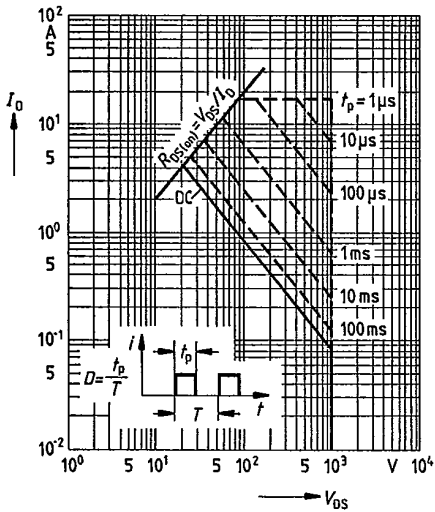


Typical transfer characteristic $I_D = f(V_{GS})$
parameter: 80 μ s pulse test,
 $V_{DS} = 25\text{V}$, $T_J = 25^\circ\text{C}$

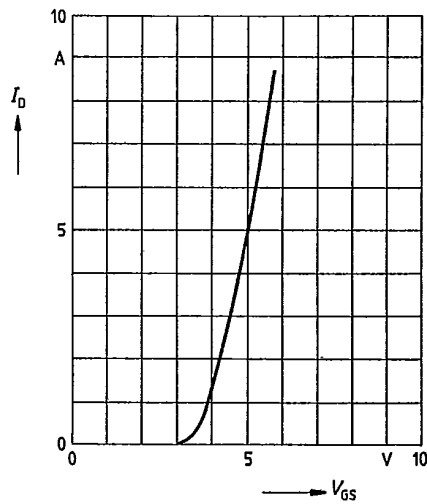


Typical drain-source on-state resistance

$R_{DS(on)} = f(I_D)$
parameter: $V_{GS} = 5V$; $T_j = 25^\circ C$

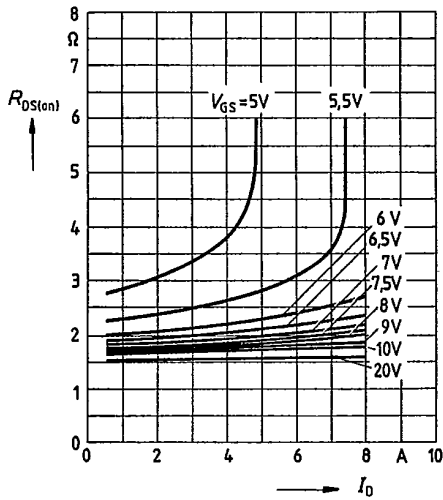


Drain-source on-state resistance

$R_{DS(on)} = f(T_j)$
parameter: $I_D = 2.6A$, $V_{GS} = 10V$
(spread)

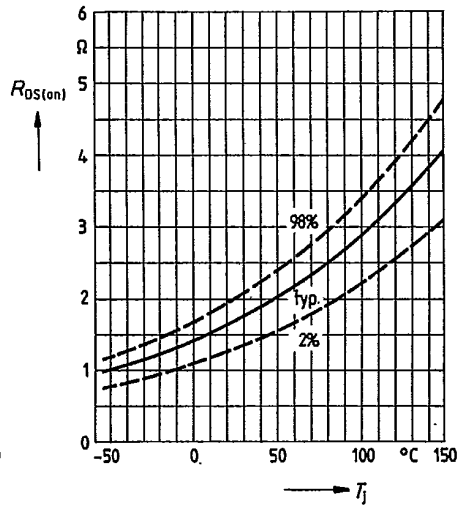


Typical transconductance $g_{fs} = f(I_D)$

parameter: 80 μs pulse test,
 $V_{DS} = 25V$, $T_j = 25^\circ C$

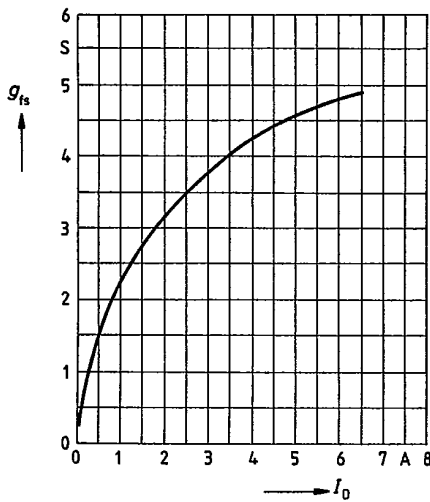


Gate threshold voltage $V_{GS(th)} = f(T_j)$

parameter: $V_{DS} = V_{GS}$, $I_D = 1mA$
(spread)

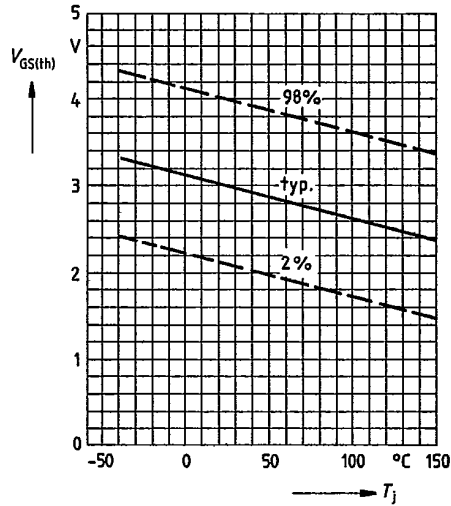


SIEMENS AKTIENGESELLSCHAFT

Typical capacitances $C = f(V_{DS})$
parameter: $V_{GS} = 0, f = 1\text{MHz}$

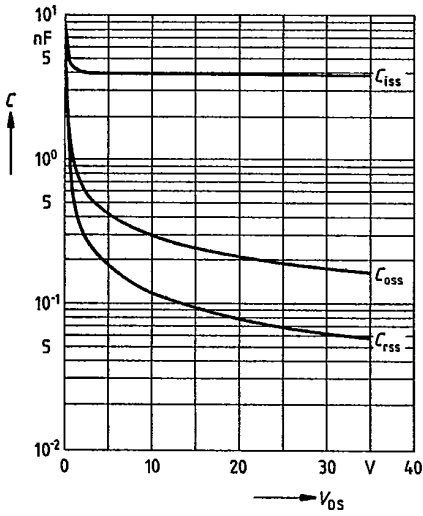


Continuous drain current $I_D = f(T_C)$
parameter: $V_{GS} \geq 10\text{V}$

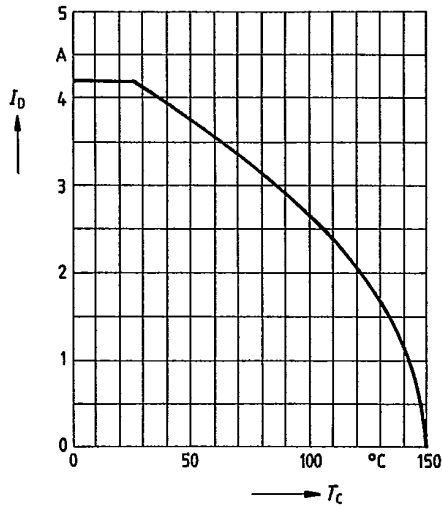

Forward characteristic of reverse diode

$I_F = f(V_{SD})$
parameter: $T_j, t_p = 80 \mu\text{s}$
(spread)

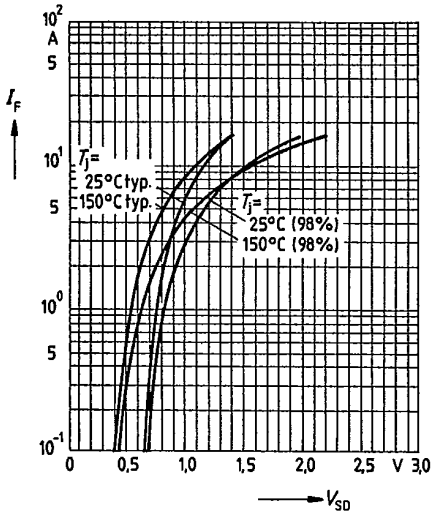


392

0974


G-03

SIEMENS AKTIENGESELLSCHAFT

Transient thermal impedance $Z_{thJC} = f(t)$
 parameter: $D = t_p/T$

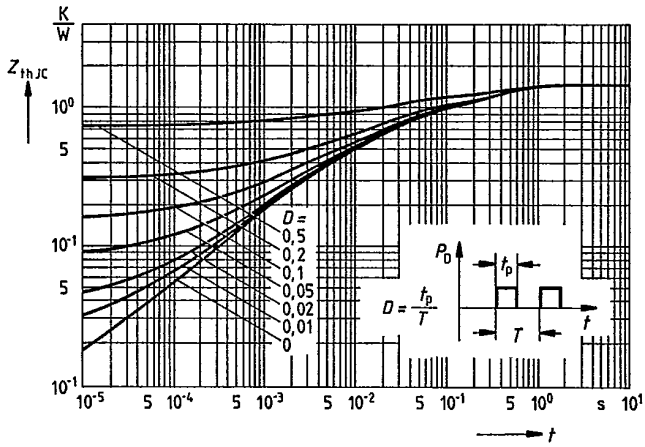

Typical gate-charge $V_{GS} = f(Q_{Gate})$
 parameter: $I_{D\ puls} = 8.0A$

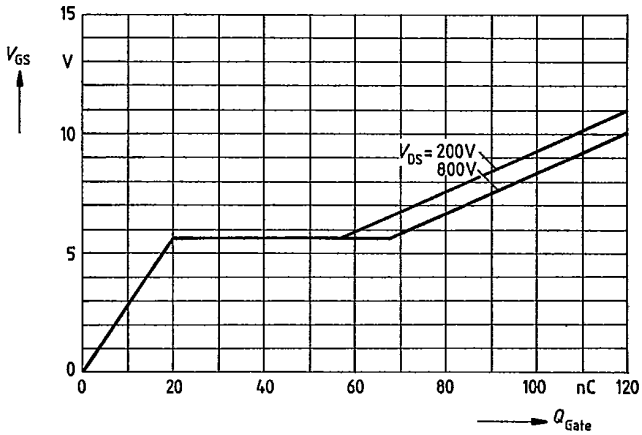



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.