

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:

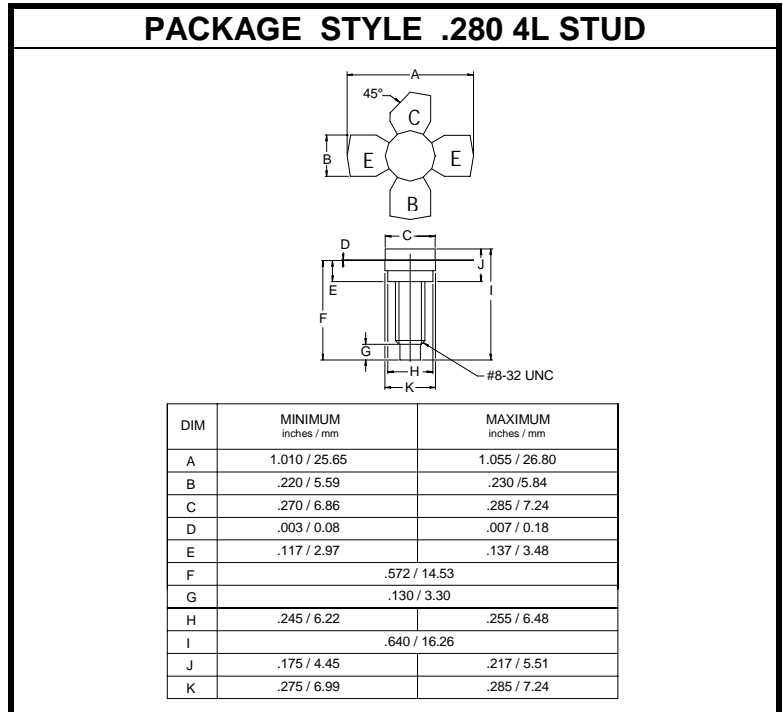
The **ASI BLX92A** is Designed for transmitting applications in class-A, B or C with a supply voltage up to 28 V

FEATURES:

- High Gain - 11.0 dB Min.
- **Omnigold™** Metallization System

MAXIMUM RATINGS

I_C	0.7 A
V_{CB}	65 V
P_{DISS}	6.0 W @ T _C = 25 °C
T_J	-65 to +200 °C
T_{STG}	-65 to +150 °C
θ_{JC}	9.8 °C/W


CHARACTERISTICS T_C = 25 °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CBO}	I _C = 10 mA	65			V
BV_{CES}	I _C = 10 mA	65			V
BV_{CEO}	I _C = 25 mA	33			V
BV_{EBO}	I _E = 1.0 mA	4.0			V
h_{FE}	V _{CE} = 5.0 V I _C = 100 mA	10			---
f_T	V _{CE} = 5.0 V I _C = 100 mA		1.2		GHz
C_c	V _{CB} = 10 V f = 1.0 MHz		6.5		pF
C_e	V _{EB} = 0 V f = 1.0 MHz		25		pF
P_G η_C	V _{CE} = 28 V P _{OUT} = 2.5 W f = 470 MHz	11 60			dB %

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.