

NPN SILICON HIGH POWER TRANSISTOR

Qualified per MIL-PRF-19500/262

Devices

2N1722

2N1724

Qualified Level


JAN
JANTX

MAXIMUM RATINGS

Ratings		Symbol	Value	Units
Collector-Emitter Voltage		V_{CEO}	80	Vdc
Collector-Base Voltage		V_{CBO}	175	Vdc
Emitter-Base Voltage		V_{EBO}	10	Vdc
Collector Current		I_C	5.0	Adc
Total Power Dissipation	@ $T_A = +25^{\circ}\text{C}^{(1)}$	P_T	3.0	W
	@ $T_C = +100^{\circ}\text{C}^{(2)}$		50	W
Temperature Range:	Operating	T_{OP}	175	$^{\circ}\text{C}$
	Storage Junction	T_{stg}	-65 to +200	

1) Derate linearly 20 mW/ $^{\circ}\text{C}$ for T_A between $+25^{\circ}\text{C}$ and $+175^{\circ}\text{C}$

2) Derate linearly 666 mW/ $^{\circ}\text{C}$ for T_C between $+100^{\circ}\text{C}$ and $+175^{\circ}\text{C}$

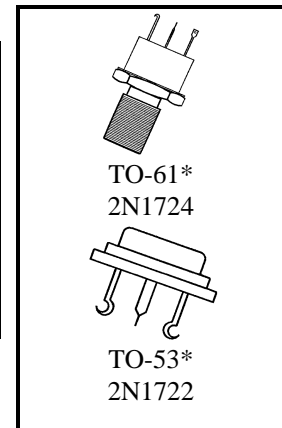

*See Appendix A for
Package Outline

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage $I_C = 200 \text{ mAdc}$	$V_{(BR)CEO}$	80		Vdc
Emitter-Base Breakdown Voltage $I_E = 10 \text{ mAdc}$	$V_{(BR)EBO}$	10		Vdc
Collector-Emitter Cutoff Current $V_{CE} = 60 \text{ Vdc}$	I_{CES}		300	μAdc
Collector-Base Cutoff Current $V_{CB} = 175 \text{ Vdc}$	I_{CBO}		5.0	mAdc
Emitter-Base Cutoff Current $V_{EB} = 7.0 \text{ Vdc}$	I_{EBO}		400	μAdc

2N1722, 2N1724 JAN SERIES

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

ON CHARACTERISTICS

Forward-Current Transfer Ratio $I_C = 2.0 \text{ Adc}, V_{CE} = 15 \text{ Vdc}$ $I_C = 5.0 \text{ Adc}, V_{CE} = 15 \text{ Vdc}$ $I_C = 100 \text{ mAdc}, V_{CE} = 15 \text{ Vdc}$	h_{FE}	30 15 30	120	
Collector-Emitter Saturation Voltage $I_C = 2.0 \text{ Adc}, I_B = 200 \text{ mAdc}$	$V_{CE(sat)}$		0.6	Vdc
Base-Emitter Saturation Voltage $I_C = 2.0 \text{ Adc}, I_B = 200 \text{ mVdc}$	$V_{BE(sat)}$		1.2	Vdc

DYNAMIC CHARACTERISTICS

Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 500 \text{ mAdc}, V_{CE} = 15 \text{ Vdc}; f = 10 \text{ MHz}$	$ h_{fe} $	1.0	5.0	
Output Capacitance $V_{CB} = 15 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	C_{obo}		550	pF



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.