

CLL4614
THRU
CLL4627

500mW LOW NOISE ZENER DIODE
5% TOLERANCE



SOD-80 CASE

CentralTM
Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CLL4614 Series Silicon Zener Diode is a high quality voltage regulator designed for low leakage, low current and low noise applications.

Marking Code: Cathode Band

ABSOLUTE MAXIMUM RATINGS

Power Dissipation (@ $T_A=25^{\circ}\text{C}$)
Operating and Storage Temperature

SYMBOL

P_D 500
 T_J, T_{stg} -65 to +200

UNITS

mW
 $^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS:

($T_A=25^{\circ}\text{C}$) $V_F=1.0\text{V MAX @ } I_F=200\text{mA}$ FOR ALL TYPES


TYPE NO.	ZENER VOLTAGE	TEST CURRENT	MAXIMUM ZENER IMPEDANCE	MAXIMUM REVERSE LEAKAGE CURRENT		MAXIMUM ZENER CURRENT	MAXIMUM NOISE DENSITY
	$V_Z@I_{ZT}$	I_{ZT}	$Z_{ZT}@I_{ZT}$	$I_R@V_R$		I_{ZM}	$N_D@I_{ZT}=250\mu\text{A}$
	VOLTS	μA	Ω	μA	VOLTS	mA	$\mu\text{V}/\sqrt{\text{Hz}}$
CLL4614*	1.8	250	1200	7.5	1.0	120	1.0
CLL4615*	2.0	250	1250	5.0	1.0	110	1.0
CLL4616*	2.2	250	1300	4.0	1.0	100	1.0
CLL4617*	2.4	250	1400	2.0	1.0	95	1.0
CLL4618*	2.7	250	1500	1.0	1.0	90	1.0
CLL4619*	3.0	250	1600	0.8	1.0	85	1.0
CLL4620*	3.3	250	1650	7.5	1.5	80	1.0
CLL4621*	3.6	250	1700	7.5	2.0	75	1.0
CLL4622*	3.9	250	1650	5.0	2.0	70	1.0
CLL4623*	4.3	250	1600	4.0	2.0	65	1.0
CLL4624*	4.7	250	1550	10	3.0	60	1.0
CLL4625*	5.1	250	1500	10	3.0	55	2.0
CLL4626*	5.6	250	1400	10	4.0	50	4.0
CLL4627*	6.2	250	1200	10	5.0	45	5.0

*Available on special order; consult factory.

R3 (21-August 2001)

500mW LOW NOISE ZENER DIODE
5% TOLERANCE

SOD-80 CASE - MECHANICAL OUTLINE

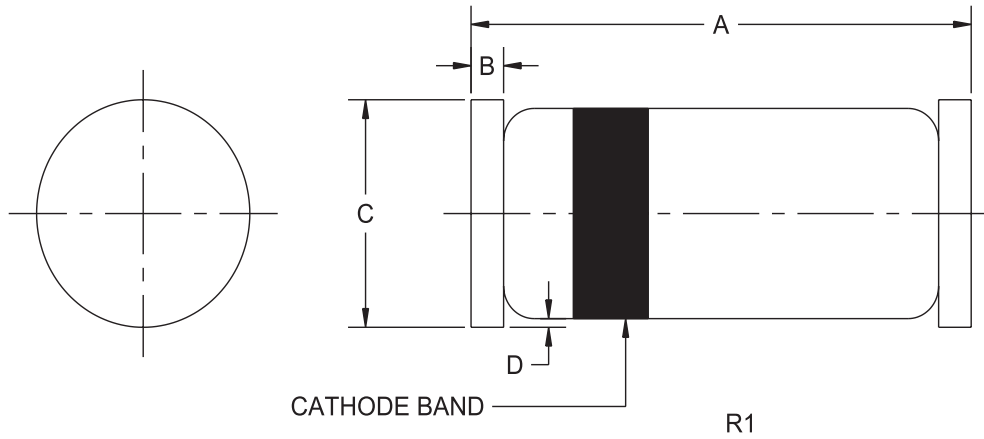

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.130	0.146	3.30	3.71
B	0.016		0.41	
C (DIA)	0.051	0.067	1.30	1.70
D	-	0.004	-	0.10

SOD-80 (REV:R1)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.