

CLL5221B THRU CLL5267B

**SURFACE MOUNT
SILICON ZENER DIODE
2.4 VOLTS THRU 75 VOLTS
500mW, 5% TOLERANCE**



SOD-80 CASE

Central™

Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CLL5221B Series Silicon Zener Diode is a high quality voltage regulator designed for use in industrial, commercial, entertainment, and computer applications.

MARKING CODE: CATHODE BAND

MAXIMUM RATINGS:

Power Dissipation (@ $T_A=50^\circ\text{C}$)

Operating and Storage Temperature

Tolerance "B"

Tolerance "C"

Tolerance "D"

SYMBOL

P_D

T_J, T_{stg}

500

-65 to +200

± 5

± 2

± 1

UNIT

mW

$^\circ\text{C}$

%

%

%

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$), $V_F=1.25\text{V MAX @ } I_F=200\text{mA}$ FOR ALL TYPES.

TYPE NO.	ZENER VOLTAGE $V_Z @ I_{ZT}$			TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAXIMUM ZENER VOLTAGE TEMPERATURE COEFFICIENT θ_{VZ}
	MIN	NOM	MAX		$Z_{ZT} @ I_{ZT}$		$Z_{ZK} @ I_{ZK}$	$I_R @ V_R$		
	VOLTS	VOLTS	VOLTS		Ω	Ω		μA	VOLTS	
CLL5221B*	2.280	2.4	2.520	20	30	1200	0.25	100	1.0	-0.085
CLL5222B*	2.375	2.5	2.625	20	30	1250	0.25	100	1.0	-0.085
CLL5223B*	2.565	2.7	2.835	20	30	1300	0.25	75	1.0	-0.080
CLL5224B*	2.660	2.8	2.940	20	30	1400	0.25	75	1.0	-0.080
CLL5225B	2.850	3.0	3.150	20	29	1600	0.25	50	1.0	-0.075
CLL5226B	3.135	3.3	3.465	20	28	1600	0.25	25	1.0	-0.070
CLL5227B	3.420	3.6	3.780	20	24	1700	0.25	15	1.0	-0.065
CLL5228B	3.705	3.9	4.095	20	23	1900	0.25	10	1.0	-0.060
CLL5229B	4.085	4.3	4.515	20	22	2000	0.25	5.0	1.0	± 0.055
CLL5230B	1.465	4.7	4.935	20	19	1900	0.25	5.0	2.0	± 0.030
CLL5231B	4.845	5.1	5.355	20	17	1600	0.25	5.0	2.0	± 0.030
CLL5232B	5.320	5.6	5.880	20	11	1600	0.25	5.0	3.0	+0.038
CLL5233B	5.700	6.0	6.300	20	7.0	1600	0.25	5.0	3.5	+0.038
CLL5234B	5.890	6.2	6.510	20	7.0	1000	0.25	5.0	4.0	+0.045
CLL5235B	6.460	6.8	7.140	20	5.0	750	0.25	3.0	5.0	+0.050
CLL5236B	7.125	7.5	7.875	20	6.0	500	0.25	3.0	6.0	+0.058
CLL5237B	7.790	8.2	8.610	20	8.0	500	0.25	3.0	6.5	+0.062
CLL5238B	8.265	8.7	9.135	20	8.0	600	0.25	3.0	6.5	+0.065
CLL5239B	8.645	9.1	9.555	20	10	600	0.25	3.0	7.0	+0.068
CLL5240B	9.500	10	10.50	20	17	600	0.25	3.0	8.0	+0.075
CLL5241B	10.45	11	11.55	20	22	600	0.25	2.0	8.4	+0.076
CLL5242B	11.40	12	12.60	20	30	600	0.25	1.0	9.1	+0.077
CLL5243B	12.35	13	13.65	9.5	13	600	0.25	0.5	9.9	+0.079
CLL5244B	13.30	14	14.70	9.0	15	600	0.25	0.1	10	+0.082


*Available on special order only, please consult factory.

**SURFACE MOUNT
SILICON ZENER DIODE
2.4 VOLTS THRU 75 VOLTS
500mW, 5% TOLERANCE**

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$), $V_F=1.25\text{V MAX @ } I_F=200\text{mA}$ FOR ALL TYPES.

TYPE NO.	ZENER VOLTAGE $V_Z @ I_{ZT}$			TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAXIMUM ZENER VOLTAGE TEMPERATURE COEFFICIENT
	MIN	NOM	MAX		$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$	θ_{VZ}	
	VOLTS	VOLTS	VOLTS	mA	Ω	Ω	mA	μA	VOLTS	%/°C
CLL5245B	14.25	15	15.75	8.5	16	600	0.25	0.1	11	+0.082
CLL5246B	15.20	16	16.80	7.8	17	600	0.25	0.1	12	+0.083
CLL5247B	16.15	17	17.85	7.4	19	600	0.25	0.1	13	+0.084
CLL5248B	17.10	18	18.90	7.0	21	600	0.25	0.1	14	+0.085
CLL5249B	18.05	19	19.95	6.6	23	600	0.25	0.1	14	+0.086
CLL5250B	19.00	20	21.00	6.2	25	600	0.25	0.1	15	+0.086
CLL5251B	20.90	22	23.10	5.6	29	600	0.25	0.1	17	+0.087
CLL5252B	22.80	24	25.20	5.2	33	600	0.25	0.1	18	+0.088
CLL5253B	23.75	25	26.25	5.0	35	600	0.25	0.1	19	+0.089
CLL5254B	25.65	27	28.35	4.6	41	600	0.25	0.1	21	+0.090
CLL5255B	26.60	28	29.40	4.5	44	600	0.25	0.1	21	+0.091
CLL5256B	28.50	30	31.50	4.2	49	600	0.25	0.1	23	+0.091
CLL5257B	21.35	33	34.65	3.8	58	700	0.25	0.1	25	+0.092
CLL5258B	34.20	36	37.80	3.4	70	700	0.25	0.1	27	+0.093
CLL5259B	37.05	39	40.95	3.2	80	800	0.25	0.1	30	+0.094
CLL5260B	40.85	43	45.15	3.0	93	900	0.25	0.1	33	+0.095
CLL5261B	44.65	47	49.35	2.7	105	100	0.25	0.1	36	+0.095
CLL5262B	48.45	51	53.55	2.5	125	1100	0.25	0.1	39	+0.096
CLL5263B	53.20	56	58.80	2.2	150	1300	0.25	0.1	43	+0.096
CLL5264B	57.00	60	63.00	2.1	170	1400	0.25	0.1	46	+0.097
CLL5265B	58.90	62	65.10	2.0	185	1400	0.25	0.1	47	+0.097
CLL5266B	64.60	68	71.40	1.8	230	1600	0.25	0.1	52	+0.097
CLL5267B	71.25	75	78.75	1.7	270	1700	0.25	0.1	56	+0.098

SOD-80 CASE - MECHANICAL OUTLINE

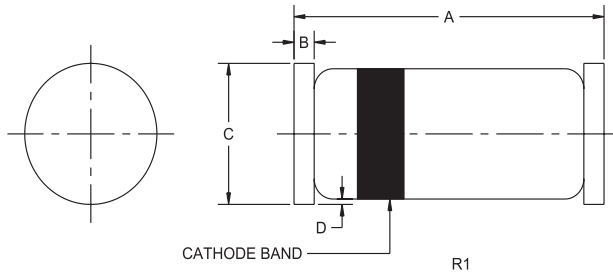

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.130	0.146	3.30	3.71
B	0.016		0.41	
C (DIA)	0.051	0.067	1.30	1.70
D	-	0.004	-	0.10

SOD-80 (REV:R1)

MARKING CODE: CATHODE BAND

R3 (13-November 2002)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.