

CLL4728A
THRU
CLL4764A

SURFACE MOUNT
1.0W SILICON ZENER DIODE
5% TOLERANCE



MELF CASE

CentralTM
Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CLL4728A Series Silicon Zener Diode is a high quality voltage regulator for use in surface mount industrial, commercial, entertainment and computer applications.

MARKING CODE: CATHODE BAND.

ABSOLUTE MAXIMUM RATINGS:

Power Dissipation
Operating and Storage Temperature

SYMBOL

P_D 1.0
 T_J, T_{stg} -65 to +200

UNITS

W
°C


ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$), $V_F=1.2\text{MAX}$ @ $I_F=200\text{mA}$ FOR ALL TYPES.

TYPE NO.	ZENER VOLTAGE	TEST CURRENT	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAXIMUM CURRENT
	$V_Z @ I_{ZT}$	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$	I_{ZM}	
	VOLTS	mA	Ω	Ω	mA	μA	VOLTS	mA
CLL4728A	3.3	76	10	400	1.0	100	1.0	1380
CLL4729A	3.6	69	10	400	1.0	100	1.0	1260
CLL4730A	3.9	64	9.0	400	1.0	50	1.0	1190
CLL4731A	4.3	58	9.0	400	1.0	10	1.0	1070
CLL4732A	4.7	53	8.0	500	1.0	10	1.0	970
CLL4733A	5.1	49	7.0	550	1.0	10	1.0	890
CLL4734A	5.6	45	5.0	600	1.0	10	2.0	810
CLL4735A	6.2	41	2.0	700	1.0	10	3.0	730
CLL4736A	6.8	37	3.5	700	1.0	10	4.0	660
CLL4737A	7.5	34	4.0	700	0.5	10	5.0	605
CLL4738A	8.2	31	4.5	700	0.5	10	6.0	550
CLL4739A	9.1	28	5.0	700	0.5	10	7.0	500
CLL4740A	10	25	7.0	700	0.25	10	7.6	454
CLL4741A	11	23	8.0	700	0.25	5.0	8.4	414
CLL4742A	12	21	9.0	700	0.25	5.0	9.1	380
CLL4743A	13	19	10	700	0.25	5.0	9.9	344
CLL4744A	15	17	14	700	0.25	5.0	11.4	304
CLL4745A	16	15.5	16	700	0.25	5.0	12.2	285
CLL4746A	18	14	20	750	0.25	5.0	13.7	250
CLL4747A	20	12.5	22	750	0.25	5.0	15.2	225
CLL4748A	22	11.5	23	750	0.25	5.0	16.7	205
CLL4749A	24	10.5	25	750	0.25	5.0	18.2	190
CLL4750A	27	9.5	35	750	0.25	5.0	20.6	170
CLL4751A	30	8.5	40	1000	0.25	5.0	22.8	150
CLL4752A	33	7.5	45	1000	0.25	5.0	25.1	135
CLL4753A	36	7.0	50	1000	0.25	5.0	27.4	125
CLL4754A	39	6.5	60	1000	0.25	5.0	29.7	115
CLL4755A	43	6.0	70	1500	0.25	5.0	32.7	110
CLL4756A	47	5.5	80	1500	0.25	5.0	35.8	95
CLL4757A	51	5.0	95	1500	0.25	5.0	38.8	90
CLL4758A	56	4.5	110	2000	0.25	5.0	42.6	80
CLL4759A	62	4.0	125	2000	0.25	5.0	47.1	70
CLL4760A	68	3.7	150	2000	0.25	5.0	51.7	65
CLL4761A	75	3.3	175	2000	0.25	5.0	56	60
CLL4762A	82	3.0	200	3000	0.25	5.0	62.2	55
CLL4763A	91	2.8	250	3000	0.25	5.0	69.2	50
CLL4764A	100	2.5	350	3000	0.25	5.0	76	45

R2 (17-July 2003)

**SURFACE MOUNT
1.0W SILICON ZENER DIODE
5% TOLERANCE**

MELF CASE - MECHANICAL OUTLINE

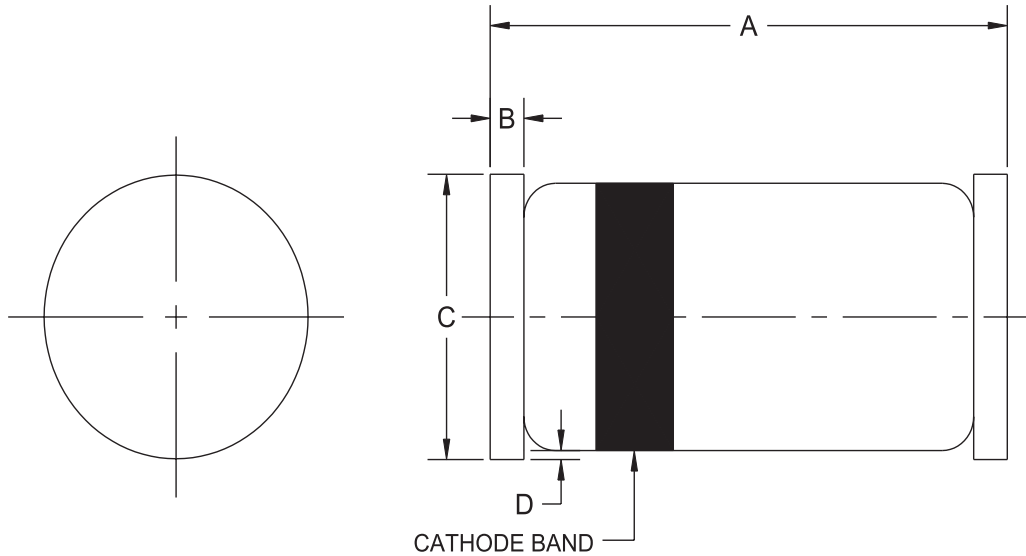

R1

MARKING CODE: CATHODE BAND

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.185	0.209	4.70	5.31
B	0.014	0.022	0.36	0.56
C (DIA)	0.094	0.106	2.39	2.69
D	-	0.008	-	0.20

MELF (REV:R1)

R2 (17-July 2003)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.