


*New Product*

**DO-204AH (DO-35 Glass)**

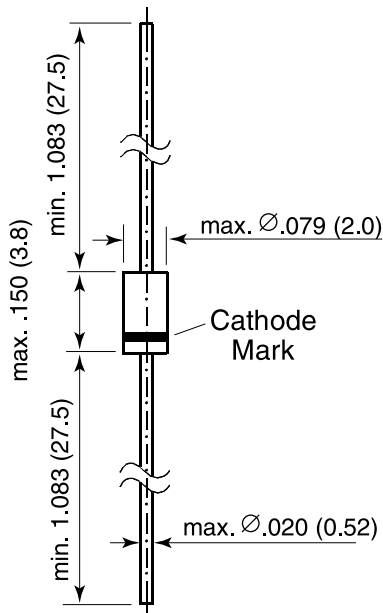

*Dimensions in inches and (millimeters)*

**Features**

- Silicon Planar Power Zener Diodes.
- Voltage spectrum from 2.2V to 38V
- The Zener voltages are graded according to voltage bands instead of by tolerance.
- Low Zener impedance and low leakage current
- Popular in Asian designs

**Mechanical Data**

**Case:** DO-35 Glass Case

**Weight:** approx. 0.13g

**Marking:** | GS |  
                  | Type |  
                  | Grade |

**Packaging Codes/Options:**

D7/10K per 13" reel (52mm tape), 20K/box  
D8/10K per Ammo tape (52mm tape), 20K/box

**Maximum Ratings and Thermal Characteristics** (TA = 25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Power Dissipation	P <sub>d</sub>	500	mW
Junction Temperature	T <sub>j</sub>	175	°C
Storage Temperature Range	T <sub>stg</sub>	-55 to +175	°C

**Zener Diodes**
**Electrical Characteristics** ( $T_J = 25^\circ\text{C}$  unless otherwise noted) Maximum  $V_F = 1.2\text{V}$  at  $I_F = 200\text{mA}$ 

Type	Grade	Zener Voltage $V_Z$ (V) <sup>(1)</sup>		Test Condition $I_Z$ (mA)	Reverse Current		Dynamic Resistance	
		Min	Max		$I_R$ ( $\mu\text{A}$ ) Max	Test Condition $V_R$ (V)	$r_d$ ( $\Omega$ ) Max	Test Condition $I_Z$ (mA)
GZ2	C1	2.2	2.4	5	5	0.5	100	5
GZ2	C2	2.3	2.5	5	5	0.5	100	5
GZ2	C3	2.4	2.6	5	5	0.5	100	5
GZ3	A1	2.5	2.7	5	5	0.5	100	5
GZ3	A2	2.6	2.8	5	5	0.5	100	5
GZ3	A3	2.7	2.9	5	5	0.5	100	5
GZ3	B1	2.8	3.0	5	5	0.5	100	5
GZ3	B2	2.9	3.1	5	5	0.5	100	5
GZ3	B3	3.0	3.2	5	5	0.5	100	5
GZ3	C1	3.1	3.3	5	5	0.5	100	5
GZ3	C2	3.2	3.4	5	5	0.5	100	5
GZ3	C3	3.3	3.5	5	5	0.5	100	5
GZ4	A1	3.4	3.6	5	5	1.0	100	5
GZ4	A2	3.5	3.7	5	5	1.0	100	5
GZ4	A3	3.6	3.8	5	5	1.0	100	5
GZ4	B1	3.7	3.9	5	5	1.0	100	5
GZ4	B2	3.8	4.0	5	5	1.0	100	5
GZ4	B3	3.9	4.1	5	5	1.0	100	5
GZ4	C1	4.0	4.2	5	5	1.0	100	5
GZ4	C2	4.1	4.3	5	5	1.0	100	5
GZ4	C3	4.2	4.4	5	5	1.0	100	5
GZ5	A1	4.3	4.5	5	5	1.5	100	5
GZ5	A2	4.4	4.6	5	5	1.5	100	5
GZ5	A3	4.5	4.7	5	5	1.5	100	5
GZ5	B1	4.6	4.8	5	5	1.5	100	5
GZ5	B2	4.7	4.9	5	5	1.5	100	5
GZ5	B3	4.8	5.0	5	5	1.5	100	5
GZ5	C1	4.9	5.1	5	5	1.5	100	5
GZ5	C2	5.0	5.2	5	5	1.5	100	5
GZ5	C3	5.1	5.3	5	5	1.5	100	5
GZ6	A1	5.2	5.5	5	5	2.0	40	5
GZ6	A2	5.3	5.6	5	5	2.0	40	5
GZ6	A3	5.4	5.7	5	5	2.0	40	5
GZ6	B1	5.5	5.8	5	5	2.0	40	5
GZ6	B2	5.6	5.9	5	5	2.0	40	5
GZ6	B3	5.7	6.0	5	5	2.0	40	5
GZ6	C1	5.8	6.1	5	5	2.0	40	5
GZ6	C2	6.0	6.3	5	5	2.0	40	5
GZ6	C3	6.1	6.4	5	5	2.0	40	5
GZ7	A1	6.3	6.6	5	1	3.5	15	5
GZ7	A2	6.4	6.7	5	1	3.5	15	5
GZ7	A3	6.6	6.9	5	1	3.5	15	5
GZ7	B1	6.7	7.0	5	1	3.5	15	5
GZ7	B2	6.9	7.2	5	1	3.5	15	5
GZ7	B3	7.0	7.3	5	1	3.5	15	5
GZ7	C1	7.2	7.6	5	1	3.5	15	5
GZ7	C2	7.3	7.7	5	1	3.5	15	5
GZ7	C3	7.5	7.9	5	1	3.5	15	5
GZ9	A1	7.7	8.1	5	1	5.0	20	5
GZ9	A2	7.9	8.3	5	1	5.0	20	5
GZ9	A3	8.1	8.5	5	1	5.0	20	5
GZ9	B1	8.3	8.7	5	1	5.0	20	5
GZ9	B2	8.5	8.9	5	1	5.0	20	5
GZ9	B3	8.7	9.1	5	1	5.0	20	5

Note: (1) Tested with 40ms pulse

**Electrical Characteristics** (T<sub>J</sub> = 25°C unless otherwise noted) Maximum V<sub>F</sub>=1.2V at I<sub>F</sub>=200mA

Type	Grade	Zener Voltage V <sub>Z</sub> (V) <sup>(1)</sup>		Test Condition I <sub>Z</sub> (mA)	Reverse Current		Dynamic Resistance	
		Min	Max		I <sub>R</sub> (μA) Max	Test Condition V <sub>R</sub> (V)	r <sub>d</sub> (Ω) Max	Test Condition I <sub>Z</sub> (mA)
GZ9	C1	8.9	9.3	5	1	5.0	20	5
GZ9	C2	9.1	9.5	5	1	5.0	20	5
GZ9	C3	9.3	9.7	5	1	5.0	20	5
GZ11	A1	9.5	9.9	5	1	7.5	25	5
GZ11	A2	9.7	10.1	5	1	7.5	25	5
GZ11	A3	9.9	10.3	5	1	7.5	25	5
GZ11	B1	10.2	10.6	5	1	7.5	25	5
GZ11	B2	10.4	10.8	5	1	7.5	25	5
GZ11	B3	10.7	11.1	5	1	7.5	25	5
GZ11	C1	10.9	11.3	5	1	7.5	25	5
GZ11	C2	11.1	11.6	5	1	7.5	25	5
GZ11	C3	11.4	11.9	5	1	7.5	25	5
GZ12	A1	11.6	12.1	5	1	9.5	35	5
GZ12	A2	11.9	12.4	5	1	9.5	35	5
GZ12	A3	12.2	12.7	5	1	9.5	35	5
GZ12	B1	12.4	12.9	5	1	9.5	35	5
GZ12	B2	12.6	13.1	5	1	9.5	35	5
GZ12	B3	12.9	13.4	5	1	9.5	35	5
GZ12	C1	13.2	13.7	5	1	9.5	35	5
GZ12	C2	13.5	14.0	5	1	9.5	35	5
GZ12	C3	13.8	14.3	5	1	9.5	35	5
GZ15	1	14.1	14.7	5	1	11	40	5
GZ15	2	14.5	15.1	5	1	11	40	5
GZ15	3	14.9	15.5	5	1	11	40	5
GZ16	1	15.3	15.9	5	1	12	45	5
GZ16	2	15.7	16.5	5	1	12	45	5
GZ16	3	16.3	17.1	5	1	12	45	5
GZ18	1	16.9	17.7	5	1	13	55	5
GZ18	2	17.5	18.3	5	1	13	55	5
GZ18	3	18.1	19.0	5	1	13	55	5
GZ20	1	18.8	19.7	2	1	15	60	2
GZ20	2	19.5	20.4	2	1	15	60	2
GZ20	3	20.2	21.1	2	1	15	60	2
GZ22	1	20.9	21.9	2	1	17	65	2
GZ22	2	21.6	22.6	2	1	17	65	2
GZ22	3	22.3	23.3	2	1	17	65	2
GZ24	1	22.9	24.0	2	1	19	70	2
GZ24	2	23.6	24.7	2	1	19	70	2
GZ24	3	24.3	25.5	2	1	19	70	2
GZ27	1	25.2	26.6	2	1	21	80	2
GZ27	2	26.2	27.6	2	1	21	80	2
GZ27	3	27.2	28.6	2	1	21	80	2
GZ30	1	28.2	29.6	2	1	23	100	2
GZ30	2	29.2	30.6	2	1	23	100	2
GZ30	3	30.2	31.6	2	1	23	100	2
GZ33	1	31.2	32.6	2	1	25	120	2
GZ33	2	32.2	33.6	2	1	25	120	2
GZ33	3	33.2	34.6	2	1	25	120	2
GZ36	1	34.2	35.7	2	1	27	140	2
GZ36	2	35.3	36.8	2	1	27	140	2
GZ36	3	36.4	38.0	2	1	27	140	2

Note:(1) Tested with 40ms pulse

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.