

NPN HIGH POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/384

Devices

2N3584

2N3585

Qualified Level

JAN
JANTX
JANTXV

MAXIMUM RATINGS


Ratings	Symbol	2N3584	2N3585	Units
Collector-Emitter Voltage	V_{CEO}	250	300	Vdc
Collector-Base Voltage	V_{CBO}	375	500	Vdc
Collector-Base Voltage	V_{CER}	300	400	Vdc
Emitter-Base Voltage	V_{EBO}	6.0		Vdc
Base Current	I_B	1.0		Adc
Collector Current	I_C	2.0		Adc
Total Power Dissipation		@ $T_A = +25^{\circ}\text{C}$ ⁽¹⁾	2.5	W
		@ $T_C = +25^{\circ}\text{C}$ ⁽²⁾	35	W
Operating & Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		$^{\circ}\text{C}$

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	5.0	$^{\circ}\text{C}/\text{W}$

1) Derate linearly @ 14.85 mW/ $^{\circ}\text{C}$ for $T_A > +25^{\circ}\text{C}$

2) Derate linearly @ 200 mW/ $^{\circ}\text{C}$ for $T_C > +25^{\circ}\text{C}$

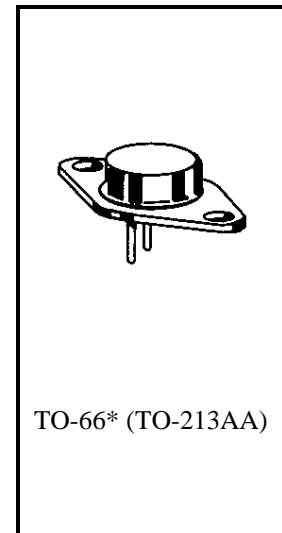

*See Appendix A for Package Outline

ELECTRICAL CHARACTERISTICS ($T_C = 25^{\circ}\text{C}$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage $I_C = 10 \text{ mAdc}$	2N3584 2N3585	$V_{(BR)CEO}$	250 300	Vdc
Collector-Base Breakdown Voltage $I_C = 15 \text{ mAdc}$	2N3584 2N3585	$V_{(BR)CER}$	375 500	Vdc
Collector-Emitter Cutoff Current $V_{CE} = 150 \text{ Vdc}$		I_{CEO}	5.0	mAdc
Collector-Emitter Cutoff Current $V_{CE} = 300 \text{ Vdc}, V_{BE} = 1.5 \text{ Vdc}$ $V_{CE} = 400 \text{ Vdc}, V_{BE} = 1.5 \text{ Vdc}$	2N3584 2N3585	I_{CEX}	1.0 1.0	mAdc
	Emitter-Base Cutoff Current $V_{EB} = 6.0 \text{ Vdc}$		I_{EBO}	

6 Lake Street, Lawrence, MA 01841

1-800-446-1158 / (978) 794-1666 / Fax: (978) 689-0803

120101

Page 1 of 2

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

ON CHARACTERISTICS ⁽³⁾

Forward-Current Transfer Ratio $I_C = 1.0 \text{ Adc}, V_{CE} = 10 \text{ Vdc}$ $I_C = 100 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$	h_{FE}	25 40	100	
Collector-Emitter Saturation Voltage $I_C = 1.0 \text{ Adc}, I_B = 0.125 \text{ Adc}$	$V_{CE(sat)}$		0.75	Vdc
Base-Emitter Saturation Voltage $I_C = 1.0 \text{ Adc}, I_B = 0.1 \text{ Adc}$	$V_{BE(sat)}$		1.4	Vdc

DYNAMIC CHARACTERISTICS

Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 200 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}, f = 5.0 \text{ MHz}$	$ h_{fe} $	3.0	15	
Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 1.0 \text{ Adc}, V_{CE} = 10 \text{ Vdc}, f = 1.0 \text{ kHz}$	h_{fe}	25	200	
Output Capacitance $V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	C_{obo}		120	pF

SWITCHING CHARACTERISTICS

Turn-On Time $V_{CC} = 30 \text{ Vdc}; I_C = 1.0 \text{ Adc}; I_B = 100 \text{ mAdc}; R_C = 29 \Omega$	t_{on}		3.0	μs
Turn-Off Time $V_{CC} = 30 \text{ Vdc}; I_C = 1.0 \text{ Adc}; I_B = -I_B = 100 \text{ mAdc}; R_C = 29 \Omega$	t_{off}		7.0	μs

SAFE OPERATING AREA

DC Tests				
$T_C = +25^\circ\text{C}, 1 \text{ Cycle}, t = 1.0 \text{ s}$				
Test 1				
$V_{CE} = 17.5 \text{ Vdc}, I_C = 2.0 \text{ Adc}$				
Test 2				
$V_{CE} = 100 \text{ Vdc}, I_C = 350 \text{ mAdc}$				
Test 3				
$V_{CE} = 250 \text{ Vdc}, I_C = 37 \text{ mAdc}$				2N3584
$V_{CE} = 300 \text{ Vdc}, I_C = 17 \text{ mAdc}$				2N3585

(3) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.