

PNP DARLINGTON POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/539

Devices

2N6300

2N6301


Qualified Level

JANTX
JANTXV

MAXIMUM RATINGS

Ratings	Symbol	2N6300	2N6301	Units
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CBO}	60	80	Vdc
Emitter-Base Voltage	V_{EBO}	5.0		Vdc
Base Current	I_B	120		mAdc
Collector Current	I_C	8.0		Adc
Total Power Dissipation	P_T	@ $T_C = 0^{\circ}\text{C}$ ⁽¹⁾	75	W
		@ $T_C = 100^{\circ}\text{C}$	32	W
Operating & Storage Junction Temperature Range	T_J, T_{stg}	-55 to +200		$^{\circ}\text{C}$

1) Derate linearly 0.428 W/ $^{\circ}\text{C}$ above $T_C > 0^{\circ}\text{C}$

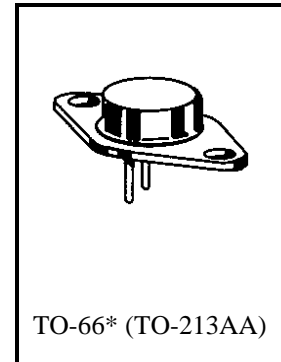

*See appendix A for package outline

ELECTRICAL CHARACTERISTICS ($T_C = 25^{\circ}\text{C}$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage $I_C = 100 \text{ mAdc}$	2N6300 2N6301	$V_{(BR)CEO}$	60 80	Vdc
Collector-Emitter Cutoff Current $V_{CE} = 30 \text{ Vdc}$ $V_{CE} = 40 \text{ Vdc}$	2N6300 2N6301	I_{CEO}	0.5 0.5	mAdc
Collector-Emitter Cutoff Current $V_{CE} = 60 \text{ Vdc}, V_{BE} = -1.5 \text{ Vdc}$ $V_{CE} = 80 \text{ Vdc}, V_{BE} = -1.5 \text{ Vdc}$	2N6300 2N6301	I_{CEX}	0.5 0.5	mAdc
Emitter-Base Cutoff Current $V_{EB} = 5.0 \text{ Vdc}$		I_{EBO}	2.0	mAdc

2N6300, 2N6301 JAN SERIES

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
ON CHARACTERISTICS ⁽²⁾				
Forward-Current Transfer Ratio I _C = 1.0 Adc, V _{CE} = 3.0 Vdc I _C = 4.0 Adc, V _{CE} = 3.0 Vdc I _C = 8.0 Adc, V _{CE} = 3.0 Vdc	h _{FE}	500 750 100	18,000	
Collector-Emitter Saturation Voltage I _C = 4.0 Adc, I _B = 16 mAdc I _C = 8.0 Adc, I _B = 80 mAdc	V _{CE(sat)}		2.0 3.0	Vdc
Base-Emitter Saturation Voltage I _C = 8.0 Adc, I _B = 80 mAdc	V _{BE(sat)}		4.0	Vdc
Base-Emitter Voltage I _C = 4.0 Adc, V _{CE} = 3.0 Vdc	V _{BE(on)}		2.8	Vdc

DYNAMIC CHARACTERISTICS

Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio I _C = 3.0 Adc, V _{CE} = 3.0 Vdc, f = 1.0 MHz	h _{fe}	25	350	
Small-Signal Short-Circuit Forward Current Transfer Ratio I _C = 3.0 Adc, V _{CE} = 3.0 Vdc, f = 1.0 kHz	h _{fe}	300		
Output Capacitance V _{CB} = 10 Vdc, I _E = 0, 100 kHz ≤ f ≤ 1.0 MHz	C _{obo}		200	pF

SWITCHING CHARACTERISTICS

Turn-On Time V _{CC} = 30 Vdc; I _C = 4.0 Adc; I _{B1} = 16 mAdc	t _{on}		2.0	μs
Turn-Off Time V _{CC} = 30 Vdc; I _C = 4.0 Adc; I _{B1} = I _{B2} = 16 mAdc	t _{off}		8.0	μs

SAFE OPERATING AREA

DC Tests T _C = +25°C, 1 Cycle, t = 1.0 s	
Test 1 V _{CE} = 8.0 Vdc, I _C = 8.0 Adc	
Test 2 V _{CE} = 20 Vdc, I _C = 2.0 Adc	
Test 3 V _{CE} = 60 Vdc, I _C = 100 mAdc	2N6300
V _{CE} = 80 Vdc, I _C = 100 mAdc	2N6301

(2) Pulse Test: Pulse Width = 300μs, Duty Cycle ≤ 2.0%.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.