



IRF220/221/222/223**N-CHANNEL
POWER MOSFETS****FEATURES**

- Low $R_{DS(on)}$
- Improved inductive ruggedness
- Fast switching times
- Rugged polysilicon gate cell structure
- Low input capacitance
- Extended safe operating area
- Improved high temperature reliability
- TO-3 package (Standard)

TO-3

**PRODUCT SUMMARY**

Part Number	V _{DS}	R _{DS(on)}	I _D
IRF220	200V	0.80Ω	5.0A
IRF221	150V	0.80Ω	5.0A
IRF222	200V	1.2Ω	4.0A
IRF223	150V	1.2Ω	4.0A

**MAXIMUM RATINGS**

Characteristic	Symbol	IRF220	IRF221	IRF222	IRF223	Unit
Drain-Source Voltage (1)	V _{DSS}	200	150	200	150	V _{dc}
Drain-Gate Voltage (R _{GS} =1.0MΩ) (1)	V _{DGR}	200	150	200	150	V _{dc}
Gate-Source Voltage	V _{GS}	±20				V _{dc}
Continuous Drain Current T _C =25°C	I _D	5.0	5.0	4.0	4.0	A _{dc}
Continuous Drain Current T _C =100°C	I _D	3.0	3.0	2.0	2.0	A _{dc}
Drain Current—Pulsed (3)	I _{DM}	20	20	16	16	A _{dc}
Gate Current—Pulsed	I _{GM}	±1.5				A _{dc}
Total Power Dissipation @ T _C =25°C Derate above 25°C	P _D	40 0.32				Watts W/°C
Operating and Storage Junction Temperature Range	T _J , T _{stg}	-55 to 150				°C
Maximum Lead Temp. for Soldering Purposes, 1/8" from case for 5 seconds	T _L	300				°C

- Notes: (1) T_J=25°C to 150°C
 (2) Pulse test: Pulse width ≤ 300μs, Duty Cycle ≤ 2%
 (3) Repetitive rating: Pulse width limited by max. junction temperature

IRF220/221/222/223

N-CHANNEL
POWER MOSFETSELECTRICAL CHARACTERISTICS (T_C=25°C unless otherwise specified)

Characteristic	Symbol	Type	Min	Typ	Max	Units	Test Conditions
Drain-Source Breakdown Voltage	BV _{DSS}	IRF220 IRF222	200	—	—	V	V _{GS} =0V
		IRF221 IRF223	150	—	—	V	I _D =250μA
Gate Threshold Voltage	V _{GS(th)}	ALL	2.0	—	4.0	V	V _{DS} =V _{GS} , I _D =250μA
Gate-Source Leakage Forward	I _{GSS}	ALL	—	—	100	nA	V _{GS} =20V
Gate-Source Leakage Reverse	I _{GSS}	ALL	—	—	-100	nA	V _{GS} =-20V
Zero Gate Voltage Drain Current	I _{DSS}	ALL	—	—	250	μA	V _{DS} =Max. Rating, V _{GS} =0V
			—	—	1000	μA	V _{DS} =Max. Rating×0.8, V _{GS} =0V, T _C =125°C
On-State Drain-Source Current (2)	I _{D(on)}	IRF220 IRF221	5.0	—	—	A	V _{DS} >I _{D(on)} ×R _{DS(on) max.} , V _{GS} =10V
		IRF222 IRF223	4.0	—	—	A	
Static Drain-Source On-State Resistance (2)	R _{DS(on)}	IRF220 IRF221	—	0.4	0.8	Ω	V _{GS} =10V, I _D =2.5A
		IRF222 IRF223	—	0.8	1.2	Ω	
Forward Transconductance (2)	g _{fs}	ALL	1.3	2.8	—	Ω	V _{DS} >I _{D(on)} ×R _{DS(on) max.} , I _D =2.5A
Input Capacitance	C _{iss}	ALL	—	450	600	pF	V _{GS} =0V, V _{DS} =25V, f=1.0MHz
Output Capacitance	C _{oss}	ALL	—	150	300	pF	
Reverse Transfer Capacitance	C _{rss}	ALL	—	50	80	pF	
Turn-On Delay Time	t _{d(on)}	ALL	—	—	40	ns	V _{DD} =0.5BV _{DSS} , I _D =2.5A, Z _O =50Ω (MOSFET switching times are essentially independent of operating temperature.)
Rise Time	t _r	ALL	—	—	60	ns	
Turn-Off Delay Time	t _{d(off)}	ALL	—	—	100	ns	
Fall Time	t _f	ALL	—	—	60	ns	
Total Gate Charge (Gate-Source Plus Gate-Drain)	Q _g	ALL	—	12.5	15	nC	V _{GS} =10V, I _D =6.0A, V _{DS} =0.8 Max. Rating (Gate charge is essentially independent of operating temperature.)
Gate-Source Charge	Q _{gs}	ALL	—	4.0	—	nC	
Gate-Drain ("Miller") Charge	Q _{gd}	ALL	—	8.5	—	nC	

THERMAL RESISTANCE

Junction-to-Case	R _{thJC}	ALL	—	—	3.12	K/W	
Case-to-Sink	R _{thCS}	ALL	—	0.1	—	K/W	Mounting surface flat, smooth, and greased
Junction-to-Ambient	R _{thJA}	ALL	—	—	30	K/W	Free Air Operation

Notes: (1) T_J=25°C to 150°C

(2) Pulse test: Pulse width≤300μs, Duty Cycle≤2%


(3) Repetitive rating: Pulse width limited by max. junction temperature







**N-CHANNEL
POWER MOSFETS**






IRF220/221/222/223

SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS

Characteristic	Symbol	Type	Min	Typ	Max	Units	Test Conditions
Continuous Source Current (Body Diode)	I_S	IRF220 IRF221	—	—	5.0	A	Modified MOSFET symbol showing the integral reverse P-N junction rectifier 
		IRF222 IRF223	—	—	4.0	A	
Pulse Source Current (Body Diode) (3)	I_{SM}	IRF220 IRF221	—	—	20	A	
		IRF222 IRF223	—	—	16	A	
Diode Forward Voltage (2)	V_{SD}	IRF220 IRF221	—	—	2.0	V	$T_C=25^\circ\text{C}$, $I_S=5.0\text{A}$, $V_{GS}=0\text{V}$
		IRF222 IRF223	—	—	1.8	V	$T_C=25^\circ\text{C}$, $I_S=4.0\text{A}$, $V_{GS}=0\text{V}$
Reverse Recovery Time	t_{rr}	ALL	—	350	—	ns	$T_J=150^\circ\text{C}$, $I_F=5.0\text{A}$, $dI_F/dt=100\text{A}/\mu\text{s}$






Notes: (1) $T_J=25^\circ\text{C}$ to 150°C (2) Pulse test: Pulse width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$
 (3) Repetitive rating: Pulse width limited by max. junction temperature

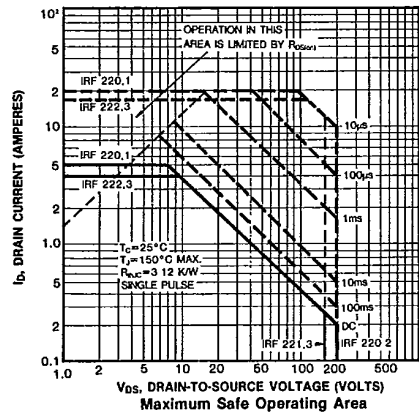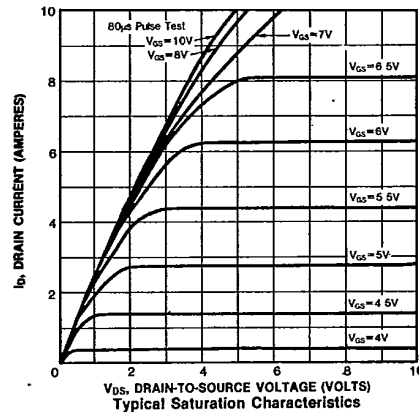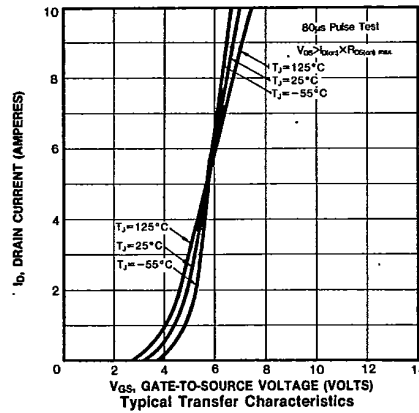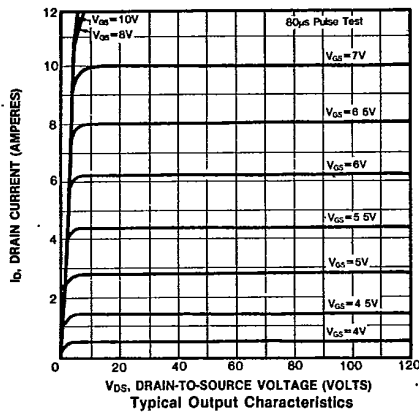

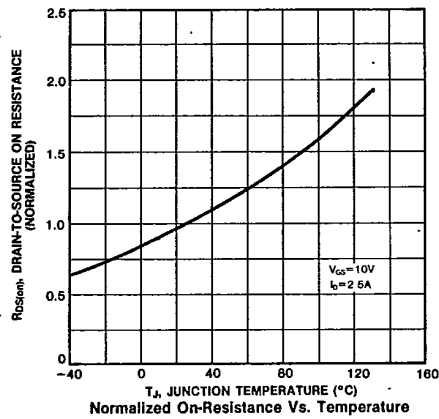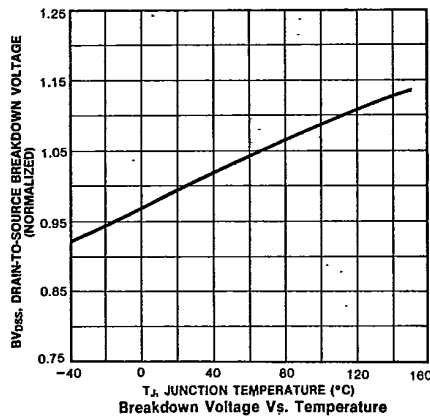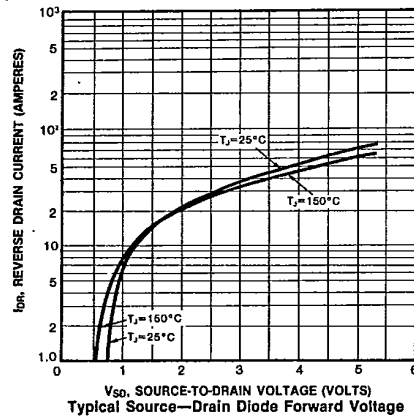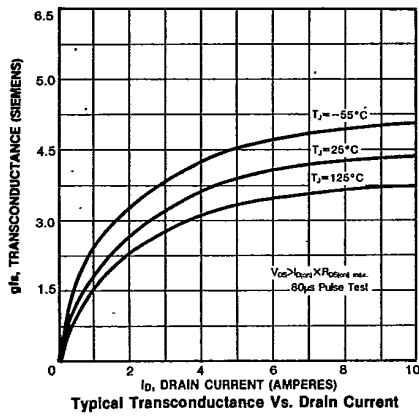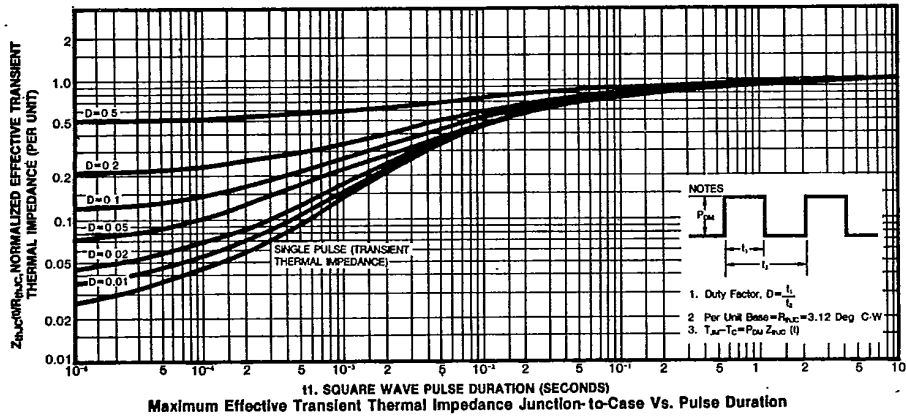

IRF220/221/222/223

**N-CHANNEL
POWER MOSFETS**

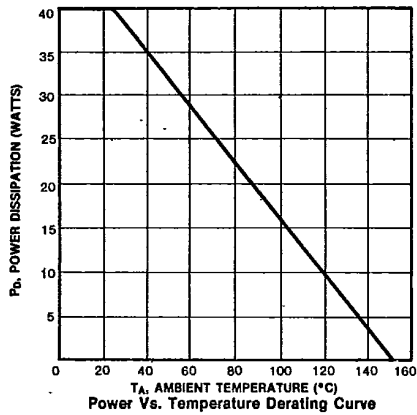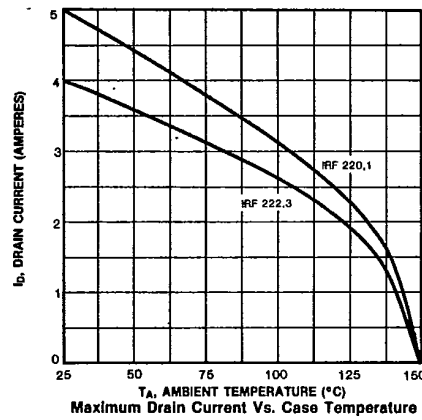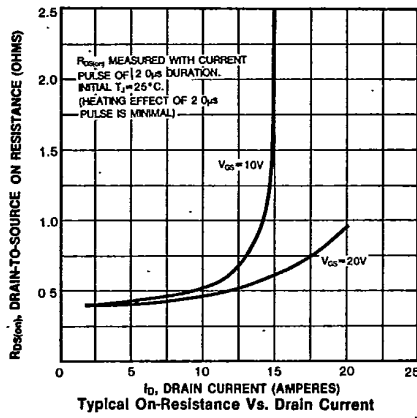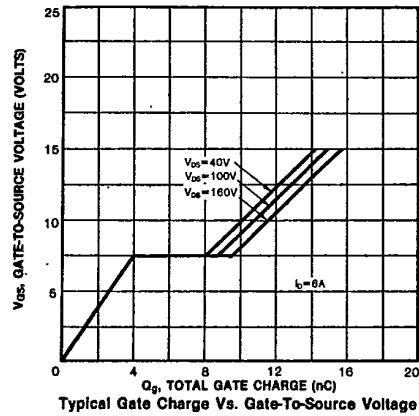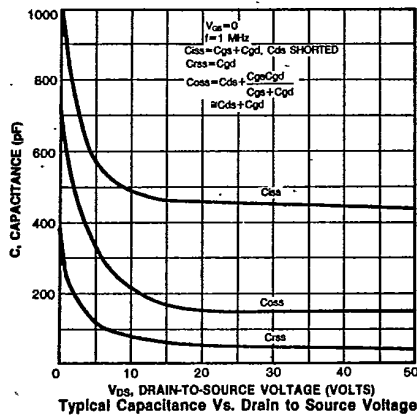

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.