


CLL2003

HIGH VOLTAGE
SWITCHING DIODE



SOD-80 CASE

CentralTM
Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CLL2003 type is a silicon switching diode manufactured by the epitaxial planar process, designed for applications requiring high voltage capability.

Marking Code: Cathode band.


MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

	SYMBOL		UNITS
Continuous Reverse Voltage	V_R	250	V
Peak Repetitive Reverse Voltage	V_{RRM}	250	V
Average Forward Current	I_O	200	mA
Continuous Forward Current	I_F	250	mA
Peak Repetitive Forward Current	I_{FRM}	625	mA
Forward Surge Current, $t_p=1 \mu\text{s}$	I_{FSM}	4000	mA
Forward Surge Current, $t_p=1 \text{s}$	I_{FSM}	1000	mA
Power Dissipation	P_D	500	mW
Operating and Storage			
Junction Temperature	T_J, T_{stg}	-65 to +200	$^{\circ}\text{C}$
Thermal Resistance	Θ_{JA}	350	$^{\circ}\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
BV_R	$I_R=100\mu\text{A}$	250		V
I_R	$V_R=200\text{V}$		100	nA
I_R	$V_R=200\text{V}, T_A=150^{\circ}\text{C}$		100	μA
V_F	$I_F=100\text{mA}$		1.00	V
V_F	$I_F=200\text{mA}$		1.25	V
C_T	$V_R=0, f=1 \text{MHz}$		5.0	pF
t_{rr}	$I_F=I_R=30\text{mA}, \text{RECOV. TO } 3.0\text{mA}, R_L=100\Omega$		50	ns

All dimensions in inches (mm).

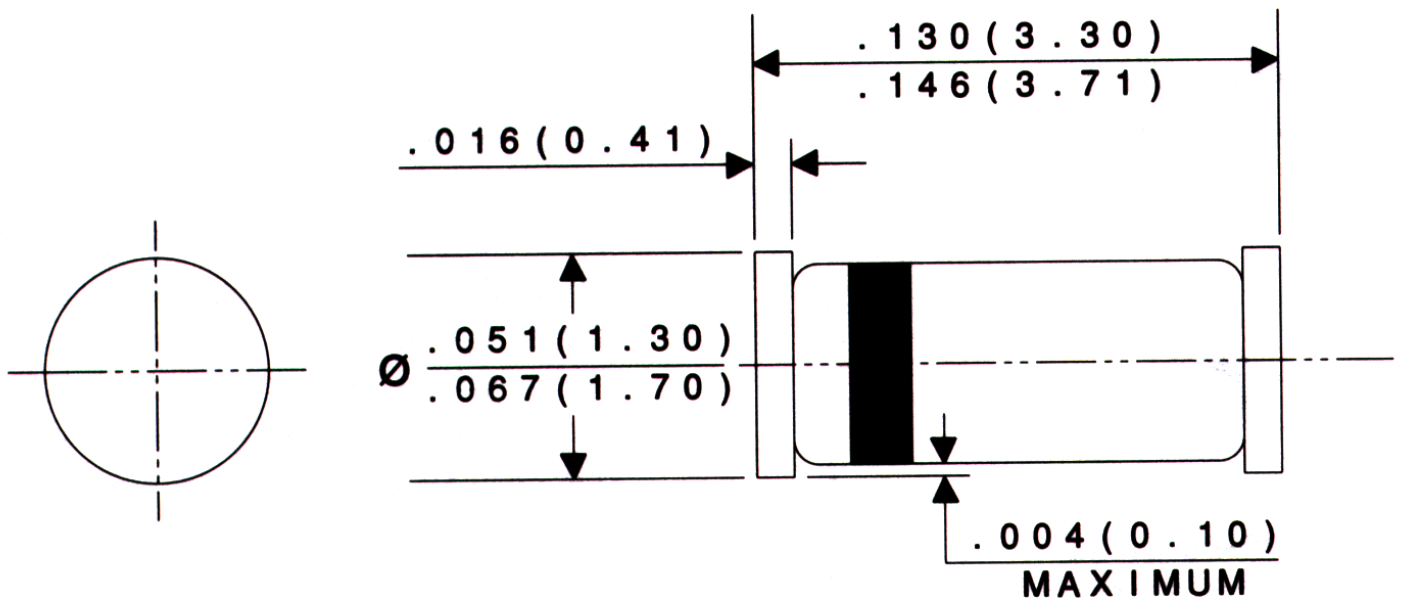



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.