

ER1000 THRU ER1004


SUPERFAST RECOVERY RECTIFIERS

VOLTAGE - 50 to 400 Volts CURRENT - 10.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency
- Low forward voltage, high current capability
- High surge capacity
- Super fast recovery times, high voltage
- Epitaxial chip construction

TO-220AC

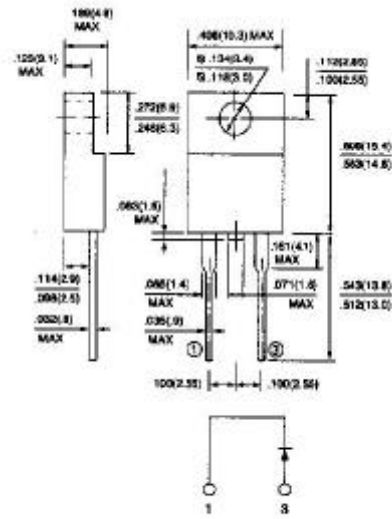

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case: TO-220AC molded plastic

Terminals: Lead, solderable per MIL-STD-202, Method 208

Polarity: As marked

Mounting Position: Any

Weight: 0.08 ounces, 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, Resistive or inductive load.

For capacitive load, derate current by 20%.

	ER1000	ER1001	ER1001A	ER1002	ER1003	ER1004	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	150	200	300	400	V
Maximum RMS Voltage	35	70	105	140	210	320	V
Maximum DC Blocking Voltage	50	100	150	200	300	400	V
Maximum Average Forward Rectified Current at $T_C=100$	10						A
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	150						A
Maximum Forward Voltage at 10.0A per element	0.95			1.30			V
Maximum DC Reverse Current at Rated $T_a=25$ DC Blocking Voltage per element $T_a=125$	10 500						A
Typical Junction capacitance (Note 1)	62						pF
Maximum Reverse Recovery Time(Note 2)	35			50			ns
Typical Thermal Resistance(Note 3) R _{JC}	3.0						/W
Operating and Storage Temperature Range T_J	-55 to +150						

NOTES:

1. Measured at 1 MHz and applied reverse voltage of 4.0 VDC
2. Reverse Recovery Test Conditions: $I_F=.5A$, $I_R=1A$, $I_{rr}=.25A$

3. Thermal resistance junction to CASE
 RATING AND CHARACTERISTIC CURVES
 ER1000 THRU ER1004

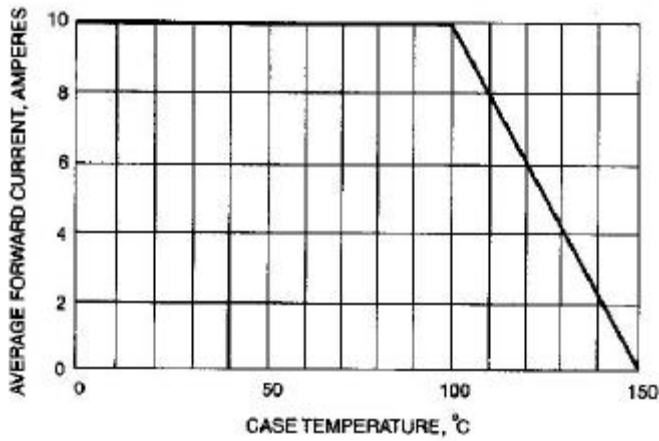


Fig. 1-FORWARD CURRENT DERATING CURVE

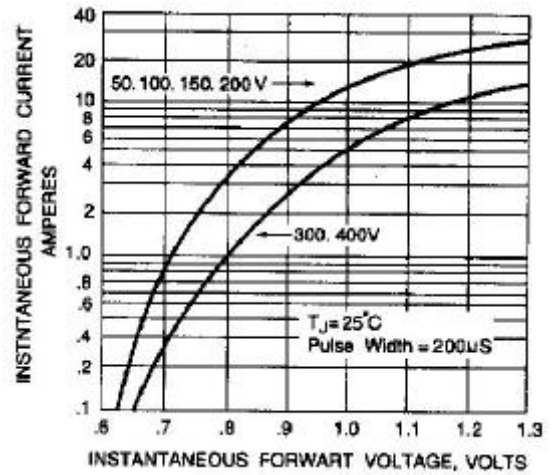


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

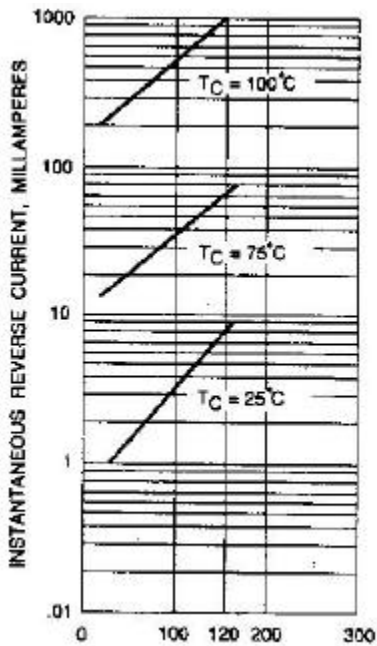


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

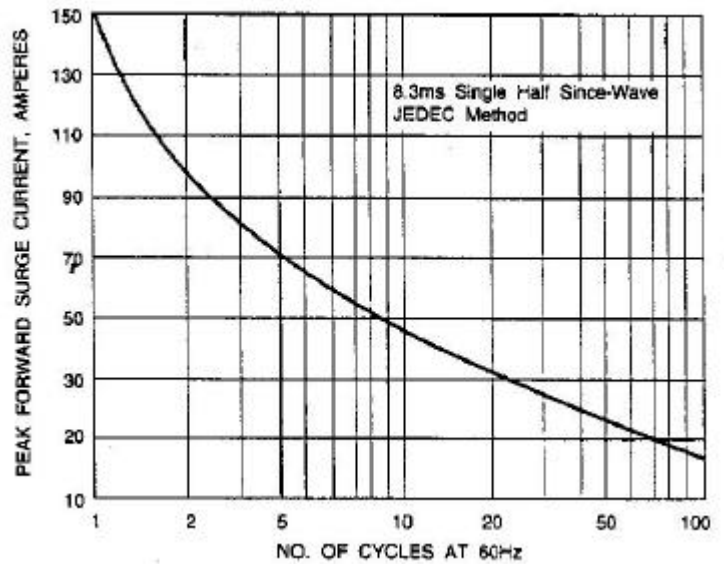


Fig. 4-MAXIMUM NON-REPETITIVE SURGE CURRENT

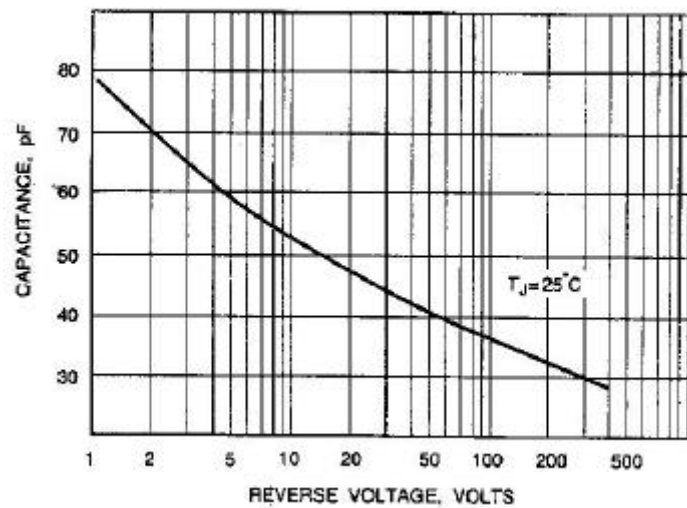


Fig. 5-TYPICAL JUNCTION CAPACITANCE

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.