




FR251 THRU FR257

FAST RECOVERY RECTIFIER
Reverse Voltage - 50 to 1000 Volts
Forward Current - 2.5 Amperes

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Fast switching for high efficiency
- Construction utilizes void-free molded plastic technique
- 2.5 ampere operation at $T_A=85^\circ\text{C}$ with no thermal runaway
- High temperature soldering guaranteed: $250^\circ\text{C}/10$ seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

R-3

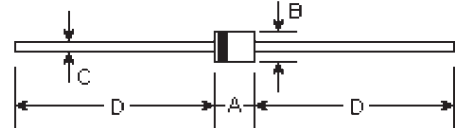

Mechanical Data

- **Case:** R-3 molded plastic body
- **Terminals:** Plated axial leads, solderable per MIL-STD-750, method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any
- **Weight:** 0.021 ounce, 0.60 gram

DIM	DIMENSIONS				Note
	inches		mm		
	Min.	Max.	Min.	Max.	
A	0.138	0.161	3.50	4.10	
B	0.138	0.161	3.50	4.10	ϕ
C	0.040	0.043	1.00	1.10	ϕ
D	1.000	-	25.40	-	

Maximum Ratings and Electrical Characteristics @25°C unless otherwise specified


	Symbols	FR251	FR252	FR253	FR254	FR255	FR256	FR257	FR257-STR	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	1000	Volts
Average forward rectified current at $T_A=85^\circ\text{C}$	$I_{(AV)}$	2.5								Amps
Peak forward surge current 8.3mS single half sine-wave (MIL-STD-750D 4066 method)	I_{FSM}	150.0								Amps
Maximum instantaneous forward voltage at $I_{FM}=2.5\text{A}$, $T_A=25^\circ\text{C}$ (Note 3)	V_F	1.3								Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ / $T_A=55^\circ\text{C}$	I_R	10.0 / 150.0								µA
Maximum reverse recovery time (Note 1)	T_{rr}	150		250		500		250		nS
Typical junction capacitance (Note 2)	C_J	65.0								pF
Operating and storage temperature range	T_J, T_{STG}	-65 to +150								°C

Notes:

- (1) Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$
- (2) Measured at 1.0MHz and applied reverse voltage of 4.0 volts
- (3) Pulse test: pulse width 300µSec, Duty cycle 1%


RATINGS AND CHARACTERISTIC CURVES

Figure 1
Typical Forward Characteristics

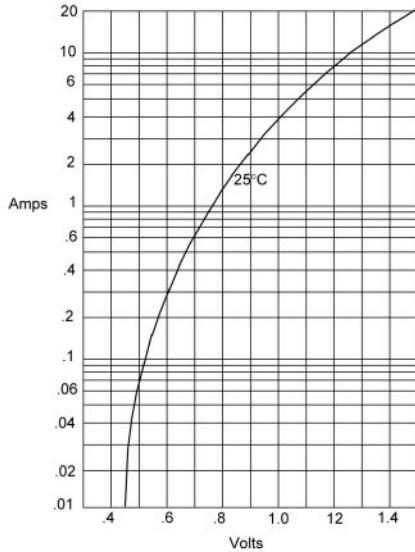


Instantaneous Forward Current - Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

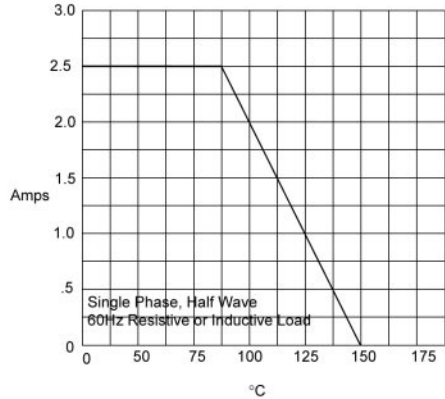

Average Forward Rectified Current - Amperes *versus*
Ambient Temperature - °C


Figure 3
Junction Capacitance

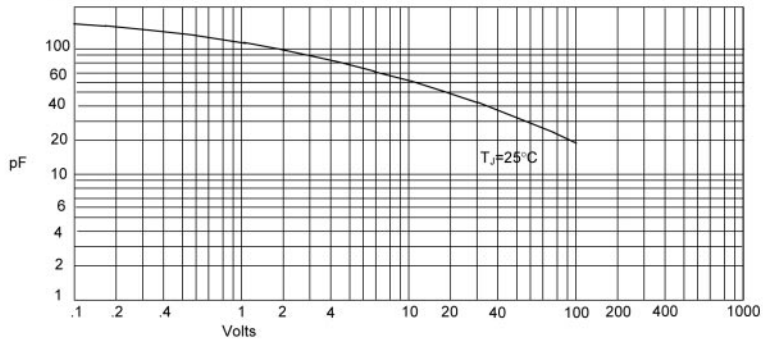

Junction Capacitance - pF *versus*
Reverse Voltage - Volts


RATINGS AND CHARACTERISTIC CURVES

Figure 4
Peak Forward Surge Current

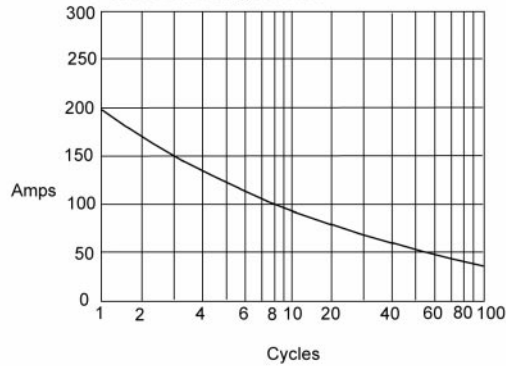


Peak Forward Surge Current - Amperes versus
Number Of Cycles At 60Hz - Cycles

Figure 5
Reverse Recovery Time Characteristic And Test Circuit Diagram

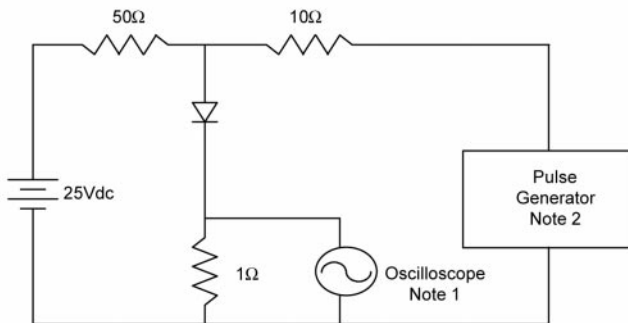

- Notes:
1. Rise Time = 7ns max.
Input impedance = 1 megohm, 22pF
 2. Rise Time = 10ns max.
Source impedance = 50 ohms
 3. Resistors are non-inductive

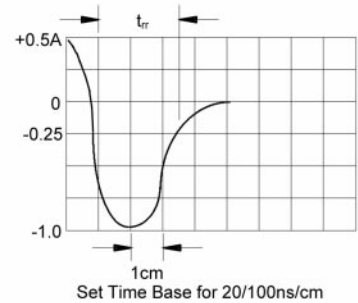



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.