


# BY396P THRU BY399P

## SOFT RECOVER FAST - SWITCHING PLASTIC RECTIFIER

Reverse Voltage - 100 to 800 Volts      Forward Current - 3.0 Amperes

### DO-201AD

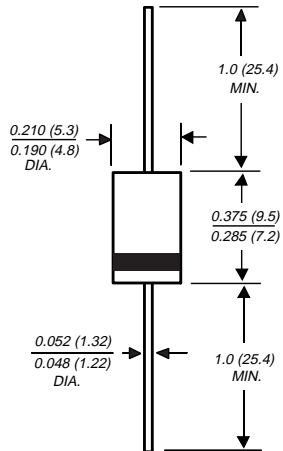

Dimensions in inches and (millimeters)

### FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ High surge current capability
- ◆ Construction utilizes void-free molded plastic technique
- ◆ 3.0 Ampere operation at  $T_A=50^\circ\text{C}$  with no thermal runaway
- ◆ Fast switching for high efficiency
- ◆ High temperature soldering guaranteed:  $250^\circ\text{C}/10$  seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension



### MECHANICAL DATA

**Case:** JEDEC DO-201AD molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.04 ounce, 1.1 grams

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS






Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified.

	SYMBOLS	BY396P	BY397P	BY398P	BY399P	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	100	200	400	800	Volts
Maximum RMS voltage	$V_{RMS}$	70	140	280	560	Volts
Maximum DC blocking voltage	$V_{DC}$	100	200	400	800	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead lengths at $T_A=50^\circ\text{C}$	$I_{(AV)}$	3.0				Amps
Peak forward surge current 10ms single half sine-wave superimposed on rated load at $T_A=50^\circ\text{C}$	$I_{FSM}$	100.0				Amps
Maximum repetitive peak forward surge (NOTE 1)	$I_{FRM}$	10.0				Amps
Maximum instantaneous forward voltage at 3.0A	$V_F$	1.25				Volts
Maximum DC reverse current at rated DC blocking voltage	$I_R$	$T_A=25^\circ\text{C}$ 10.0 $T_A=100^\circ\text{C}$ 500.0				$\mu\text{A}$
Maximum reverse recovery time (NOTE 2)	$t_{rr}$	500.0				ns
Maximum forward recovery time at 100mA, $di/d = 50\text{A}/\mu\text{s}$	$t_{fr}$	1.0				$\mu\text{s}$
Typical junction capacitance (NOTE 3)	$C_J$	28.0				pF
Typical thermal resistance (NOTE 4)	$R_{\theta JA}$	22.0				$^\circ\text{C}/\text{W}$
Operating junction temperature range	$T_J$	-50 to +125				$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-50 to +150				$^\circ\text{C}$

#### NOTES:

- (1) Repetitive peak forward surge current at  $f < 15$  KHz
- (2) Reverse recovery test conditions:  $I_F=10\text{mA}$ ,  $I_R=10\text{mA}$ ,  $I_{rr}=1.0\text{mA}$
- (3) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (4) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length with both leads to heat sink

# RATINGS AND CHARACTERISTIC CURVES BY396P THRU BY399P

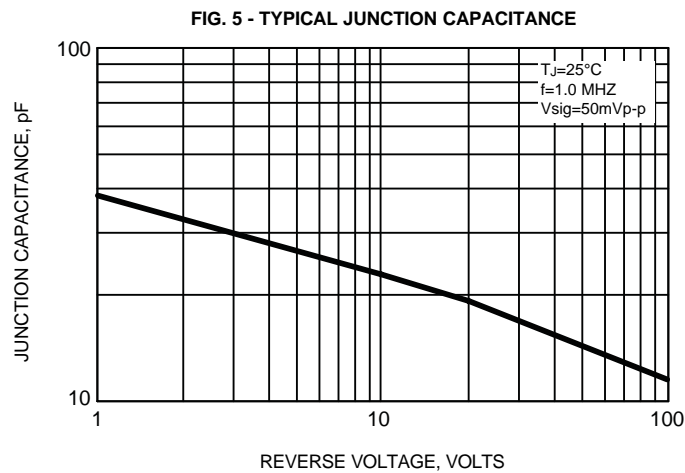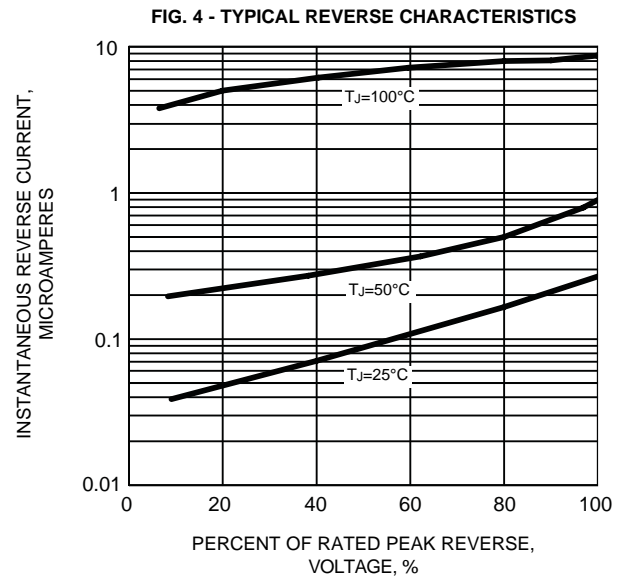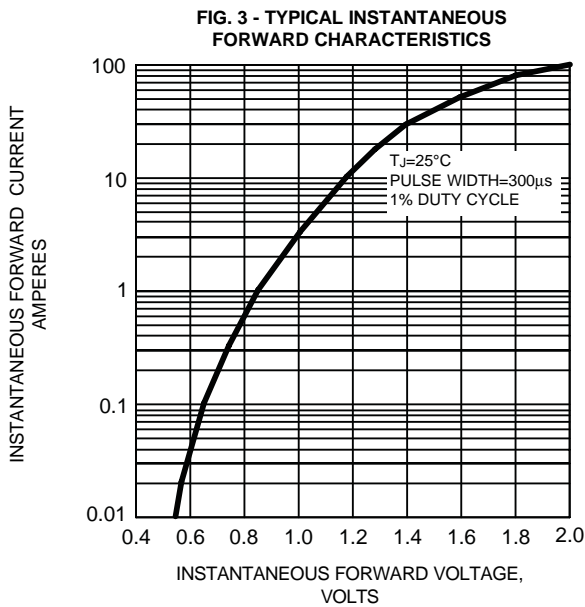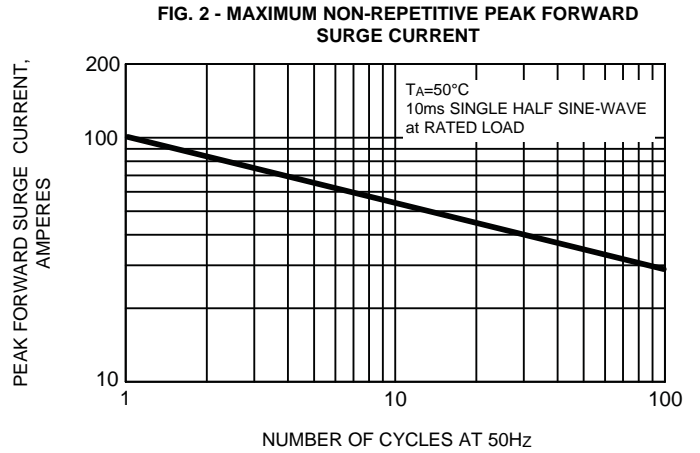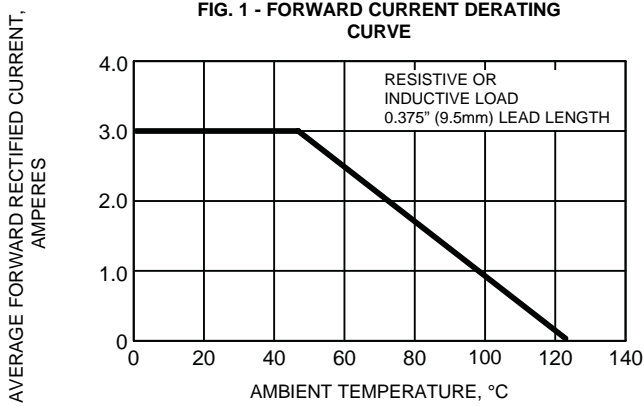



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.