

**FAIRCHILD**  
A Schlumberger Company

**FRM3200CC Series** T-03-19  
**Ultra-fast POWERplanar™**  
**Rectifiers 32 A, 50-200 V**


Power And Discrete Division

**Description**

Designed for use in switching power supplies, inverters and as free-wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 35 ns Reverse Recovery Time
- Soft Recovery ( $S > 0.5$ )
- Low  $I_{R(REC)}$
- 150°C Operating Junction Temperature
- Popular TO-204AA Package (Formerly TO-3)
- Low  $V_{FM}$

TO-204AA



FRM3205CC  
FRM3210CC  
FRM3215CC  
FRM3220CC

2

**Maximum Ratings**

Symbol	Rating	FRM3205CC	FRM3210CC	FRM3215CC	FRM3220CC	Unit
$V_{RRM}$	Peak Repetitive Reverse Voltage	50	100	150	180	V
$V_{RSM}$	Non-repetitive Peak Reverse Voltage	50	100	150	200	
$V_R$	DC Blocking Voltage	50	100	150	180	
$I_{F(AV)}$	Average Rectified Forward Current, $T_C = 107^\circ\text{C}$ , Rated $V_R$	32	32	32	32	A
$I_{FRM}$	Peak Repetitive Forward Current Rated $V_R$ , Square Wave, 50 kHz, $T_C = 107^\circ\text{C}$	64	64	64	64	A
$I_{FSM}$	Non-repetitive Peak Surge Current per Diode, Surge Applied at Rate Load Conditions Halfwave, Single Phase, 60 Hz	200	200	200	200	A
$T_J, T_{stg}$	Operating Junction Temperature and Storage Temperature	-55 to +150	-55 to +150	-55 to +150	-55 to +150	°C

**Maximum Thermal Characteristics**

Symbol	Rating	FRM3205CC	FRM3210CC	FRM3215CC	FRM3220CC	Unit
$R_{\theta JC}$	Maximum Thermal Resistance, Junction to Case	1.0	1.0	1.0	1.0	°C/W
$R_{\theta JA}$	Maximum Thermal Resistance, Junction to Ambient	60	60	60	60	

**Notes**

For information concerning connection diagram and package outline, refer to Section 7.

FRM3200CC Series

T-03-19

Symbol	Rating	FRM3205CC	FRM3210CC	FRM3215CC	FRM3220CC	Unit
<b>Electrical Characteristics per Diode</b>						
$V_{FM}^1$	Maximum Instantaneous Forward Voltage per Diode $I_F = 16 \text{ A}$ , $T_C = 150^\circ\text{C}$ $I_F = 16 \text{ A}$ , $T_C = 25^\circ\text{C}$	0.80 0.95	0.80 0.95	0.80 0.95	0.80 0.95	V
$I_{RRM}^1$	Maximum Instantaneous Reverse Current per Diode Rated DC Voltage, $T_C = 125^\circ\text{C}$ Rated DC Voltage, $T_C = 25^\circ\text{C}$	10 25	10 25	10 25	10 25	mA $\mu\text{A}$
$t_{rr}$	Maximum Reverse Recovery Time $I_F = 1.0 \text{ A}$ , $di_F/dt = 50 \text{ A}/\mu\text{s}$ $I_F = 16 \text{ A}$ , $di_F/dt = 100 \text{ A}/\mu\text{s}$	35 50	35 50	35 50	35 50	ns
$I_{R(REC)}^2$	Maximum Reverse Recovery Current $I_F = 16 \text{ A}$ , $di_F/dt = 100 \text{ A}/\mu\text{s}$ , $V_R = V_{RRM}$	2.5	2.5	2.5	2.5	A

Notes

1. Pulse Test: Pulse Width = 300  $\mu\text{s}$ . Duty Cycle  $\leq 2.0\%$
2. See Figure 10 for test conditions.

Performance Curves per Diode

Figure 1 Maximum Forward Voltage Drop


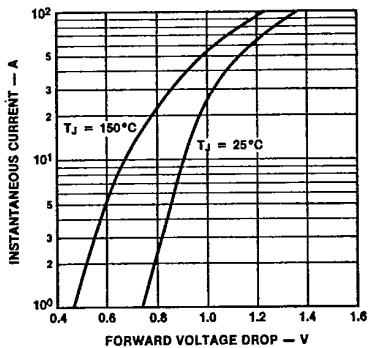


Figure 2 Maximum Power Dissipation

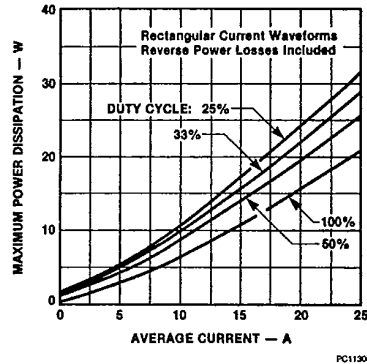


FRM3200C Series

T-03-19


Performance Curves per Diode (Cont.)

Figure 3 Transient Thermal Resistance

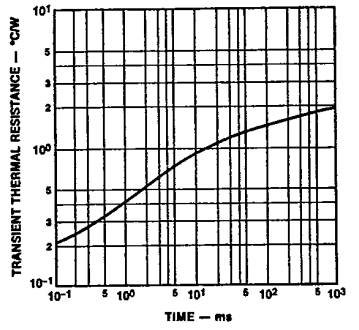


PC11390F

Figure 4 Typical Reverse Leakage Current




PC11390F

Figure 5 Average Power Derating




PC11400F

Figure 6 Reverse Recovery Charge



PC11340F

Figure 7 Reverse Recovery Time



PC11350F

2

FRM3200CC Series

T-03-19

Performance Curves per Diode (Cont.)

Figure 8 Reverse Recovery Current

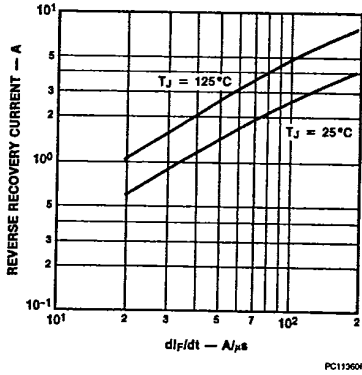


Figure 9 Reverse Recovery Softness


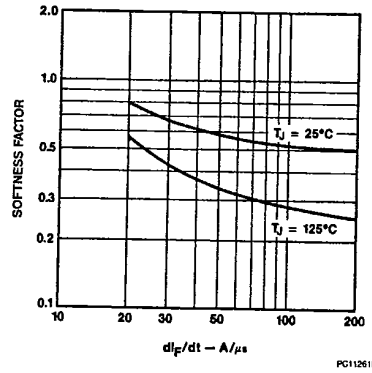


Figure 10 Reverse Recovery Test Waveform

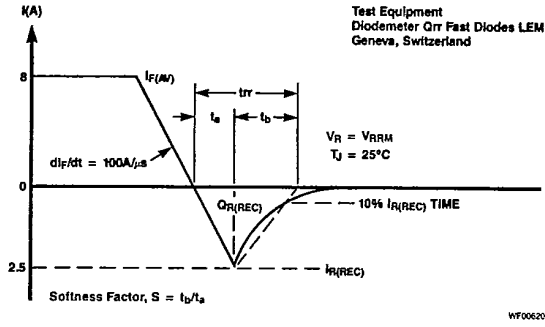

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.