


Fast Recovery Single Diode Module 200 Amperes/1000 Volts



Outline Drawing

Dimension	Inches	Millimeters
A	2.106	53.5
B	1.705±0.008	43.3±0.2
C	1.437	36.5
D	1.299	33
E	0.925	23.5
F	0.866	22
G	0.551	14
H	0.354	9
J	0.315	8
K	0.276	7
L	0.236 R	R6
M	0.209	5.3
N	0.209 Dia.	Dia. 5.3
P	0.177	4.5
Q	0.138	3.5
R	M4 Metric	M4

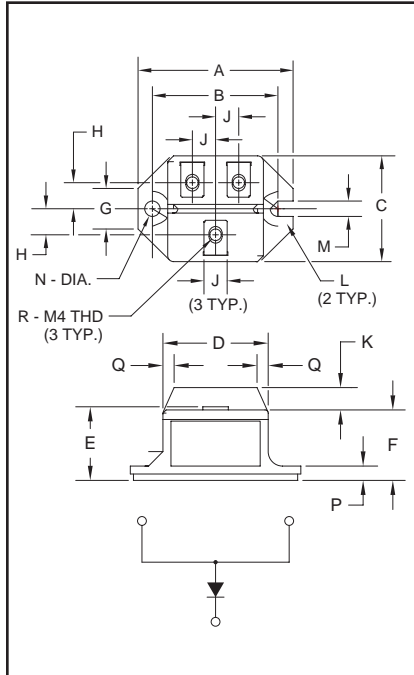

CS241020
Fast Recovery
Single Diode Module
200 Amperes/1000 Volts

Description:

Powerex Fast Recovery Single Diode Modules are designed for use in applications requiring fast switching. The modules are isolated for easy mounting with other components on common heatsinks.

Features:

- Isolated Mounting
- Planar Chips

Applications:

- Free Wheeling

Ordering Information:

Select the complete eight digit module part number you desire from the table below.

Example: CS241020 is a 1000 Volt, 200 Ampere Fast Recovery Single Diode Module.

Type	Voltage Volts (x100)	Current Rating Amperes (x10)
CS64	10	20

CS241020

Fast Recovery Single Diode Module



200 Amperes/1000 Volts

Absolute Maximum Ratings

Characteristics	Symbol	CS241020	Units
Peak Reverse Blocking Voltage	V_{RRM}	1000	Volts
Transient Peak Reverse Blocking Voltage (Non-Repetitive), $t < 5ms$	V_{RSM}	1100	Volts
DC Reverse Blocking Voltage	$V_{R(DC)}$	800	Volts
DC Current, $T_C = 75^\circ C$	I_{FM}	200	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (60Hz)	$I_{F(DC)}$	2000	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz)	I_{FSM}	1825	Amperes
I^2t (for Fusing), 8.3 milliseconds	I^2t	16500	A ² sec
Storage Temperature	T_{STG}	-40 to 125	°C
Operating Temperature	T_j	-40 to 150	°C
Maximum Mounting Torque M5 Mounting Screw	—	17	in.-lb.
Maximum Mounting Torque M4 Terminal Screw	—	12	in.-lb.
Module Weight (Typical)	—	90	Grams
V Isolation	V_{RMS}	2500	Volts

Electrical and Thermal Characteristics, $T_j = 25^\circ C$ unless otherwise specified

Characteristics	Symbol	Test Conditions	CS241020	Units
Blocking State Maximums				
Forward Leakage Current, Peak	I_{RRM}	$T_j = 150^\circ C, V_{DRM} = \text{Rated}$	40	mA
Conducting State Maximums				
Peak On-State Voltage	V_{FM}	$I_{FM} = 200A$	1.5	Volts
Switching Maximums				
Reverse Recovery Time	t_{rr}	$I_{FM} = 200A, T_j = 150^\circ C$ $di/dt = -400A/\mu s, V_R = 600V$	0.8	μs
Reverse Recovery Charge	Q_{rr}	$I_{FM} = 200A, T_j = 150^\circ C$ $di/dt = -400A/\mu s, V_R = 600V$	80	μC
Thermal Maximums				
Thermal Resistance, Junction-to-Case	$R_{\theta(J-C)}$	Per Module	0.25	°C/Watt
Thermal Resistance, Case-to-Sink (Lubricated)	$R_{\theta(C-S)}$	Per Module	0.15	°C/Watt

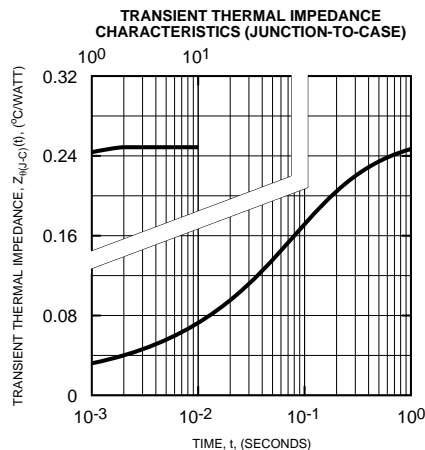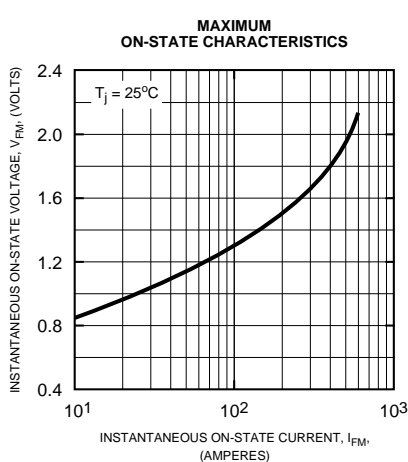



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.