


Fast Recovery Single Diode Module 300 Amperes/1200 Volts



Outline Drawing

Dimension	Inches	Millimeters
A	3.630±0.01	92.2±0.25
B	3.150±0.008	80±0.2
C	2.657±0.01	67.5±0.25
D	1.378±0.012-0.000	35±0.3-0.0
E	1.220	31
F	1.102	28
G	1.024	26
H	0.591	15
J	0.571	14.5
K	0.213±0.004 Dia.	Dia. 5.4±0.1
L	0.177	4.5
M	0.118	3
N	M6 Metric	M6

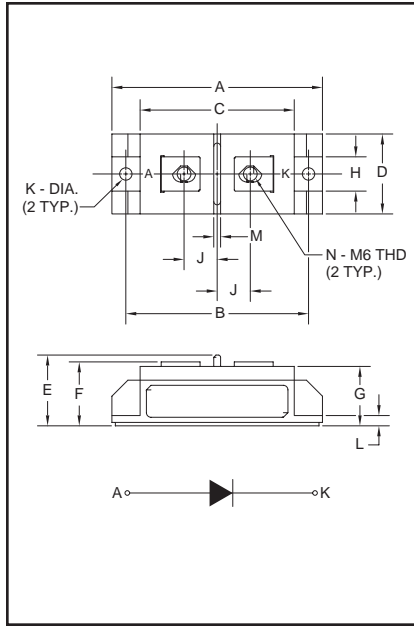

CS641230
Fast Recovery
Single Diode Module
300 Amperes/1200 Volts

Description:

Powerex Fast Recovery Single Diode Modules are designed for use in applications requiring fast switching. The modules are isolated for easy mounting with other components on common heatsinks.

Features:

Isolated Mounting

Planar Chips

Applications:

Inverters

Choppers

Switching Power Supplies

Free Wheeling

Ordering Information:

Select the complete eight digit module part number you desire from the table below.

Example: CS641230 is a 1200 Volt, 300 Ampere Fast Recovery Single Diode Module.

Type	Voltage Volts (x100)	Current Rating Amperes (x10)
CS64	12	30



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

CS641230

Fast Recovery Single Diode Module

300 Amperes/1200 Volts

Absolute Maximum Ratings

Characteristics	Symbol	CS641230	Units
Peak Reverse Blocking Voltage	V_{RRM}	1200	Volts
Transient Peak Reverse Blocking Voltage (Non-Repetitive), $t < 5ms$	V_{RSM}	1350	Volts
DC Reverse Blocking Voltage	$V_{R(DC)}$	960	Volts
DC Current, $T_C = 75^\circ C$	$I_{F(DC)}$	300	Amperes
Peak Half-Cycle Surge (Non-Repetitive) On-State Current (60Hz)	I_{FSM}	3000	Amperes
I^2t (for Fusing), 8.3 milliseconds	I^2t	37500	A ² sec
Junction Temperature	T_j	-40 to 150	°C
Storage Temperature	T_{STG}	-40 to 125	°C
Maximum Mounting Torque M5 Mounting Screw	—	17	in.-lb.
Maximum Mounting Torque M6 Terminal Screw	—	26	in.-lb.
Module Weight (Typical)	—	200	Grams
V Isolation	V_{RMS}	2500	Volts

CS641230

Fast Recovery Single Diode Module


300 Amperes/1200 Volts

Electrical and Thermal Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified


Characteristics	Symbol	Test Conditions	CS641230	Units
Blocking State Maximums				
Reverse Leakage Current, Peak	I_{RRM}	$T_j = 150^\circ\text{C}$, $V_{RRM} = \text{Rated}$	40	mA
Conducting State Maximums				
Peak On-State Voltage	V_{FM}	$I_{FM} = 300\text{A}$, $T_j = 25^\circ\text{C}$	1.5	Volts
Switching Maximums				
Reverse Recovery Time	t_{rr}	$I_{FM} = 300\text{A}$, $T_j = 150^\circ\text{C}$ $di/dt = -600\text{A}/\mu\text{s}$, $V_R = 600\text{V}$	0.8	μs
Reverse Recovery Charge	Q_{rr}	$I_{FM} = 300\text{A}$, $T_j = 150^\circ\text{C}$ $di/dt = -600\text{A}/\mu\text{s}$, $V_R = 600\text{V}$	80	μC
Thermal Maximums				
Thermal Resistance, Junction-to-Case	$R_{\theta(J-C)}$	Per Module	0.2	$^\circ\text{C}/\text{Watt}$
Thermal Resistance, Case-to-Sink (Lubricated)	$R_{\theta(C-S)}$	Per Module	0.15	$^\circ\text{C}/\text{Watt}$
Isolation Resistance, Main Terminal-to-Case	—	Per Module	10 (minimum)	$\text{m}\Omega$

CS641230
Fast Recovery Single Diode Module
 300 Amperes/1200 Volts


MAXIMUM FORWARD VOLTAGE

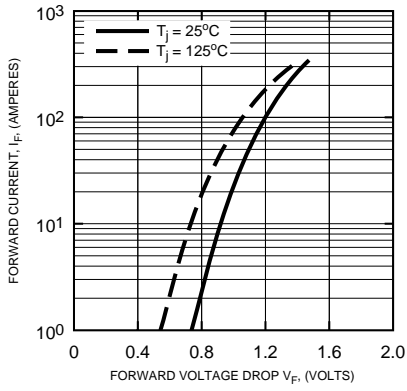


REVERSE RECOVERY CHARACTERISTICS

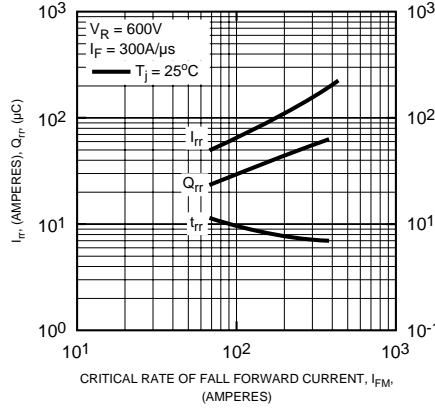

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION-TO-CASE)

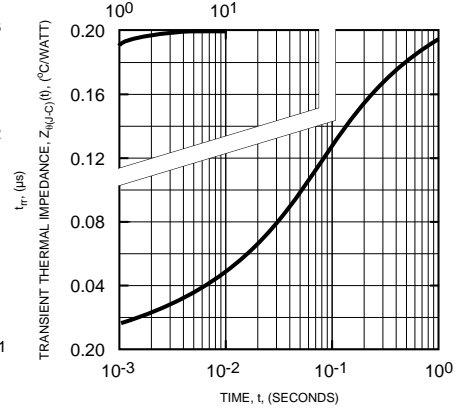

RATED SURGE (NON-REPETITIVE) CURRENT

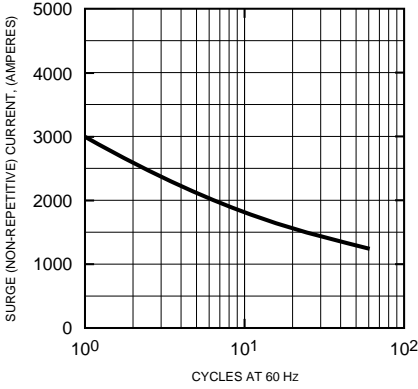



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.