


CMPD7000

DUAL SILICON SWITCHING DIODE SERIES CONNECTION



SOT-23 CASE

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMPD7000 type is an ultra-high speed silicon switching diodes manufactured by the epitaxial planar process, in an epoxy molded surface mount package, connected in a series configuration, designed for high speed switching applications.

Marking Code is C5C.



MAXIMUM RATINGS (T_A=25°C)

	SYMBOL		UNITS
Peak Repetitive Reverse Voltage	V _{RRM}	100	V
Average Forward Current	I _O	200	mA
Peak Forward Current	I _{FM}	500	mA
Power Dissipation	P _D	350	mW
Operating and Storage Junction Temperature	T _J , T _{stg}	-65 to +150	°C
Thermal Resistance	θ _{JA}	357	°C/W

ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
BV _R	I _R =100μA	100			V
I _R	V _R =50V			300	nA
I _R	V _R =50V, T _A =125°C			100	μA
I _R	V _R =100V			500	nA
V _F	I _F =1.0mA	0.55		0.70	V
V _F	I _F =10mA	0.67		0.82	V
V _F	I _F =100mA	0.75		1.10	V
C _T	V _R =0, f=1 MHz			1.5	pF
t _{rr}	I _R =I _F =10mA, R _L =100Ω, Rec. to 1.0mA		2.0	4.0	ns

All dimensions in inches (mm).

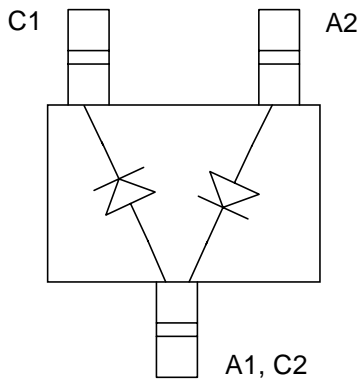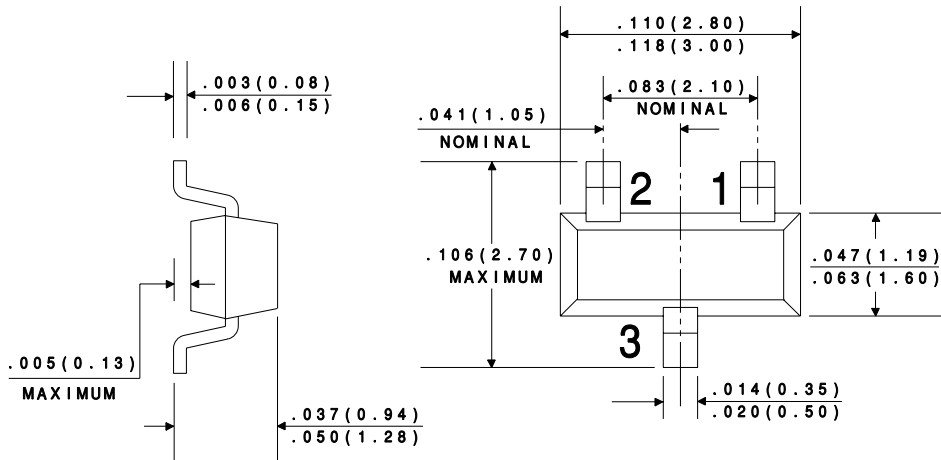



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.