



High Voltage Diode H1153

Designed for High Temperature Operation
Low RFI/EMI

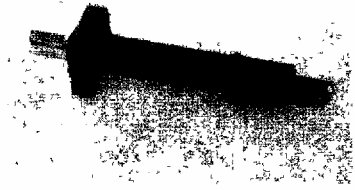

LTR.	INCHES	MILLIMETERS
A	.360 Dia.	9,14 Dia.
B	.50 Dia.	12,70 Dia.
C	3.7	94
D	1.18 Dia.	29,97 Dia.
E	.4	10,2
F	.750	19,05
G	.050	1,27
H	.60 Dia.	15,24
I	.40	10,16

Dimensional Tolerances .X ± .1, .XX ± .02, .XXX ± .005 inch.

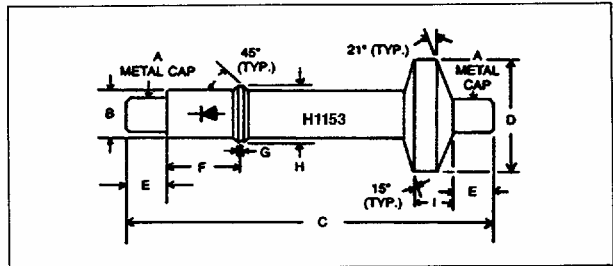


MAXIMUM RATINGS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

RATING	SYMBOL		UNITS
Repetitive Peak Reverse Voltage See Fig. 1 & 2	V_{RRM}	45	KV
Average Forward Current (Fig. 1)	$I_{F(AV)}$	2.2	mA
Peak Surge Current, 1/2 Cycle at 60Hz, (Non-Rep)	I_{FSM}	200	mA
Maximum Ambient Operating Temperature	T_A	90	$^\circ\text{C}$
These maximum ratings cannot necessarily be used simultaneously; see Fig. 1—Safe Operating Areas.			

ELECTRICAL CHARACTERISTICS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

CHARACTERISTICS	SYMBOL		UNITS
Maximum Reverse Current at $V_R = 45\text{kV}$	I_R	1	μA
Maximum Forward Voltage Drop at $I_F = 5\text{mA}$	V_{FM}	180	V
Max. Anode to Cathode Capacitance at $V_R = 400\text{V}$, $F = 100\text{kHz}$	C_J	0.75	pF
Max. Reverse Recovery Time, $I_F = 2\text{mA}$, $I_R = -4\text{mA}$ and $I_{RR} = -1\text{mA}$ (Fig. 3)	t_r	175	nsec

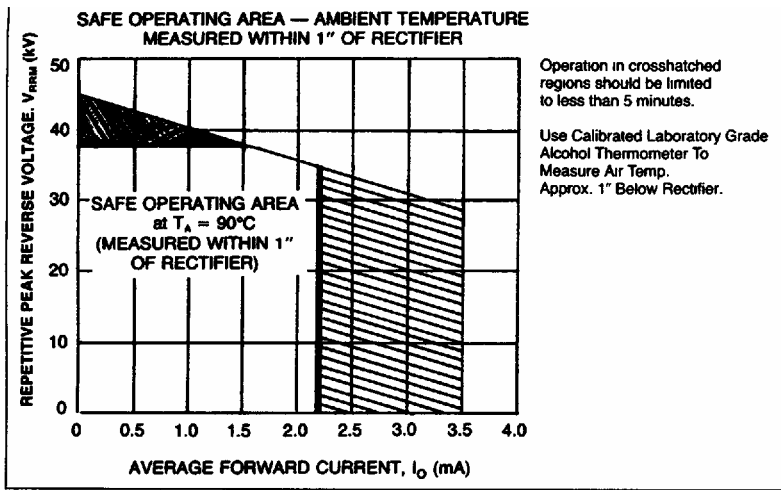

T-03-15

FIGURE 1


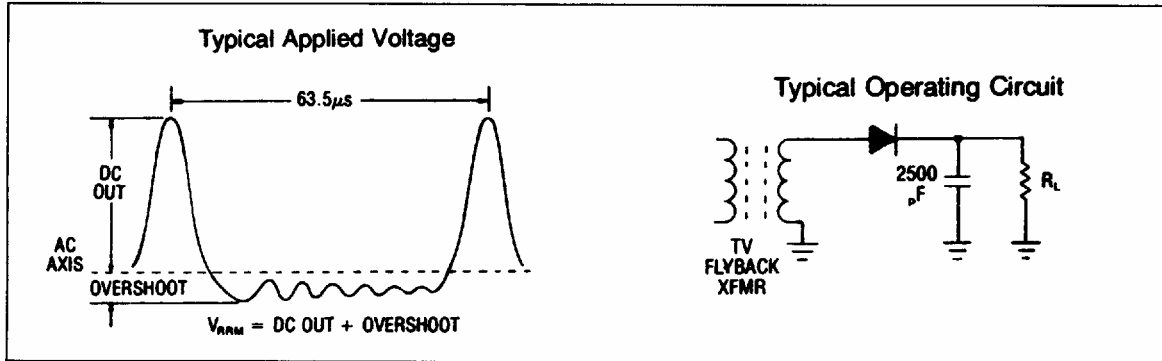


FIGURE 2

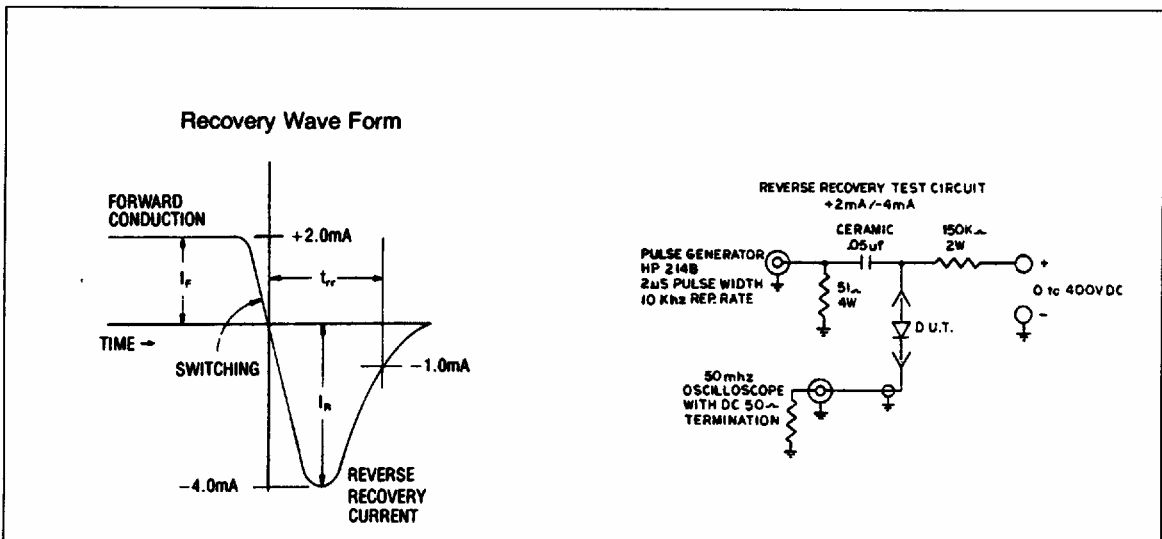

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.