



2SA 816 · 2SC 1626

PNP · NPN SILICON PLANAR EPITAXIAL POWER TRANSISTORS

MICRO ELECTRONICS

CASE TO-220B

THE 2SA816 (PNP) AND 2SC1626 (NPN) ARE SILICON PLANAR EPITAXIAL COMPLEMENTARY PAIR SPECIALLY DESIGNED FOR THE DRIVER STAGES OF 30-50W HI-FI AMPLIFIERS. THEY ARE ALSO SUITABLE FOR MEDIUM SPEED SWITCHING UP TO 2A PEAK CURRENT.



ABSOLUTE MAXIMUM RATINGS

For p-n-p devices, voltage and current values are negative.

Collector-Base Voltage	V_{CB0}	80V
Collector-Emitter Voltage	V_{CEO}	80V
Emitter-Base Voltage	V_{EB0}	5V
Collector Current	I_C	750mA
Collector Peak Current ($t \leq 10\text{ms}$)	I_{CM}	2A
Total Power Dissipation @ $T_C \leq 25^\circ\text{C}$	P_{tot}	10W
@ $T_A \leq 25^\circ\text{C}$		1.5W
Junction Temperature	T_j	150°C
Storage Temperature Range	T_{stg}	-55 to +150°C

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITIONS
Collector-Base Breakdown Voltage	BV_{CB0}	80			V	$I_C=0.1\text{mA}$ $I_B=0$
Collector-Emitter Breakdown Voltage	$LV_{CEO} *$	80			V	$I_C=10\text{mA}$ $I_B=0$
Collector Cutoff Current	I_{CBO}			0.5	μA	$V_{CB}=30\text{V}$ $I_E=0$
Emitter Cutoff Current	I_{EBO}			1	μA	$V_{EB}=5\text{V}$ $I_C=0$
Collector-Emitter Saturation Voltage	$V_{CE(sat)} *$			0.5	V	$I_C=500\text{mA}$ $I_B=50\text{mA}$
Base-Emitter Voltage	$V_{BE} *$			1	V	$I_C=500\text{mA}$ $V_{CE}=2\text{V}$
D.C. Current Gain (Note)	$H_{FE} 1 *$	70		240		$I_C=150\text{mA}$ $V_{CE}=2\text{V}$
	$H_{FE} 2 *$	40				$I_C=500\text{mA}$ $V_{CE}=2\text{V}$
Current Gain-Bandwidth Product	f_T	50	100		MHz	$I_C=150\text{mA}$ $V_{CE}=2\text{V}$
Collector-Base Capacitance	C_{ob}	2SA816		20	pF	$V_{CB}=10\text{V}$ $I_E=0$
		2SC1626		13	pF	$f=1\text{MHz}$

*Pulse Test : Pulse Width=0.3ms, Duty Cycle=1%

note : $H_{FE} 1$ is classified as follows. Group 0 : 70-140, Group Y : 120-240

MICRO ELECTRONICS LTD.





38 HUNG TO ROAD, KWUN TONG, HONG KONG. TELEX 43510
KWUN TONG P. O. BOX 69477 CABLE ADDRESS "MICROTRON"
TELEPHONE: 3-430181-6 3-893969 3-892423

FAX: 3-410321

1-2-BMP

TYPICAL CHARACTERISTICS

($T_A=25^\circ\text{C}$ unless otherwise noted)

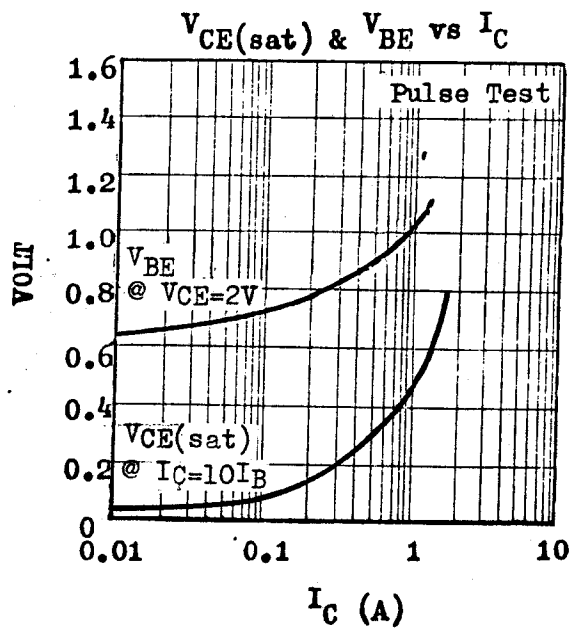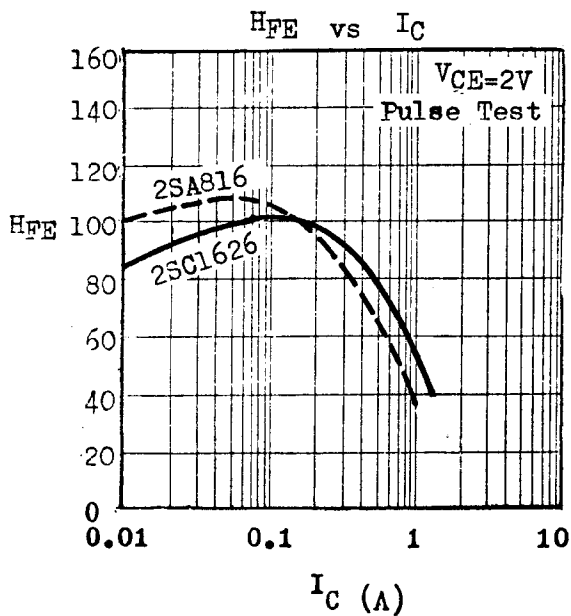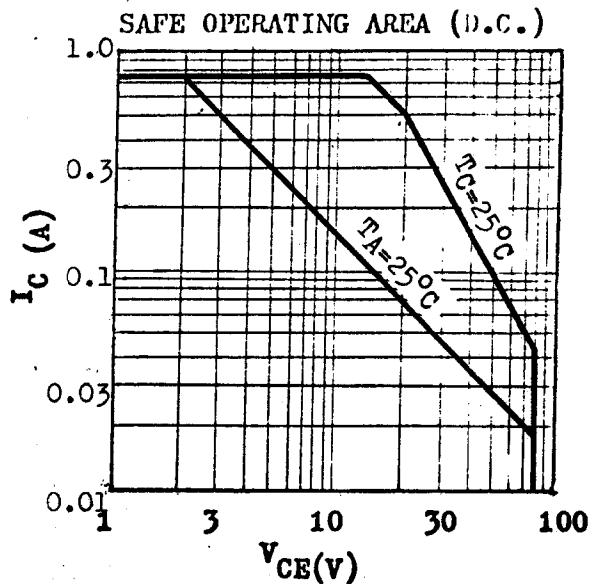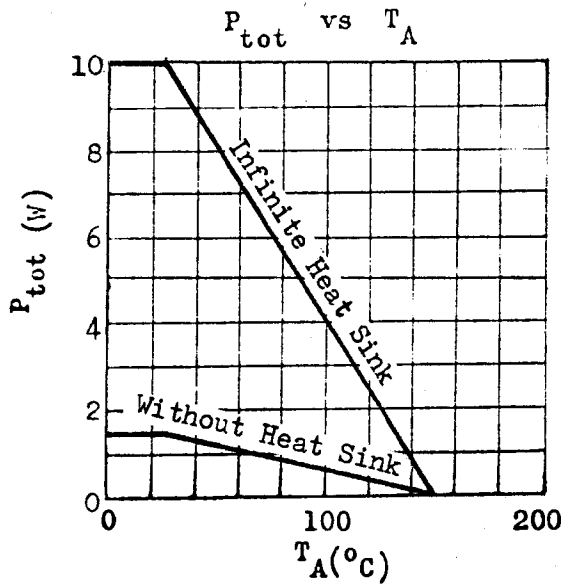



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.