


NPN SILICON PLANAR MEDIUM POWER DARLINGTON TRANSISTORS

BCX38A/B/C

ISSUE 1 – MARCH 94

FEATURES

- * 60 Volt V_{CE0}
- * Gain of 10K at $I_C=0.5$ Amp
- * $P_{tot}=1$ Watt



ABSOLUTE MAXIMUM RATINGS.


PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	80	V
Collector-Emitter Voltage	V_{CEO}	60	V
Emitter-Base Voltage	V_{EBO}	10	V
Peak Pulse Current	I_{CM}	2	A
Continuous Collector Current	I_C	800	mA
Power Dissipation at $T_{amb}=25^\circ\text{C}$	P_{tot}	1	W
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +200	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$).


PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	80			V	$I_C=10\mu\text{A}, I_E=0$
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	60			V	$I_C=10\text{mA}, I_B=0$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	10			V	$I_E=10\mu\text{A}, I_C=0$
Collector Cut-Off Current	I_{CBO}			100	nA	$V_{CB}=60\text{V}, I_E=0$
Emitter Cut-Off Current	I_{EBO}			100	nA	$V_{EB}=8\text{V}, I_C=0$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$			1.25	V	$I_C=800\text{mA}, I_B=8\text{mA}^*$
Base-Emitter Turn-on Voltage	$V_{BE(on)}$			1.8	V	$I_C=800\text{mA}, V_{CE}=5\text{V}^*$
Static Forward Current Transfer Ratio	BCX38A	h_{FE}	500 1000			$I_C=100\text{mA}, V_{CE}=5\text{V}^*$ $I_C=500\text{mA}, V_{CE}=5\text{V}^*$
	BCX38B		2000 4000			$I_C=100\text{mA}, V_{CE}=5\text{V}^*$ $I_C=500\text{mA}, V_{CE}=5\text{V}^*$
	BCX38C		5000 10000			$I_C=100\text{mA}, V_{CE}=5\text{V}^*$ $I_C=500\text{mA}, V_{CE}=5\text{V}^*$

BCX38A/B/C


TYPICAL CHARACTERISTICS

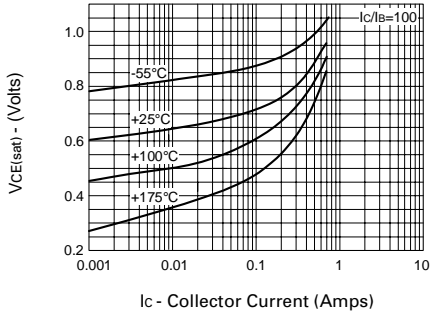


$V_{CE(sat)}$ v I_C

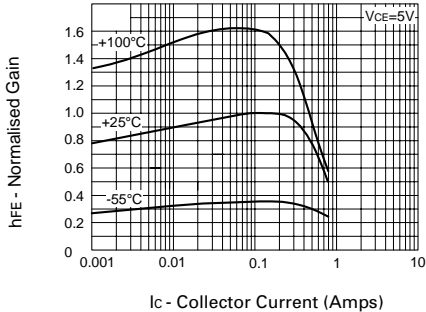


h_{FE} v I_C

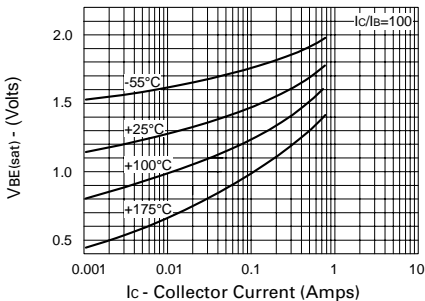


$V_{BE(sat)}$ v I_C

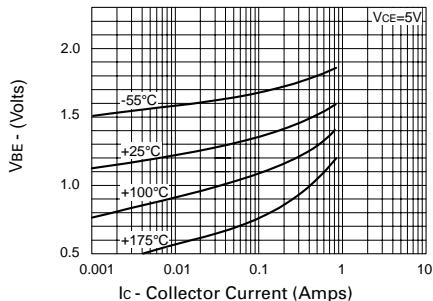

$V_{BE(on)}$ v I_C

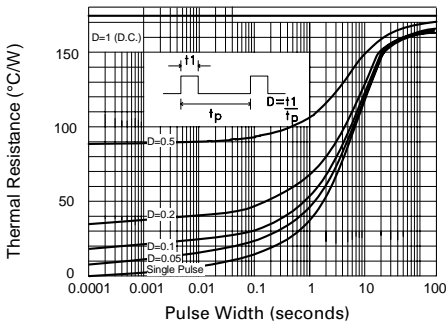


Maximum transient thermal impedance

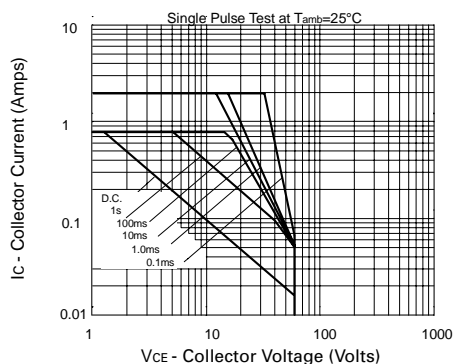

Safe Operating Area

BCX38A/B/C

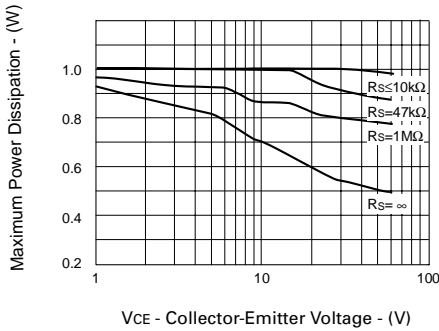

The maximum permissible operational temperature can be obtained using the equation:

$$T_{amb(max)} = \frac{Power(max) - Power(actual)}{0.0057} + 25^{\circ}C$$

$T_{amb(max)}$ = Maximum operating ambient temperature

Power (max) = Maximum power dissipation figure, for a given V_{CE} and source resistance (R_S)

Power (actual) = Actual power dissipation in users circuit



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.