


FEATURES

- Lower $R_{DS(ON)}$
- Improved inductive ruggedness
- Fast switching times
- Rugged polysilicon gate cell structure
- Lower input capacitance
- Extended safe operating area
- Improved high temperature reliability

TO-220



1. Gate 2. Drain 3. Source

PRODUCT SUMMARY

Part Number	V _{DS}	R _{DS(on)}	I _D
IRF720	400V	1.8Ω	3.3A
IRF721	350V	1.8Ω	3.3A

ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	IRF720	IRF721	Unit
Drain-Source Voltage (1)	V _{DSS}	400	350	V _{dc}
Drain-Gate Voltage (R _{GS} =1.0MΩ)(1)	V _{DGR}	400	350	V _{dc}
Gate-Source Voltage	V _{GS}	± 20		V _{dc}
Continuous Drain Current T _C =25 °C	I _D	3.3		A _{dc}
Continuous Drain Current T _C =100 °C	I _D	2.1		A _{dc}
Drain Current - Pulsed (3)	I _{DM}	13		A _{dc}
Gate Current - Pulsed	I _{GM}	± 1.5		A _{dc}
Single Pulsed Avalanche Energy (4)	E _{AS}	190		mJ
Avalanche Current	I _{AS}	3.3		A
Total Power Dissipation @ T _C =25 °C	P _D	50		Watts
Derate above 25 °C		0.40		W/°C
Operating and Storage Junction Temperature Range	T _J , T _{STG}	-55 to +150		°C
Maximum Lead Temp. for Soldering Purposes, 1/8" from case for 5 seconds	T _L	300		°C

Notes : (1) T_J=25°C to 150°C

(2) Pulse test : Pulse width ≤ 300μs, Duty Cycle ≤ 2%

(3) Repetitive rating : Pulse width limited by max. junction temperature

(4) L=31mH, V_{dd}=50V, R_G=25Ω, Starting T_J=25°C

ELECTRICAL CHARACTERISTICS (Tc=25°C unless otherwise specified)


Symbol	Characteristic	Min	Typ	Max	Units	Test Conditions
BV _{DSS}	Drain-Source Breakdown Voltage					
	IRF720	400	-	-	V	V _{GS} =0V, I _D =250μA
	IRF721	350	-	-	V	
V _{GS(th)}	Gate Threshold Voltage	2.0	-	4.0	V	V _{DS} =V _{GS} , I _D =250μA
I _{GSS}	Gate-Source Leakage Forward	-	-	100	nA	V _{GS} =20V
I _{GSS}	Gate-Source Leakage Reverse	-	-	-100	nA	V _{GS} =-20V
I _{DSS}	Zero Gate Voltage Drain Current	-	-	250	μA	V _{DS} =Max. Rating, V _{GS} =0V
		-	-	1000	μA	V _{DS} =0.8 Max. Rating, V _{GS} =0V, Tc=125°C
R _{DS(on)}	Static Drain-Source On Resistance(2)	-	1.4	1.8	Ω	V _{GS} =10V, I _D =1.7A
g _{fs}	Forward Transconductance (2)	1.0	2.2	-	∩	V _{DS} ≥50V, I _D =1.7A
C _{iss}	Input Capacitance	-	400	-	pF	V _{GS} =0V, V _{DS} =25V, f=1.0MHz
C _{oss}	Output Capacitance	-	59.3	-	pF	
C _{rss}	Reverse Transfer Capacitance	-	27	-	pF	
t _{d(on)}	Turn-On Delay Time	-	10	15	ns	V _{DD} =0.5 BV _{DSS} , I _D =3.3A, Z _θ =18Ω (MOSFET switching times are essentially independent of operating temperature)
t _r	Rise Time	-	14	20	ns	
t _{d(off)}	Turn-Off Delay Time	-	30	45	ns	
t _f	Fall Time	-	13	20	ns	
Q _g	Total Gate Charge (Gate-Source Plus Gate-Drain)	-	-	25	nC	V _{GS} =10V, I _D =3.3A, V _{DS} =0.8 Max. Rating (Gate charge is essentially independent of operating temperature)
Q _{gs}	Gate-Source Charge	-	3.0	-	nC	
Q _{gd}	Gate-Drain ("Miller") Charge	-	11	-	nC	

THERMAL RESISTANCE





Symbol	Characteristics		All	Units	Remark
R _{thJC}	Junction-to-Case	MAX	2.5	K/W	
R _{thCS}	Case-to-Sink	TYP	0.5	K/W	Mounting surface flat, smooth, and greased
R _{thJA}	Junction-to-Ambient	MAX	62.5	K/W	Free Air Operation






- Notes : (1) T_J=25°C to 150°C
 (2) Pulse test : Pulse width ≤ 300μs, Duty Cycle ≤ 2%
 (3) Repetitive rating : Pulse width limited by max. junction temperature






SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS

Symbol	Characteristic	Min	Typ	Max	Units	Test Conditions
I_S	Continuous Source Current (Body Diode)	-	-	3.3	A	Modified MOSFET symbol showing the integral reverse P-N junction rectifier 
I_{SM}	Pulse Source Current (Body Diode) (3)	-	-	13	A	
V_{SD}	Diode Forward Voltage (2)	-	-	1.8	V	$T_J=25^\circ\text{C}$, $I_S=3.3\text{A}$, $V_{GS}=0\text{V}$
t_{rr}	Reverse Recovery Time	-	270	-	ns	$T_J=25^\circ\text{C}$, $I_F=3.3\text{A}$, $dI_F/dt=100\text{A}/\mu\text{S}$

- Notes : (1) $T_J=25^\circ\text{C}$ to 150°C
 (2) Pulse test : Pulse width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$
 (3) Repetitive rating : Pulse width limited by max. junction temperature

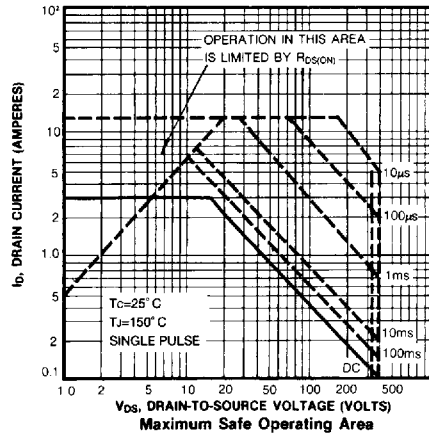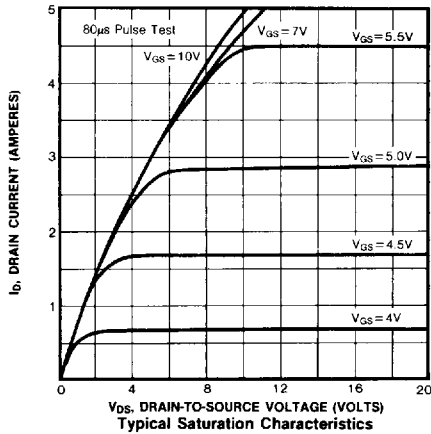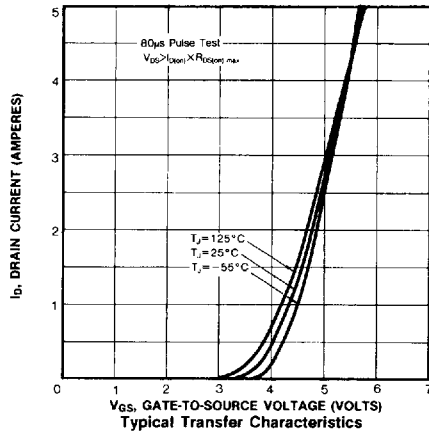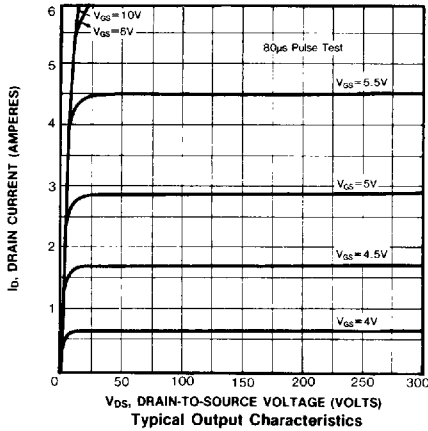

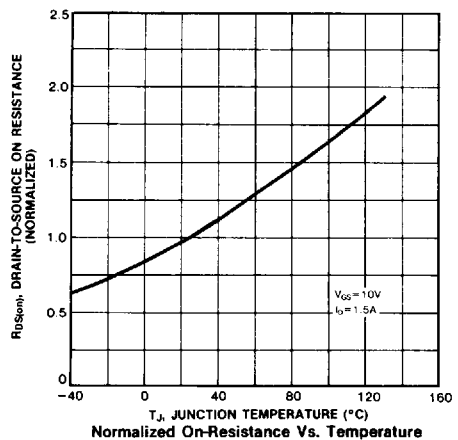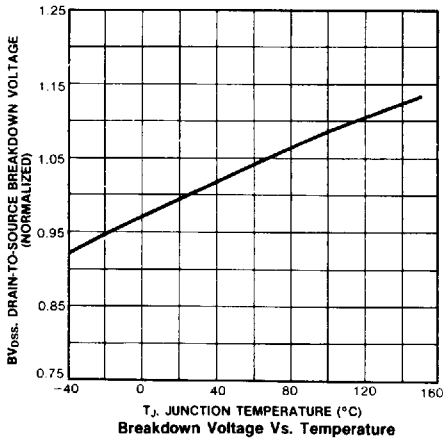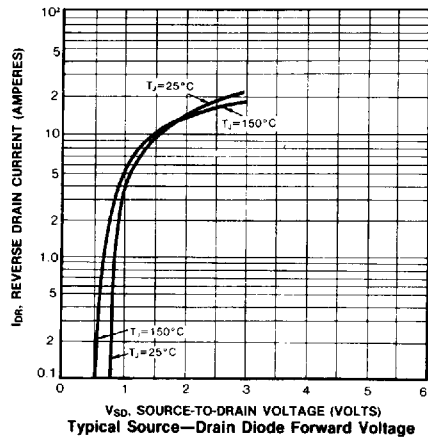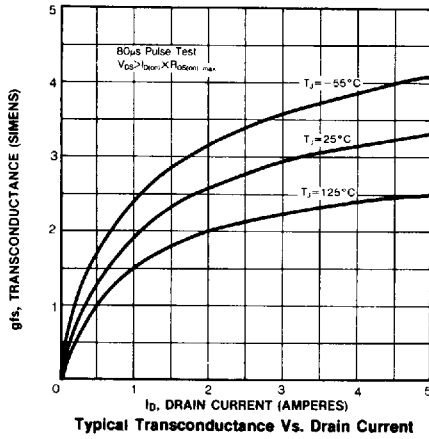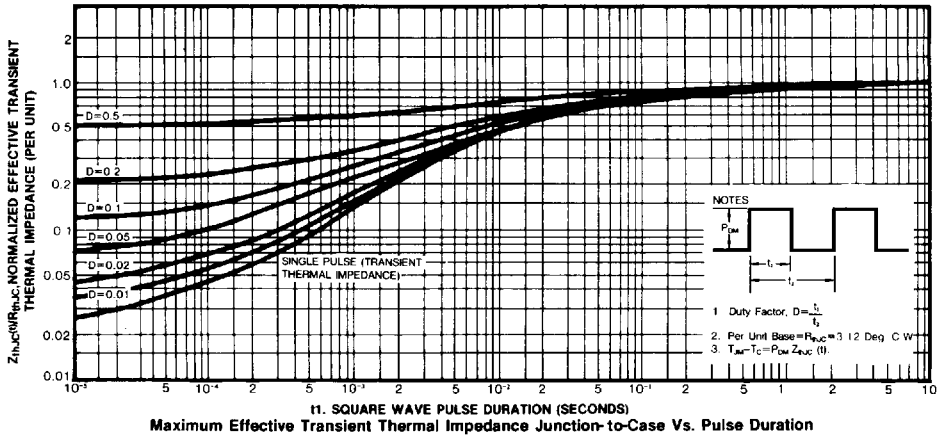

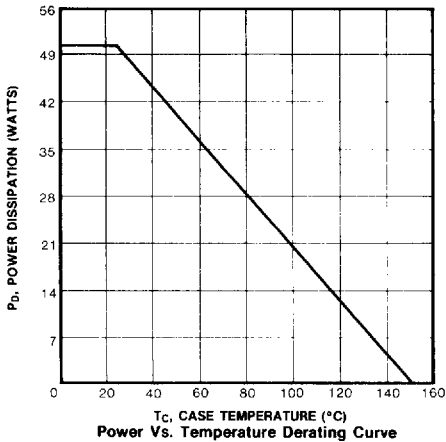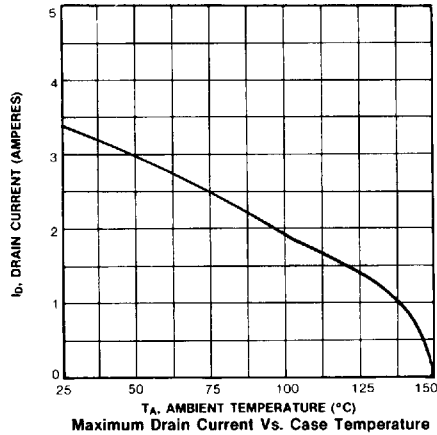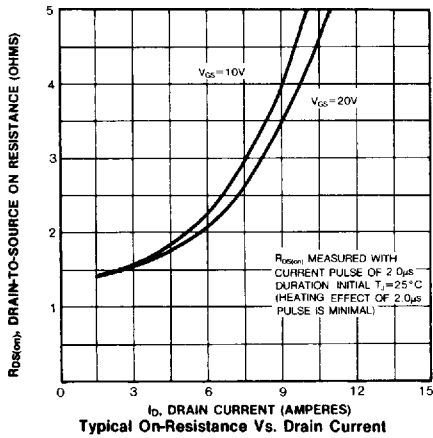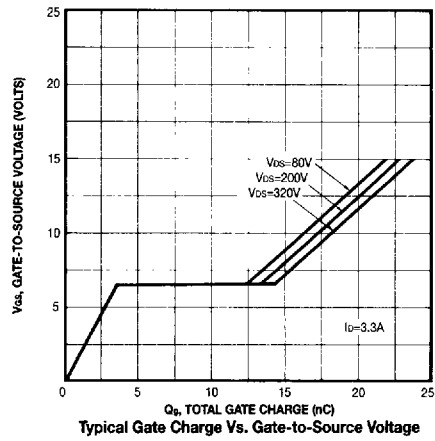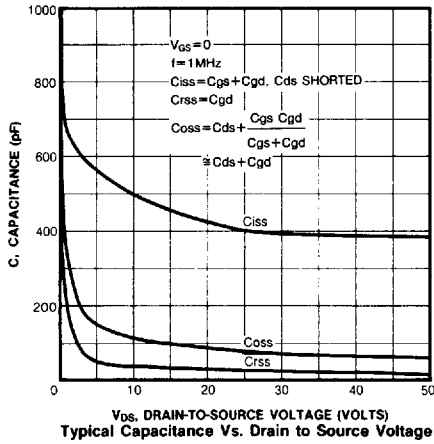

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.