


Rectifier Diode Avalanche Diode

$V_{RRM} = 800-1800 \text{ V}$
 $I_{F(RMS)} = 40 \text{ A}$
 $I_{F(AV)M} = 25 \text{ A}$

V_{RSM} V	$V_{(BR)min}$ ① V	V_{RRM} V	Anode on stud	Cathode on stud
900	-	800	DS 17-08A	DSI 17-08A
1300	-	1200	DS 17-12A	DSI 17-12A
1300	1300	1200	DSA 17-12A	DSAI 17-12A
1700	1750	1600	DSA 17-16A	DSAI 17-16A
1900	1950	1800	DSA 17-18A	DSAI 17-18A

① Only for Avalanche Diodes

DO-203 AA

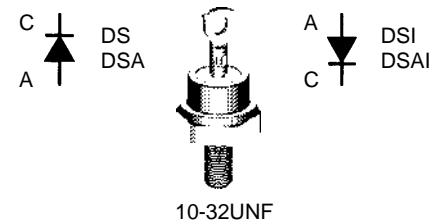

A = Anode C = Cathode

Symbol	Test Conditions	Maximum Ratings	
$I_{F(RMS)}$	$T_{VJ} = T_{VJM}$	40	A
$I_{F(AV)M}$	$T_{case} = 125^{\circ}\text{C}; 180^{\circ}$ sine	25	A
P_{RSM}	DSA(I) types, $T_{VJ} = T_{VJM}, t_p = 10 \mu\text{s}$	7	kW
I_{FSM}	$T_{VJ} = 45^{\circ}\text{C}; V_R = 0$	t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine	370 A 400 A
	$T_{VJ} = T_{VJM}; V_R = 0$	t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine	300 A 320 A
I^2t	$T_{VJ} = 45^{\circ}\text{C}; V_R = 0$	t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine	680 A ² s 660 A ² s
	$T_{VJ} = T_{VJM}; V_R = 0$	t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine	450 A ² s 430 A ² s
T_{VJ}		-40...+180	°C
T_{VJM}		180	°C
T_{stg}		-40...+180	°C
M_d	Mounting torque	2.2-2.8	Nm
		19-25	lb.in.
Weight		6	g

Features

- International standard package, JEDEC DO-203 AA (DO-4)
- Planar glassivated chips


Applications

- Supplies for DC power equipment
- DC supply for PWM inverter
- Field supply for DC motors
- Battery DC power supplies

Advantages

- Space and weight savings
- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits

Dimensions in mm (1 mm = 0.0394")

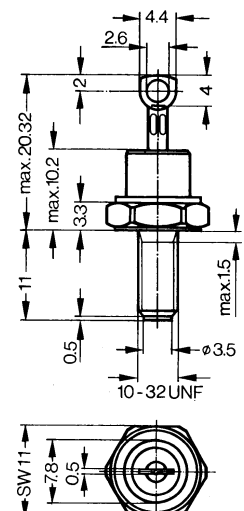

Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions

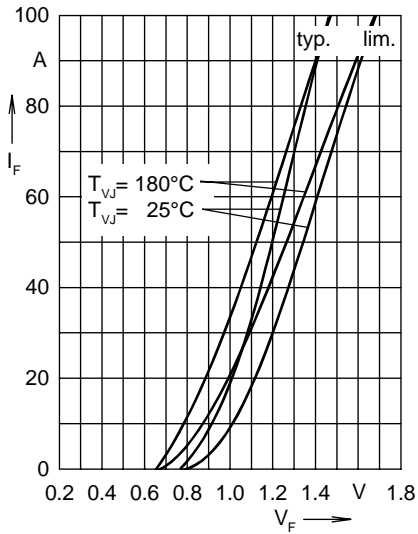


Fig. 1 Forward characteristics

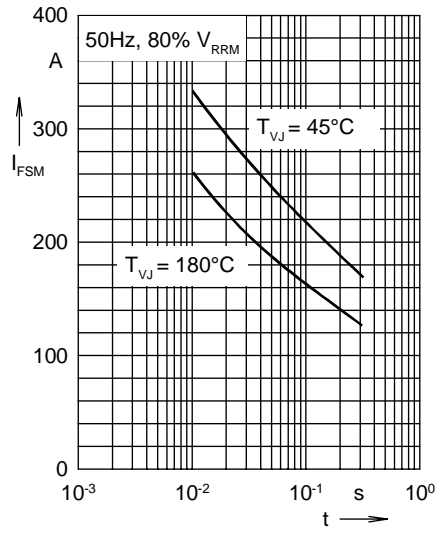


Fig. 2 Surge overload current
 I_{FSM} : crest value, t : duration

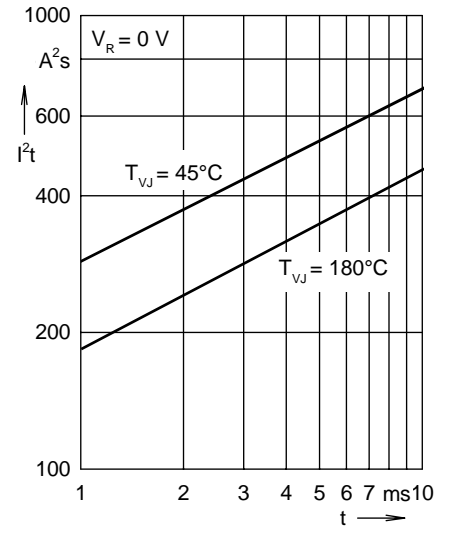


Fig. 3 I^2t versus time (1-10 ms)

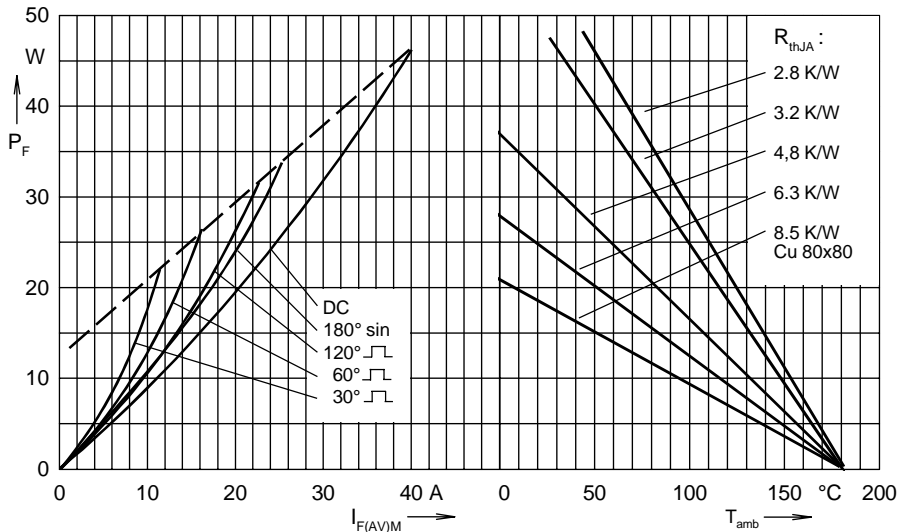


Fig. 4 Power dissipation versus forward current and ambient temperature

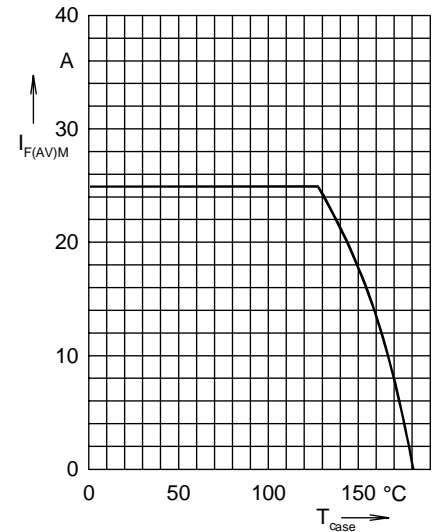


Fig. 5 Max. forward current at case temperature 180° sine

R_{thJH} for various conduction angles d:

d	R_{thJH} (K/W)
DC	2.10
180°	2.23
120°	2.33
60°	2.53
30°	2.72

Constants for Z_{thJH} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.1006	0.0021
2	0.5311	0.0881
3	0.8683	2.968
4	0.600	3.20

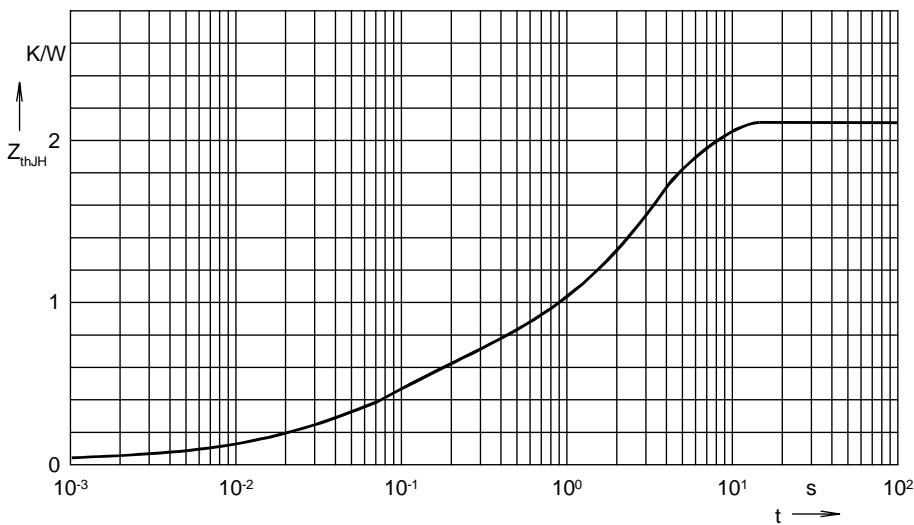


Fig. 6 Transient thermal impedance junction to heatsink



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.