



P-Channel 200-V (D-S) MOSFETs

PRODUCT SUMMARY				
Part Number	$V_{(BR)DSS}$ Min (V)	$r_{DS(on)}$ Max (Ω)	$V_{GS(th)}$ (V)	I_D (A)
VP2020L	-200	20 @ $V_{GS} = -4.5$ V	-0.8 to -2.5	-0.12
BSS92	-200	20 @ $V_{GS} = -10$ V	-0.8 to -2.8	-0.15

FEATURES

- High-Side Switching
- Secondary Breakdown Free: -220 V
- Low On-Resistance: 11.5 Ω
- Low-Power/Voltage Driven
- Excellent Thermal Stability


BENEFITS

- Ease in Driving Switches
- Full-Voltage Operation
- Low Offset Voltage
- Easily Driven Without Buffer
- No High-Temperature "Run-Away"

APPLICATIONS

- Drivers: Relays, Solenoids, Lamps, Hammers, Displays, Memories, Transistors, etc.
- Power Supply, Converters
- Motor Control
- Switches

TO-226AA
(TO-92)




Top View
VP2020L

Device Marking
Front View



"S" = Siliconix Logo
xxxy = Date Code

TO-92-18CD
(TO-18 Lead Form)



Top View
BSS92

Device Marking
Front View



"S" = Siliconix Logo
xxxy = Date Code

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)				
Parameter	Symbol	VP2020L	BSS92	Unit
Drain-Source Voltage	V_{DS}	-200	-200	V
Gate-Source Voltage	V_{GS}	± 20	± 20	
Continuous Drain Current ($T_J = 150^\circ\text{C}$)	I_D	$T_A = 25^\circ\text{C}$	-0.12	A
		$T_A = 100^\circ\text{C}$	-0.08	
Pulsed Drain Current ^a	I_{DM}	-0.48	-0.6	
Power Dissipation	P_D	$T_A = 25^\circ\text{C}$	0.8	W
		$T_A = 100^\circ\text{C}$	0.32	
Thermal Resistance, Junction-to-Ambient	R_{thJA}	156	125	$^\circ\text{C}/\text{W}$
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 150		$^\circ\text{C}$

Notes

a. Pulse width limited by maximum junction temperature.



SPECIFICATIONS (T _A = 25 °C UNLESS OTHERWISE NOTED)								
Parameter	Symbol	Test Conditions	Typ ^a	Limits				Unit
				VP2020L		BSS92		
				Min	Max	Min	Max	
Static								
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = -10 μA		-220				V
		V _{GS} = 0 V, I _D = -250 μA	-220			-200		
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -1 mA	-1.9	-0.8	-2.5	-0.8	-2.8	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			±10		±100	nA
		T _J = 125 °C			±50			
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 0.8 × V _{(BR)DSS} , V _{GS} = 0 V			-1			μA
		T _J = 125 °C			-100			
		V _{DS} = -200 V, V _{GS} = 0 V					-60	
		T _J = 125 °C					-200	
		V _{DS} = -60 V, V _{GS} = 0 V					-0.2	
On-State Drain Current ^b	I _{D(on)}	V _{DS} = -10 V, V _{GS} = -4.5 V	-250	-100				mA
Drain-Source On-Resistance ^b	r _{DS(on)}	V _{GS} = -10 V, I _D = -0.1 A	11.5				20	Ω
		V _{GS} = -4.5 V, I _D = -0.1 A	15		20			
		T _J = 125 °C	28		40			
		V _{GS} = -4.5 V, I _D = -0.05 A	15					
		T _J = 125 °C	28					
Forward Transconductance ^b	g _{fs}	V _{DS} = -10 V, I _D = -0.1 A	170	100				mS
		V _{DS} = -25 V, I _D = -0.1 A	170			60		
Diode Forward Voltage	V _{SD}	I _S = -0.3 A, V _{GS} = 0 V	-0.9				-1.2	V
Dynamic								
Input Capacitance	C _{iSS}	V _{DS} = -25 V, V _{GS} = 0 V f = 1 MHz	30		70		130	pF
Output Capacitance	C _{oss}		10		20		30	
Reverse Transfer Capacitance	C _{rSS}		3		10		15	
Switching^c								
Turn-On Time	t _{d(on)}	V _{DD} = -25 V, R _L = 250 Ω I _D ≅ -0.1 A, V _{GEN} = -10 V R _G = 25 Ω	6		10			ns
	t _r		8		15			
Turn-Off Time	t _{d(off)}		18		30			
	t _f		17		25			







Notes

- a. For DESIGN AID ONLY, not subject to production testing.
- b. Pulse test: PW ≤ 300 μs duty cycle ≤ 2%.
- c. Switching time is essentially independent of operating temperature.






VPDQ20



TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

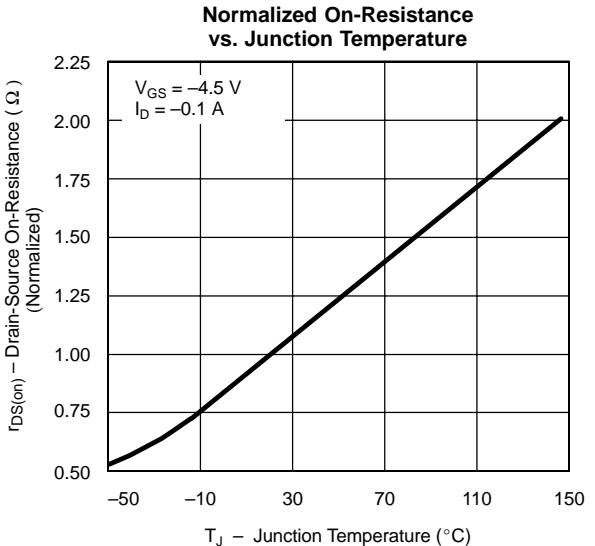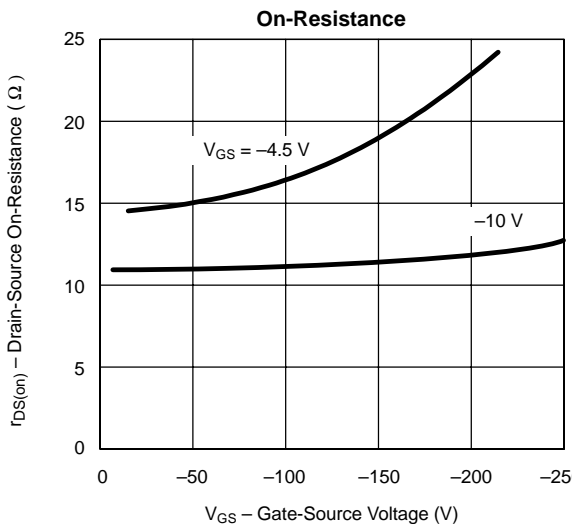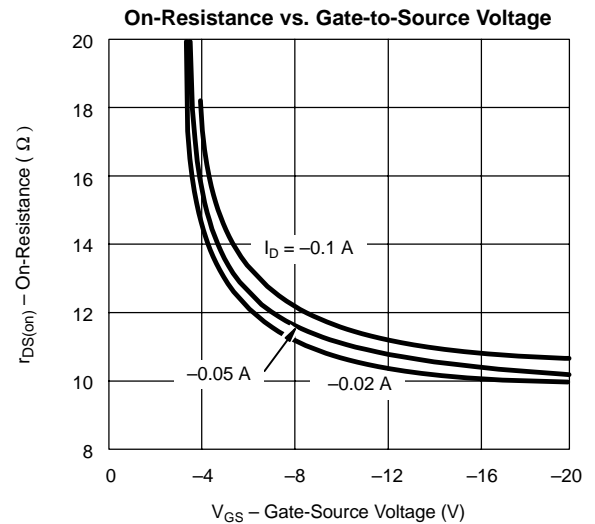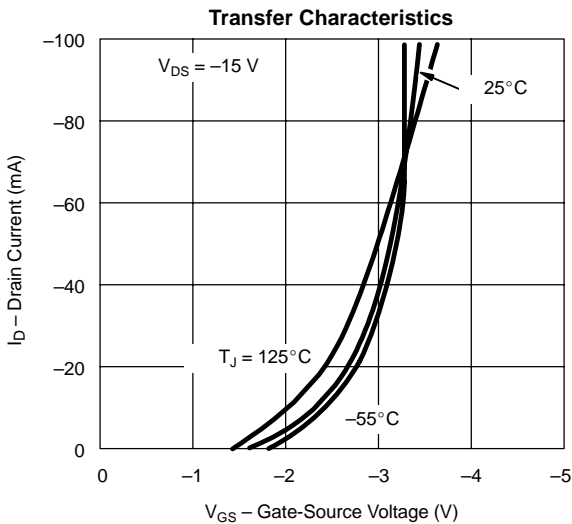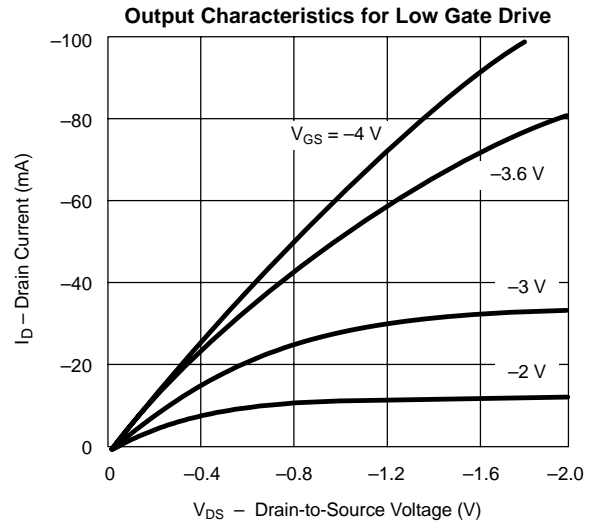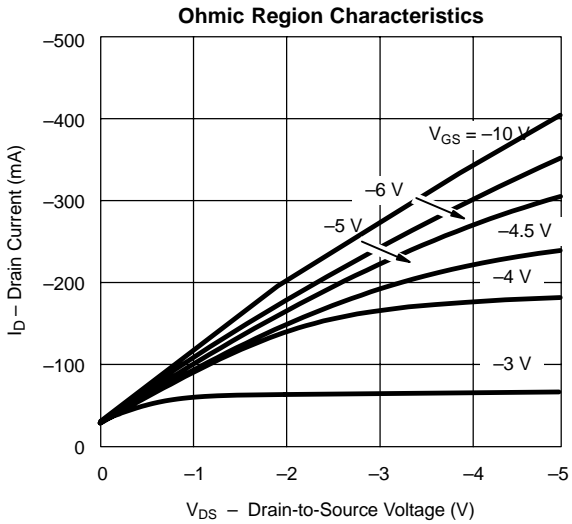

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

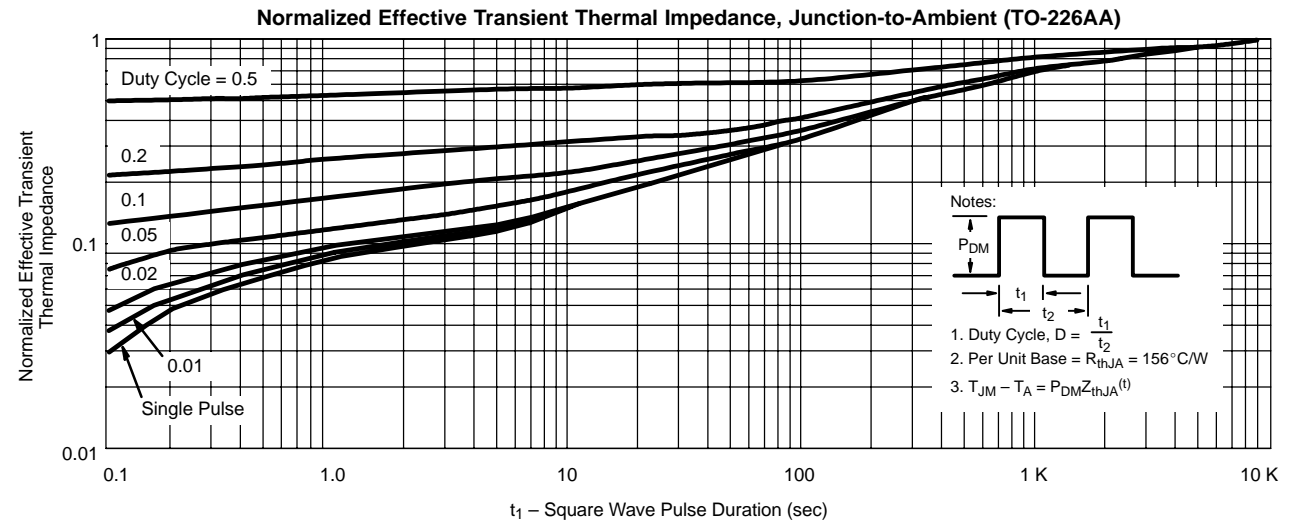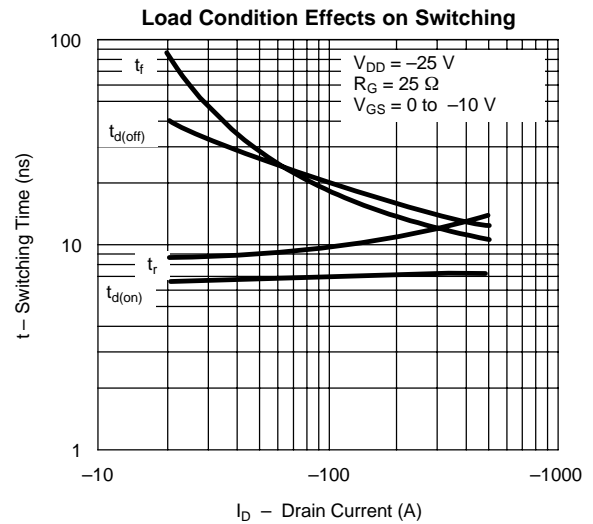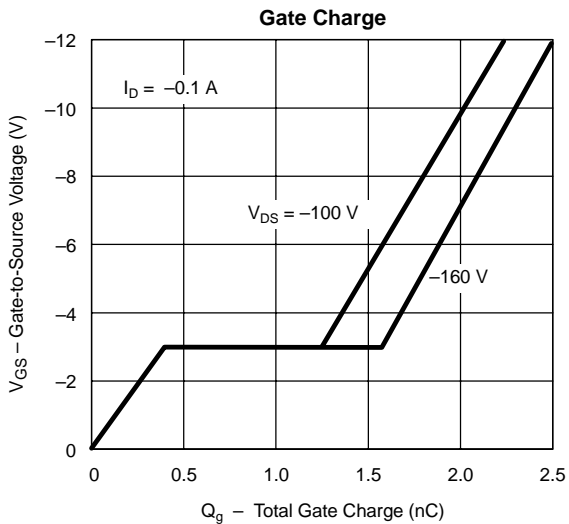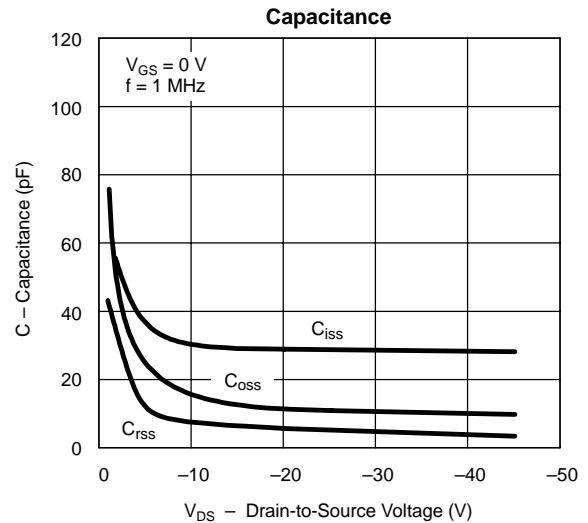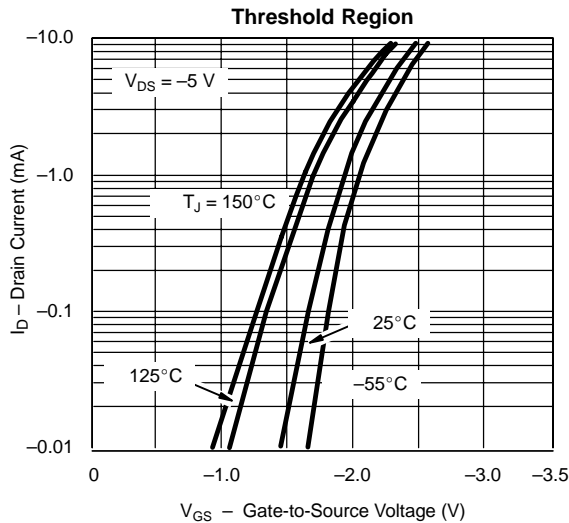



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.