
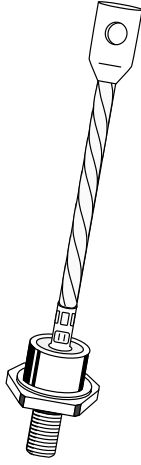
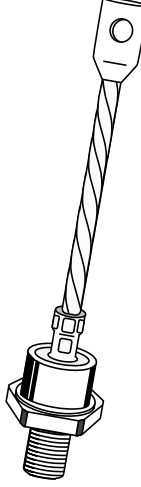


Rectifiers, General Purpose

(Continued)

I_O (AMPS)	60	80	150	250
@ T_C (°C)	150	150	150	150
I_{FSM} (AMPS)	900	1500	3000	5000
CASE	 DO-5*		 DO-8*	 DO-9*
V_{RRM} (VOLTS)				
100	CR60-010	CR80-010	CR150-010	CR250-010
200	CR60-020	CR80-020	CR150-020	CR250-020
400	CR60-040	CR80-040	CR150-040	CR250-040
600	CR60-060	CR80-060	CR150-060	CR250-060
800	CR60-080	CR80-080	CR150-080	CR250-080
1000	CR60-100	CR80-100	CR150-100	CR250-100
1200	CR60-120	CR80-120	CR150-120	CR250-120

V_F MAX @ $I_F = I_O$	1.1V	1.2V	1.1V	1.1V
-------------------------	------	------	------	------

I_R MAX @ V_{RRM}	100 μ A	100 μ A	1.0mA	2.0mA
-----------------------	-------------	-------------	-------	-------

* Standard polarity is cathode to case. For reverse polarity add "R" suffix to part number.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.