


LOW NOISE APPLICATION.

FEATURE

- For Complementary with NPN Type BC549/550.

MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	BC559	-30	V
	BC560	-50	
Collector-Emitter Voltage	BC559	-30	V
	BC560	-45	
Emitter-Base Voltage	V _{EBO}	-5	V
Collector Current	I _C	-100	mA
Collector Power Dissipation	P _C	625	mW
Junction Temperature	T _j	150	°C
Storage Temperature Range	T _{stg}	-55 ~ 150	°C

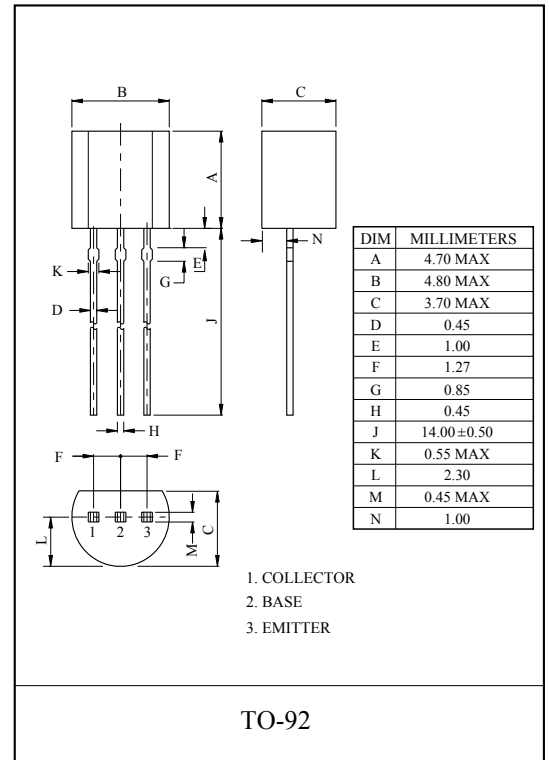

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector-Emitter Breakdown Voltage	BC559	I _C =-10mA, I _B =0	-30	-	-	V
	BC560		-45	-	-	
Collector-Base Breakdown Voltage	BC559	I _C =-10μA, I _E =0	-30	-	-	V
	BC560		-50	-	-	
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	I _E =-10μA, I _C =0	-5.0	-	-	V
Collector Cut-off Current	I _{CB0}	V _{CB} =-30V, I _E =0	-	-	-15	nA
DC Current Gain	h _{FE}	I _C =-2mA, V _{CE} =-5V	110	-	800	
Base-Emitter Voltage	V _{BE(ON)}	I _C =-2mA, V _{CE} =-5V	-0.55	-	-0.7	V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C =-100mA, I _B =-5mA	-	-	-0.6	V
Base-Emitter Saturation Voltage	V _{BE(sat)}	I _C =-100mA, I _B =-5mA	-	-0.9	-	V
Transition Frequency	f _T	I _C =-10mA, V _{CE} =-5V, f=100MHz	-	300	-	MHz
Collector Output Capacitance	C _{ob}	V _{CB} =-10V, I _E =0, f=1MHz	-	-	7.0	pF
Noise Figure	NF	I _C =-200μA, V _{CE} =-5V R _g =10kΩ, f=1kHz	-	-	4.0	dB

Note : h_{FE} Classification A:110~220, B:200~450, C:420~800



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.