


POW-R-BLOK™ Dual & Single Diode Isolated Module 160 Amperes / Up to 1600 Volts

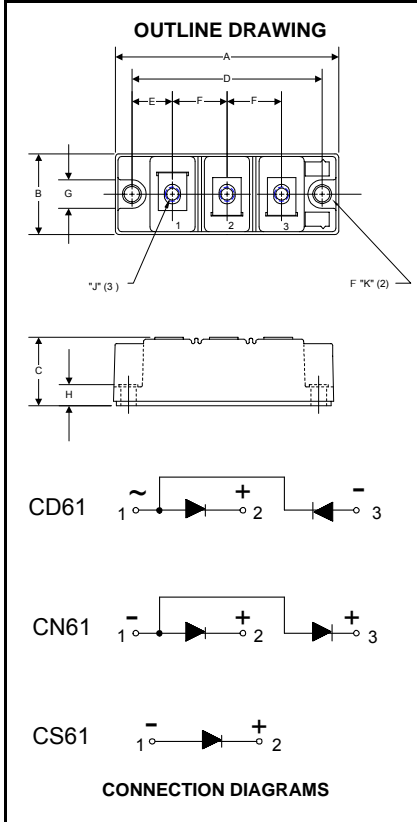

**CD61__16A, CS61__16A
CN61__16A, CC61__16A
Dual & Single Diode Isolated
POW-R-BLOK™ Module
160 Amperes / Up to 1600 Volts**

Description:

Powerex Dual Diode & Single Diode Modules are designed for use in applications requiring rectification and isolated packaging. The modules are isolated for easy mounting with other components on a common heatsink. POW-R-BLOK™ has been tested and recognized by the Underwriters Laboratories.

Features:

- Electrically Isolated Heatsinking
- DBC Alumina Insulator
- Glass Passivated Chips
- Metal Baseplate
- Low Thermal Impedance for Improved Current Capability
- UL Recognized (E78240)

Benefits:

- No Additional Insulation Components Required
- Easy Installation
- No Clamping Components Required
- Reduce Engineering Time

Applications:

- Power Supplies
- Bridge Circuits
- AC & DC Motor Drives
- Battery Supplies
- Large IGBT Circuit Front Ends
- Welders

Ordering Information:

Select the complete nine digit module part number from the table below. Example: CD611616A is a 1600 Volt, 160 Ampere Dual Diode Isolated POW-R-BLOK™ Module

Type	Voltage Volts (x100)	Current Amperes (x10)
CD61	08	16
CN61	12	
CC61	14	
CS61	16	

Outline Dimensions

Dimension	Inches	Millimeters
A	3.70	94
B	1.38	35
C	1.18	30
D	3.15	80
E	0.67	17
F	0.91	23
G	0.57	14.5
H	0.35	9
J	M6	M6
K	0.26	6.5

Note: Dimensions are for reference only.



CD61__16A, CS61__16A
CN61__16A, CC61__16A

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual & Single Diode Isolated Module
160 Amperes / Up to 1600 Volts

Absolute Maximum Ratings

Characteristics	Conditions	Symbol		Units
Repetitive Peak Reverse Blocking Voltage		V_{RRM}	up to 1600	V
Non-Repetitive Peak Reverse Blocking Voltage (t < 5 msec)		V_{RSM}	$V_{RRM} + 100$	V
RMS Forward Current	180° Conduction, $T_C=100^\circ\text{C}$	$I_{F(RMS)}$	260	A
Average Forward Current	180° Conduction, $T_C=100^\circ\text{C}$	$I_{F(AV)}$	165	A
Peak One Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J=150\text{C}$	I_{FSM}	3,500	A
	60 Hz, 100% No V_{RRM} reapplied, $T_J=150\text{C}$	I_{FSM}	4,200	A
	50 Hz, 100% V_{RRM} reapplied, $T_J=150\text{C}$	I_{FSM}	3,350	A
	50 Hz, 100% No V_{RRM} reapplied, $T_J=150\text{C}$	I_{FSM}	4,000	A
Peak Three Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J=150\text{C}$	I_{FSM}	2,600	A
	50 Hz, 100% V_{RRM} reapplied, $T_J=150\text{C}$	I_{FSM}	2,480	A
Peak Ten Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J=150\text{C}$	I_{FSM}	1,750	A
	50 Hz, 100% V_{RRM} reapplied, $T_J=150\text{C}$	I_{FSM}	1,820	A
I^2t for Fusing for One Cycle	8.3ms, 100% V_{RRM} reapplied, $T_J=150\text{C}$	I^2t	52,000	$\text{A}^2 \text{ sec}$
	8.3ms, 100% No V_{RRM} reapplied, $T_J=150\text{C}$	I^2t	73,000	$\text{A}^2 \text{ sec}$
	10ms, 100% V_{RRM} reapplied, $T_J=150\text{C}$	I^2t	56,000	$\text{A}^2 \text{ sec}$
	10ms, 100% No V_{RRM} reapplied, $T_J=150\text{C}$	I^2t	80,000	$\text{A}^2 \text{ sec}$
Operating Temperature		T_J	-40 to +150	$^\circ\text{C}$
Storage Temperature		T_{stg}	-40 to +150	$^\circ\text{C}$
Max. Mounting Torque, M6 Mounting Screw			35 - 50	in.-Lb.
			4 - 6	Nm
Max. Mounting Torque, M8 Terminal Screw			35 - 50	in.-Lb.
			4 - 6	Nm
Module Weight, Typical			200	g
			7.1	lb.
V Isolation @ 25C, V_{rms} for 1 sec		V_{rms}	3500	V


Electrical Characteristics, T_J=25°C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Max.	Units
Repetitive Peak Reverse Leakage Current	I _{RRM}	Up to 1600V, T _J =150°C		20	mA
Peak On-State Voltage	V _{FM}	I _{FM} =520A, 180 Deg Conduction		1.43	V
Threshold Voltage, Low-level	V _{(TO)1}	T _J = 150°C, I = 16.7% I _{F(AV)} to I _{F(AV)}		0.73	V
Slope Resistance, Low-level	r _{T1}			1.5	mΩ
Threshold Voltage, High-level	V _{(TO)2}	T _J = 150°C, I = I _{F(AV)} to I _{FSM}		0.88	V
Slope Resistance, High-level	r _{T2}			1.26	mΩ
V _{TM} Coefficients, Full Range		T _J = 150°C, I = 15% I _{F(AV)} to I _{FSM}	A =	0.563	
			B =	0.0392	
		V _{FM} = A + B Ln I + C I + D Sqrt I	C =	1.31 E-3	
			D =	-8.25 E-5	


Thermal Characteristics

Characteristics	Symbol		Max.	Units
Thermal Resistance, Junction to Case	R _{ΘJ-C}	Per Module, both conducting	0.1	°C/W
		Per Junction both conducting	0.2	°C/W
Thermal Impedance Coefficients	Z _{ΘJ-C}	$Z_{\Theta J-C} = K_1 (1 - \exp(-t/\tau_1))$ + $K_2 (1 - \exp(-t/\tau_2))$ + $K_3 (1 - \exp(-t/\tau_3))$ + $K_4 (1 - \exp(-t/\tau_4))$	K ₁ = 1.84E-2 K ₂ = 4.68E-2 K ₃ = 8.25E-2 K ₄ = 5.23E-2	τ ₁ = 2.53E-6 τ ₂ = 6.44E-2 τ ₃ = 3.11E-1 τ ₄ = 1.32
Thermal Resistance, Case to Sink Lubricated	R _{ΘC-S}	Per Module	0.05	°C/W


Maximum On-State Forward Voltage Drop
($T_J = 150^\circ\text{C}$)

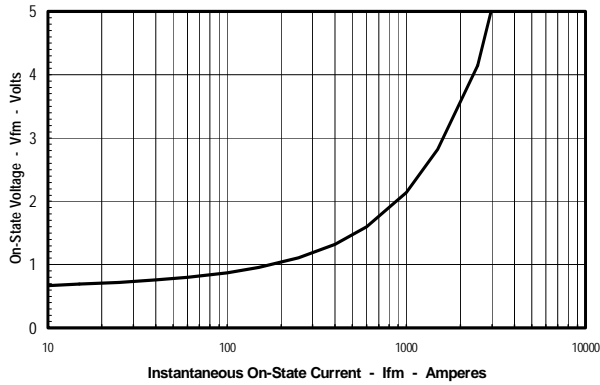


Maximum Transient Thermal Impedance
(Junction to Case, Per Diode)

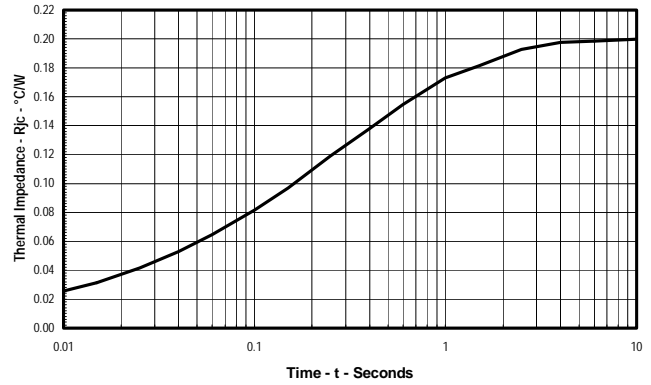


Maximum On-State Power Dissipation
(Sinusoidal Waveform)

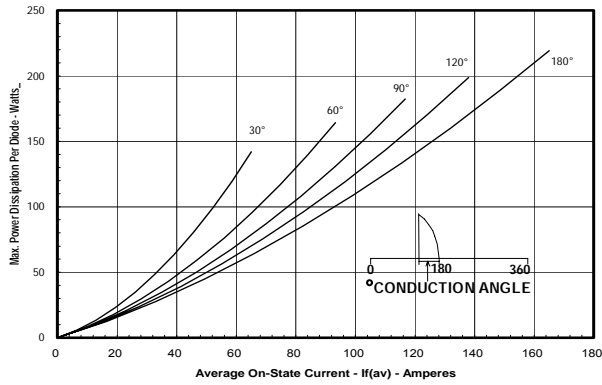


Maximum Allowable Case Temperature
(Sinusoidal Waveform)


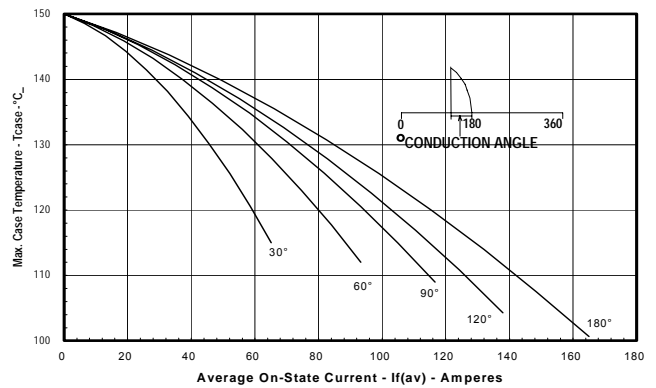


Maximum On-State Power Dissipation
(Rectangular Waveform)

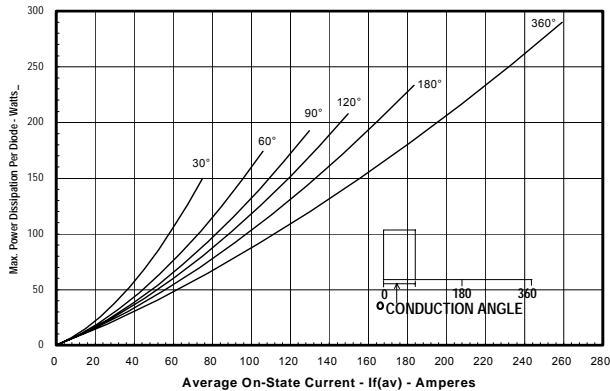

Maximum Allowable Case Temperature
(Rectangular Waveform)

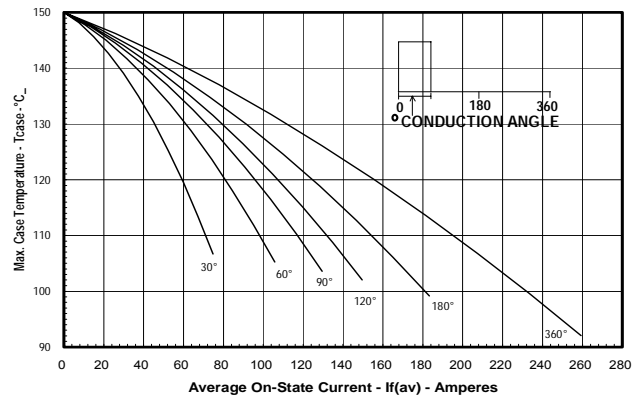

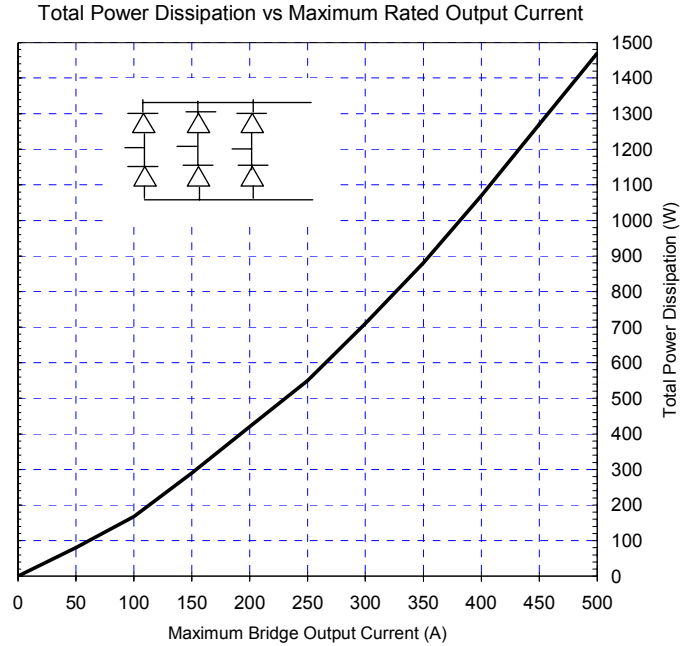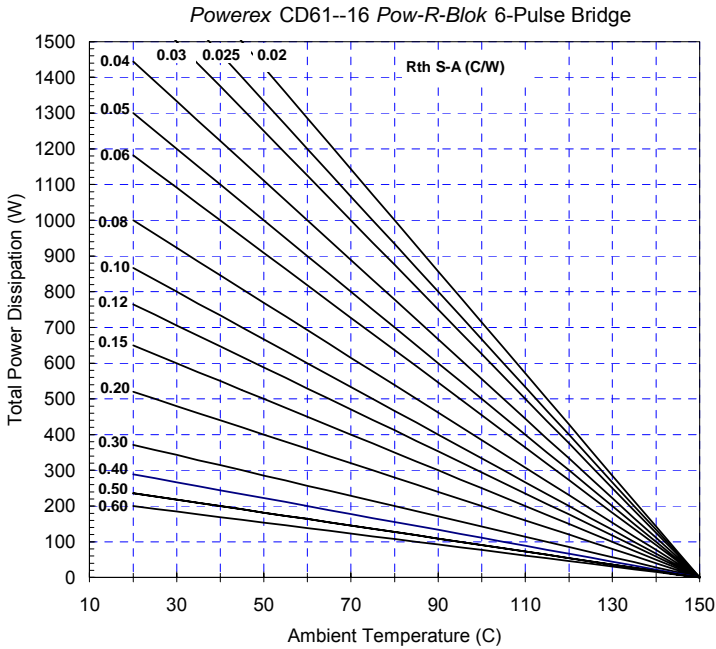

Six-Pulse Bridge Circuit Total Power Dissipation & Maximum Rated Output Current With Sink to Ambient Resistance of Heatsink as a Parameter.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.