

CentralTM Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

2N681,A THRU 2N692,A

SILICON CONTROLLED RECTIFIER
25 AMPS, 25 THRU 800 VOLTS

JEDEC TO-48 CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR 2N681,A Series types are Silicon Controlled Rectifiers designed for phase control applications.

MAXIMUM RATINGS ($T_C=25^\circ\text{C}$ unless otherwise noted)


	2N681,A	2N682,A	2N683,A	2N684,A	2N685,A	2N686,A	2N687,A	2N688,A	2N689,A	2N690,A	2N691,A	2N692,A	UNITS
V_{DRM}	25	50	100	150	200	250	300	400	500	600	700	800	V
V_{RRM}	25	50	100	150	200	250	300	400	500	600	700	800	V
V_{RSM}	25	50	100	150	200	250	300	400	500	600	700	800	V
RMS On-State Current ($T_C=70^\circ\text{C}$)							$I_T(\text{RMS})$	25					A
Peak One Cycle Surge Current (60Hz)							I_{TSM}	200					A
Peak Gate Power Dissipation							P_{GM}	5.0					W
Average Gate Power Dissipation							$P_{G(AV)}$	0.5					W
Storage Temperature							T_{stg}	-65 to +150					$^\circ\text{C}$
Operating Junction Temperature							T_J	-65 to +125					$^\circ\text{C}$
Thermal Resistance, Junction to Case							θ_{JC}	1.5					$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, T_C=125^\circ\text{C}$ (2N681,A, 2N682,A, 2N683, 2N684,A)			13	mA
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, T_C=125^\circ\text{C}$ (2N685,A)			12	mA
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, T_C=125^\circ\text{C}$ (2N686,A)			11	mA
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, T_C=125^\circ\text{C}$ (2N687,A)			10	mA
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, T_C=125^\circ\text{C}$ (2N688,A)			8.0	mA
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, T_C=125^\circ\text{C}$ (2N689,A)			6.0	mA
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, T_C=125^\circ\text{C}$ (2N690,A)			5.0	mA
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, T_C=125^\circ\text{C}$ (2N691,A)			4.5	mA
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, T_C=125^\circ\text{C}$ (2N692,A)			4.0	mA
I_{GT}	$V_D=12\text{V}, R_L=50\Omega$			40	mA
V_{GT}	$V_D=12\text{V}, R_L=50\Omega$			2.0	V
V_{TM}	$I_{TM}=50\text{A}, \text{PW}=1.0\text{ms}, \text{D.C}=2.0\%$			2.0	V
I_H	$V_D=7.0\text{V}, R_{GK}=1\text{K}\Omega$ (2N681 thru 2N692)			100	mA
I_H	$V_D=7.0\text{V}, R_{GK}=1\text{K}\Omega$ (2N681A thru 2N692A)			50	mA
dv/dt	Rated $V_{DRM}, T_C=125^\circ\text{C}$		100		V/ μs
t_{on}	$I_F=10\text{A}, I_G=200\text{mA}$		2.0		μs
t_{off}	$I_F=10\text{A}, I_G=200\text{mA}$		15		μs

(See Reverse Side)

JEDEC TO-48 CASE - MECHANICAL OUTLINE

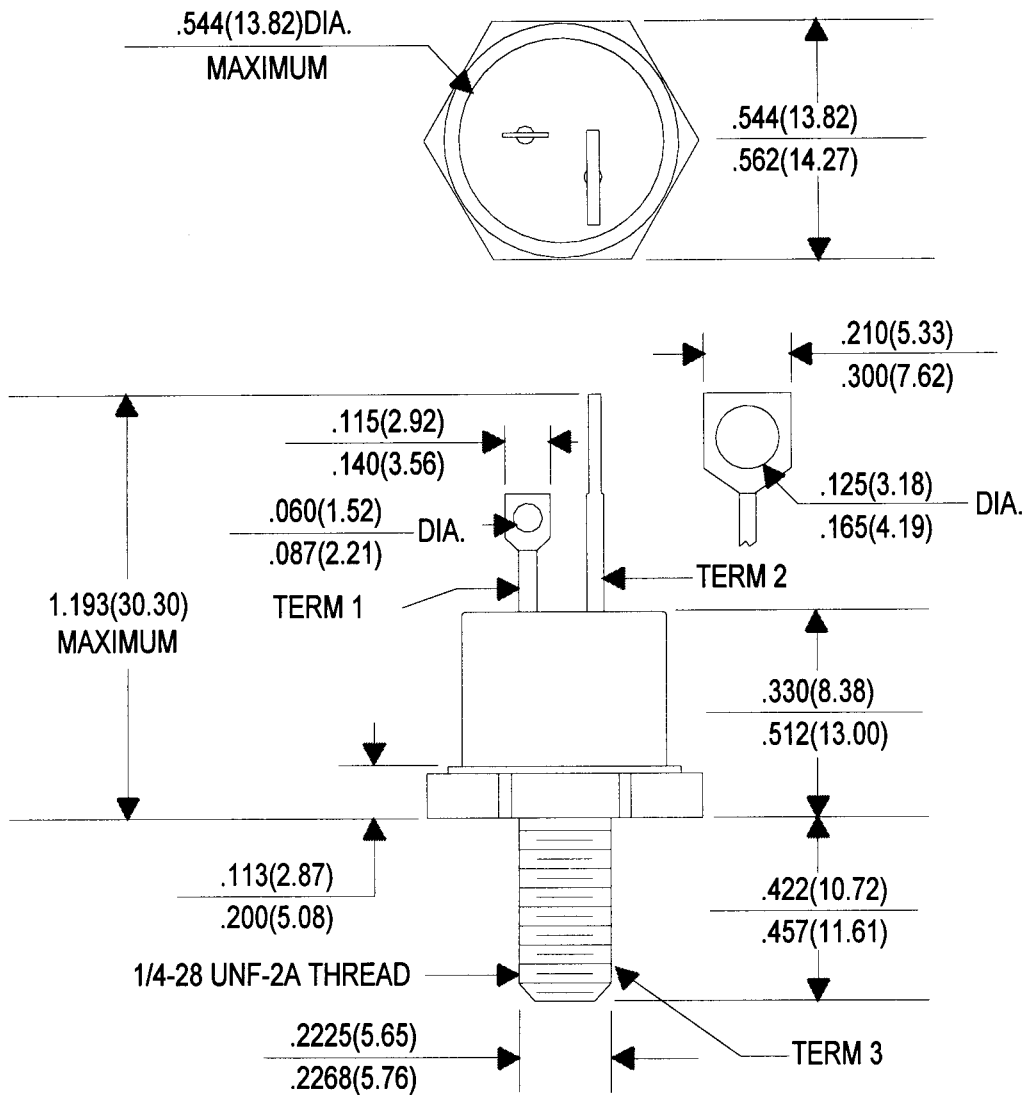

All Dimensions in Inches (mm).

LEAD CODE:

TERM 1) GATE
TERM 2) CATHODE
TERM 3) ANODE

CentralTM
Semiconductor Corp.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.