

BRX44 BRX47
BRX45 BRX48
BRX46 BRX49

SILICON CONTROLLED RECTIFIER
0.8 AMP, 30 THRU 400 VOLTS



TO-92 CASE

CentralTM
Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR BRX44 series types are PNP Silicon Controlled Rectifiers manufactured in a TO-92 case, designed for control systems and sensing circuit applications.

MARKING CODE: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

	SYMBOL	BRX44	BRX45	BRX46	BRX47	BRX48	BRX49	UNITS
Peak Repetitive Off-State Voltage	V_{DRM}, V_{RRM}	30	60	100	200	300	400	V
RMS On-State Current ($T_C=40^\circ\text{C}$)	$I_T(\text{RMS})$				0.8			A
Average On-State Current ($T_C=40^\circ\text{C}$)	$I_T(\text{AV})$				0.5			A
Nonrept. On-State Current ($T_C=60^\circ\text{C}$)	I_{TSM}				10			A
Fusing Current ($t=10\text{ms}$)	I^2t				0.24			A ² s
Peak Reverse Gate Voltage ($I_{GR}=10\mu\text{A}$)	V_{GRM}				8.0			V
Peak Gate Current ($t=10\mu\text{s}$)	I_{GM}				1.0			A
Peak Gate Dissipation ($t=10\mu\text{s}$)	P_{GM}				2.0			W
Gate Dissipation ($t=20\text{ms}$)	$P_G(\text{AV})$				0.1			W
Operating and Storage								
Junction Temperature	T_J, T_{stg}				-40 to +125			$^\circ\text{C}$
Thermal Resistance	θ_{JC}				100			$^\circ\text{C/W}$
Thermal Resistance	θ_{JA}				200			$^\circ\text{C/W}$


ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, R_{GK}=1.0\text{K}\Omega, T_C=25^\circ\text{C}$		1.0	μA
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, R_{GK}=1.0\text{K}\Omega, T_C=125^\circ\text{C}$		0.1	mA
V_{TM}	$I_T=1.0\text{A}$		1.7	V
I_{GT}	$V_D=6.0\text{V}, R_L=10\Omega$		200	μA
V_{GT}	$V_D=6.0\text{V}, R_L=10\Omega$		0.8	V
I_H	$R_{GK}=1.0\text{K}\Omega$		5.0	mA
I_L	$R_{GK}=1.0\text{K}\Omega$		6.0	mA
dv/dt	$V_D=0.67\text{V} \times V_{DRM}, R_{GK}=1.0\text{K}\Omega, T_C=125^\circ\text{C}$	100		V/ μs
di/dt	$I_G=10\text{mA}, di_G/dt=0.1\text{A}/\mu\text{s}, T_C=125^\circ\text{C}$	30		A/ μs

R0 (27-April 2004)

**SILICON CONTROLLED RECTIFIER
0.8 AMP, 30 THRU 400 VOLTS**

TO-92 CASE - MECHANICAL OUTLINE

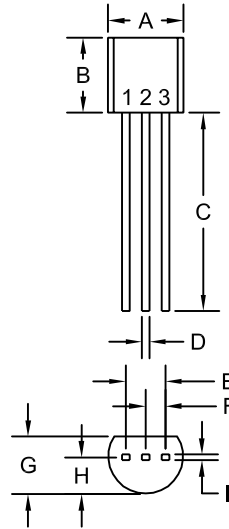

R1

LEAD CODE:

- 1) ANODE
- 2) GATE
- 3) CATHODE

MARKING CODE:

FULL PART NUMBER

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.175	0.205	4.45	5.21
B	0.170	0.210	4.32	5.33
C	0.500	-	12.70	-
D	0.016	0.022	0.41	0.56
E	0.100		2.54	
F	0.050		1.27	
G	0.125	0.165	3.18	4.19
H	0.080	0.105	2.03	2.67
I	0.015		0.38	

TO-92 (REV: R1)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.