

CentralTM Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

CMPD200
CMPD300
CMPD400

FORWARD REFERENCE DIODE
(STABISTOR)
JEDEC DO-35 CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR CMPD200 series types are multi-chip silicon diodes mounted in a JEDEC DO-35 case. These devices are designed for applications requiring controlled forward voltage characteristics such as voltage regulation, sensing, and comparing. This series is a direct replacement for the MPD200, MPD300, and MPD400 respectively.


MAXIMUM RATINGS ($T_A=25^\circ\text{C}$)

	<u>SYMBOL</u>		<u>UNITS</u>
Power Dissipation	P_D	400	mW
Operating and Storage Junction Temperature	T_J, T_{STG}	-65 to + 150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>CMPD200</u>		<u>CMPD300</u>		<u>CMPD400</u>		<u>UNITS</u>
		<u>MIN</u>	<u>MAX</u>	<u>MIN</u>	<u>MAX</u>	<u>MIN</u>	<u>MAX</u>	
I_R	$V_R=30\text{V}$		300		300		300	nA
BV_R	$I_R=5.0\mu\text{A}$	30		60		90		V
V_F	$I_F=10\mu\text{A}$	0.90	1.00	1.40	1.54	1.82	2.01	V
V_F	$I_F=100\mu\text{A}$	1.05	1.16	1.62	1.78	2.14	2.36	V
V_F	$I_F=1.0\text{mA}$	1.22	1.34	1.84	2.03	2.47	2.71	V
V_F	$I_F=10\text{mA}$	1.39	1.54	2.10	2.33	2.80	3.07	V
V_F	$I_F=100\text{mA}$	1.60	1.76	2.40	2.65	3.16	3.49	V

JEDEC DO-35 CASE - MECHANICAL OUTLINE

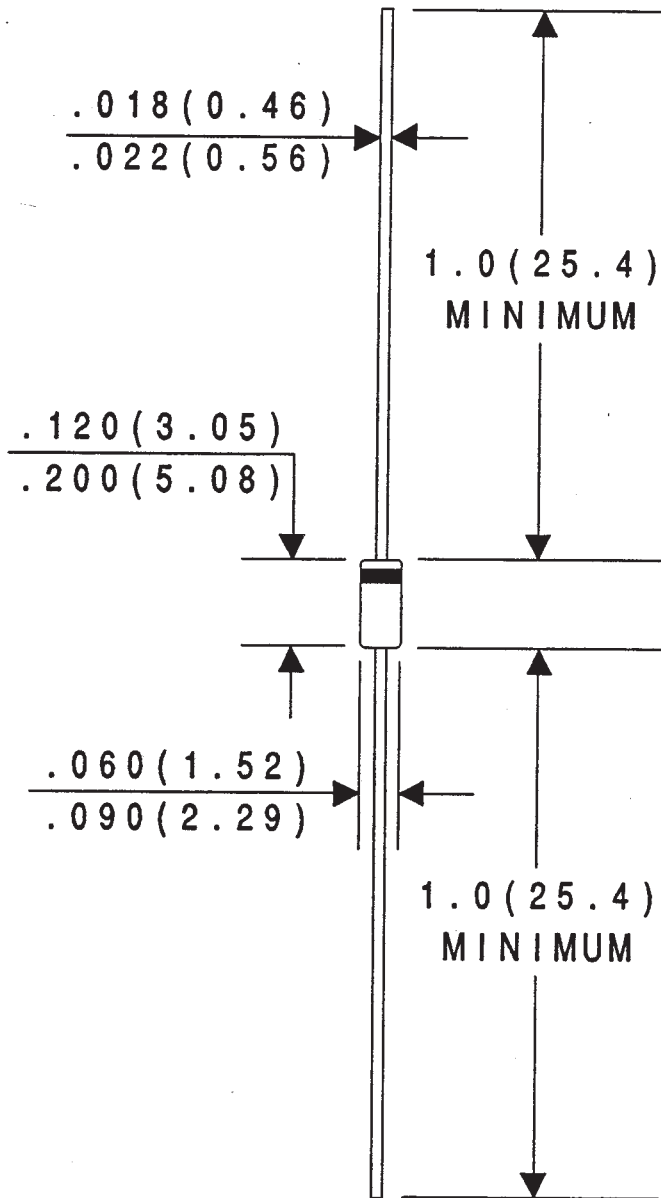

All Dimensions in Inches (mm).



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.