

TOSHIBA PHOTOCOUPLER GaAs IRED & PHOTO-TRIAC

TLP525G, TLP525G-2, TLP525G-4

TRIAC DRIVE

PROGRAMMABLE CONTROLLERS


AC-OUTPUT MODULE

SOLID STATE RELAY




The TOSHIBA TLP525G, -2 and -4 consist of a photo-triac optically coupled to a gallium arsenide infrared emitting diode. The TLP525G-2 offers two isolated channels in an eight lead plastic DIP package, while the TLP525G-4 provides four isolated channels in a sixteen lead plastic DIP package.

- Peak Off-state Voltage : 400V (MIN.)
- Trigger LED Current : 10mA (MAX.)
- Peak On-state Current : 2Apk (MAX.)
- Isolation Voltage : 2500V_{rms} (MIN.)
- UL Recognized : File No. E67349

PIN CONFIGURATIONS (TOP VIEW)

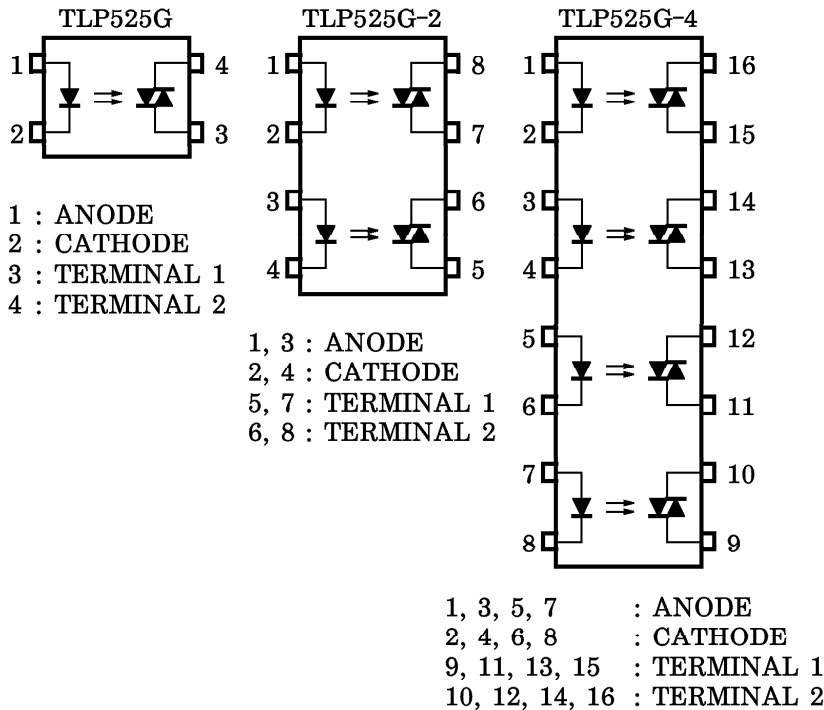

Unit in mm

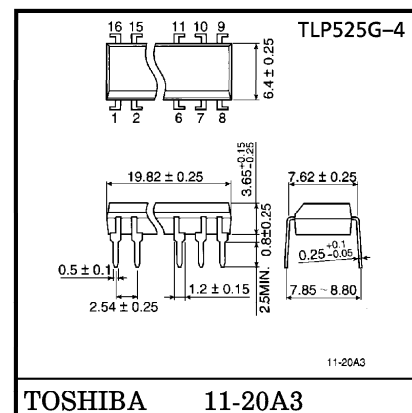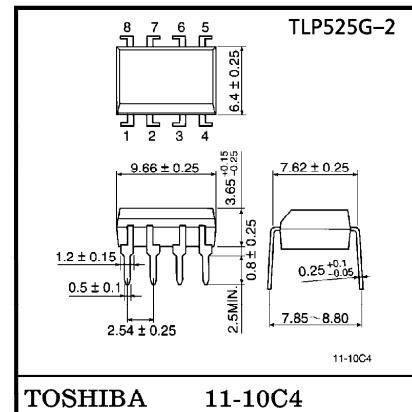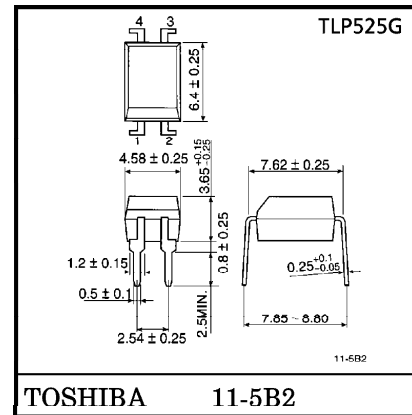

961001EAA2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING		UNIT
			TLP525G	TLP525G-2 TLP525G-4	
LED	Forward Current	I _F	50	50	mA
	Forward Current Derating	I _F / °C	−0.7 (Ta ≥ 53°C)	−0.5 (Ta ≥ 25°C)	mA / °C
	Pulse Forward Current	I _{FP}	1 (100μs pulse, 100pps)		A
	Reverse Voltage	V _R	5		V
	Junction Temperature	T _j	125		°C
DETECTOR	Off-State Output Terminal Voltage	V _{DRM}	400		V
	On-State RMS Current	I _T (RMS)	100	80	mA
			50	40	
	On-State Current Derating (Ta ≥ 25°C)	I _T / °C	−1.1	−0.9	mA / °C
	Peak On State Current	I _{TP}	2 (100μs pulse, 120pps)		A
	Peak Nonrepetitive Surge Current (P _w = 10ms, DC = 10%)	I _{TSM}	1.2		A
	Junction Temperature	T _j	115		°C
Storage Temperature Range		T _{stg}	−55~125		°C
Operating Temperature Range		T _{opr}	−40~100		°C
Lead Soldering Temperature		T _{sol}	260 (10s)		°C
Isolation Voltage (Note)		BV _S	2500 (AC, 1min., R.H. ≤ 60%)		V _{rms}

(Note) Device considered a two terminal device : LED side pins shorted together and DETECTOR side pins shorted together.

RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V _{AC}	—	—	120	V _{ac}
Forward Current	I _F	15	20	25	mA
Peak On-State Current	I _{TP}	—	—	1	A
Operating Temperature	T _{opr}	−25	—	85	°C

INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	V_F	$I_F=10\text{mA}$	1.0	1.15	1.3	V
	Reverse Current	I_R	$V_R=5\text{V}$	—	—	10	μA
	Capacitance	C_T	$V=0, f=1\text{MHz}$	—	30	—	pF
DETECTOR	Peak Off-State Current	I_{DRM}	$V_{\text{DRM}}=400\text{V}$	—	10	100	nA
	Peak On-State Voltage	V_{TM}	$I_{\text{TM}}=100\text{mA}$	—	1.7	3.0	V
	Holding Current	I_H	—	—	0.2	—	mA
	Critical Rate of Rise of Off-State Voltage	dv/dt	$V_{\text{in}}=120\text{V}_{\text{rms}}, T_a=85^\circ\text{C}$ (Figure 1)	200	500	—	$\text{V}/\mu\text{s}$
	Critical Rate of Rise of Commutating Voltage	$dv/dt(c)$	$V_{\text{in}}=30\text{V}_{\text{rms}}, I_T=15\text{mA}$ (Figure 1)	—	0.2	—	$\text{V}/\mu\text{s}$

COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Trigger LED Current	I_{FT}	$V_T=3\text{V}$	—	5	10	mA
Capacitance Input to Output	C_S	$V_S=0, f=1\text{MHz}$	—	0.8	—	pF
Isolation Resistance	R_S	$V_S=500\text{V}, \text{R.H.} \leq 60\%$	5×10^{10}	10^{14}	—	Ω
Isolation Voltage	BV_S	AC, 1 minute	2500	—	—	V_{rms}
		AC, 1 second, in oil	—	5000	—	
		DC, 1 minute, in oil	—	5000	—	V_{dc}

Fig.1 dv/dt TEST CIRCUIT

