


# B40C800G THRU B380C800G

## GLASS PASSIVATED SINGLE - PHASE BRIDGE RECTIFIER

Reverse Voltage - 65 to 600 Volts Forward Current - 0.9 Ampere


### Case Style WOG

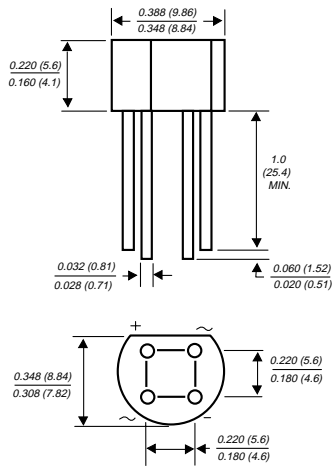

Dimensions in inches and (millimeters)

### FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated chip junctions
- ◆ High case dielectric strength
- ◆ Typical  $I_R$  less than  $0.1 \mu A$
- ◆ High overload surge current
- ◆ Ideal for printed circuit boards
- ◆ High temperature soldering guaranteed:  
260°C/10 seconds, 0.375" (9.5mm) lead length  
5 lbs. (2.3kg) tension



### MECHANICAL DATA

**Case:** Molded plastic body over passivated junctions

**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026

**Mounting Position:** Any

**Weight:** 0.04 ounce, 1.1 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.


	SYMBOLS	B40 C800G	B80 C800G	B125 C800G	B250 C800G	B380 C800G	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	65	125	200	400	600	Volts
Maximum RMS input voltage R + C-load	$V_{RMS}$	40	80	125	250	380	Volts
Maximum average forward output current for free air operation at $T_A=45^\circ C$ R + L-load C-Load	$I_{(AV)}$	0.9 0.8					Amps
Maximum non-repetitive peak voltage	$V_{RSM}$	100	200	350	600	1000	Volts
Maximum DC blocking voltage	$V_{DC}$	65	125	200	400	600	Volts
Maximum peak working voltage	$V_{RWM}$	90	180	300	600	900	Volts
Maximum repetitive peak forward surge current	$I_{FRM}$	10.0					Amps
Peak forward surge current single sine wave on rated load at $T_J=125^\circ C$	$I_{FSM}$	45.0					Amps
Rating for fusing at $T_J=125^\circ C$ ( $t < 100ms$ )	$I^2t$	10.0					A <sup>2</sup> sec
Minimum series resistor C-load at $V_{RMS} = \pm 10\%$	$R_t$	1.0	2.0	4.0	8.0	12.0	Ohms
Maximum load capacitance +50% -10%	$C_L$	5000	2500	1000	500	200	$\mu F$
Maximum instantaneous forward voltage drop per leg at 0.9A	$V_F$	1.0					Volts
Maximum reverse current at rated repetitive peak voltage per leg	$I_R$	10.0					$\mu A$
Typical thermal resistance per leg (NOTE 1)	$R_{\theta JA}$ $R_{\theta JL}$	36.0 11.0					$^\circ C/W$
Operating junction temperature range	$T_J$	-40 to +125					$^\circ C$
Storage temperature range	$T_{STG}$	-40 to +150					$^\circ C$

#### NOTES:


(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. at 0.375" (9.5mm) lead lengths with 0.2 x 0.2" (5.5 x 5.5mm) copper pads.

# RATINGS AND CHARACTERISTICS CURVES B40C800G THRU B380C800G


**FIG. 1 - DERATING CURVES OUTPUT RECTIFIED CURRENT FOR B40C800G...B125C800G**

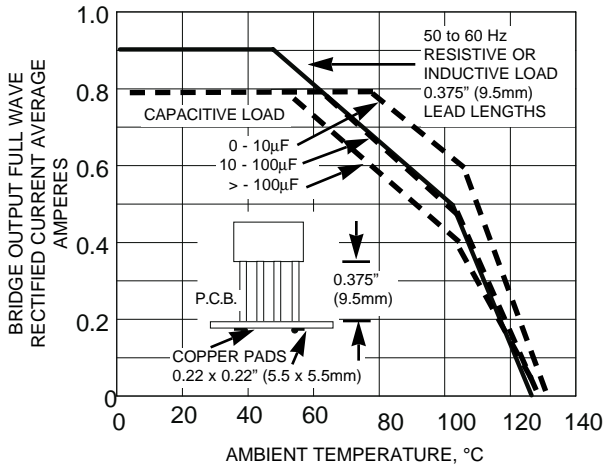


**FIG. 2 - DERATING CURVES FOR OUTPUT RECTIFIED CURRENT B250C800G...B380C800G**

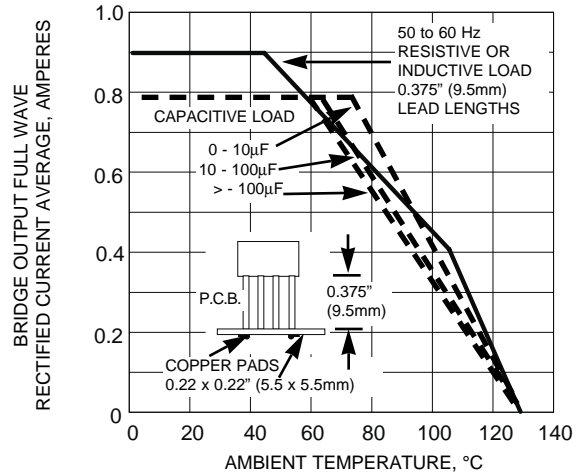


**FIG. 3 - MAXIMUM NON-REPETITIVE PEAK FORWARD CURRENT PER LEG**

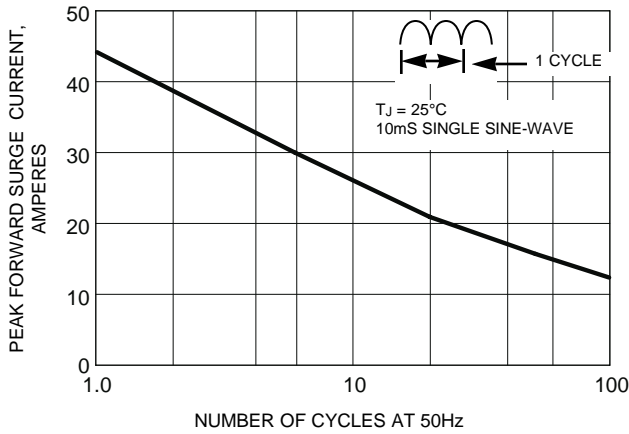


**FIG. 4 - TYPICAL FORWARD CHARACTERISTICS PER LEG**

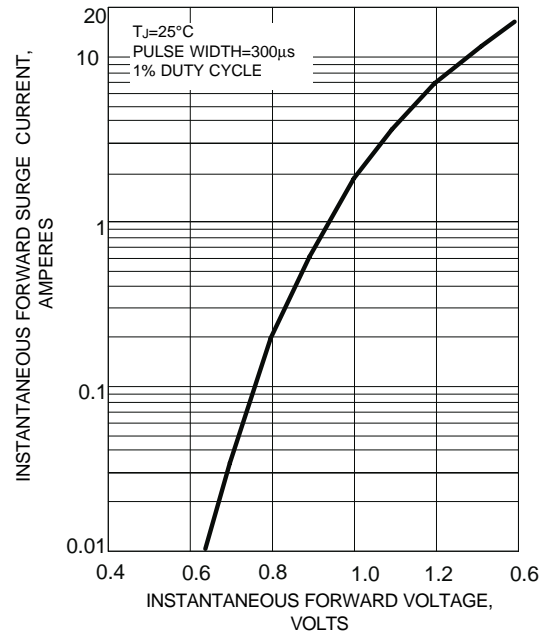

**FIG. 5 - TYPICAL REVERSE CHARACTERISTICS PER LEG**

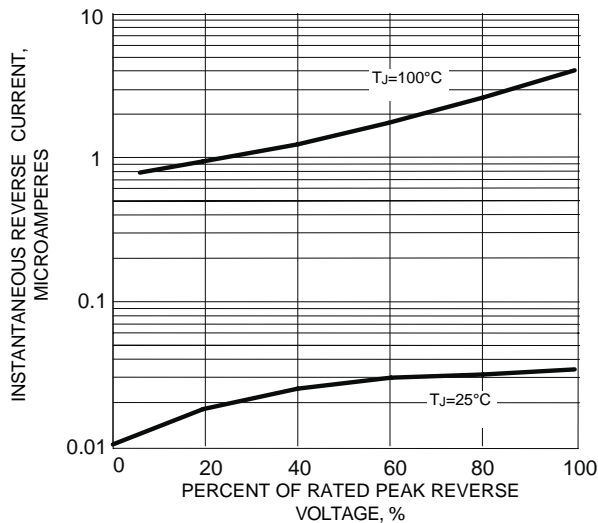

**FIG. 6 - TYPICAL JUNCTION CAPACITANCE PER LEG**

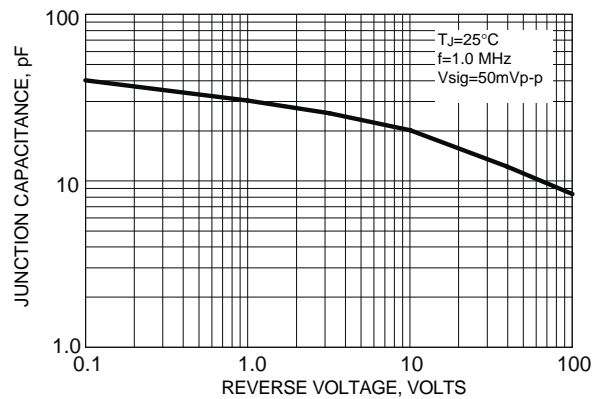



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.