

# AW005G - AW10G

# AVALANCHE GLASS PASSIVATED BRIDGE RECTIFIERS

**PRV : 50 - 1000 Volts**


**Io : 1.5 Amperes**

### FEATURES :

- \* Glass passivated chip
- \* High case dielectric strength
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Ideal for printed circuit board

### MECHANICAL DATA :

- \* Case : Reliable low cost construction utilizing molded plastic technique
- \* Epoxy : UL94V-O rate flame retardant
- \* Terminals : Plated leads solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Polarity symbols marked on case
- \* Mounting position : Any
- \* Weight : 1.29 grams

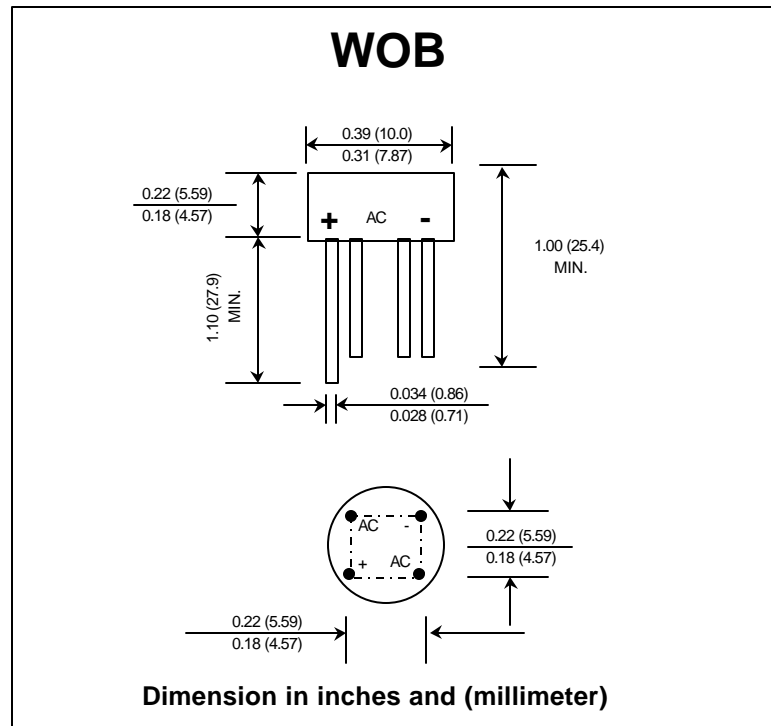

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.


RATING	SYMBOL	AW 005G	AW 01G	AW 02G	AW 04G	AW 06G	AW 08G	AW 10G	UNIT
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Minimum Avalanche Breakdown Voltage at 100 $\mu$ A	$V_{BO(min.)}$	100	150	250	450	700	900	1100	Volts
Maximum Avalanche Breakdown Voltage at 100 $\mu$ A	$V_{BO(max.)}$	550	600	700	900	1150	1350	1550	Volts
Maximum Average Forward Current 0.375" (9.5 mm) lead length $T_c = 25^\circ C$	$I_{F(AV)}$	1.5							Amps.
Peak Forward Surge Current Single half sine wave Superimposed on rated load (JEDEC Method)	$I_{FSM}$	50							Amps.
Rating for fusing ( t < 8.3 ms. )	$I_t^2$	10							A <sup>2</sup> S
Maximum Forward Voltage per Diode at $I_F = 1.0$ Amp.	$V_F$	1.0							Volts
Maximum DC Reverse Current $T_a = 25^\circ C$ at Rated DC Blocking Voltage $T_a = 100^\circ C$	$I_R$	10							$\mu$ A
	$I_{R(H)}$	1.0							mA
Typical Junction Capacitance per Diode (Note 1)	$C_J$	24							pf
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	36							$^\circ C/W$
Operating Junction Temperature Range	$T_J$	- 50 to + 150							$^\circ C$
Storage Temperature Range	$T_{STG}$	- 50 to + 150							$^\circ C$

### Notes :


- 1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
- 2) Thermal resistance from Junction to Ambient at 0.375" (9.5 mm) lead length P.C. Board mounting.

## RATING AND CHARACTERISTIC CURVES ( AW005G - AW10G )


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

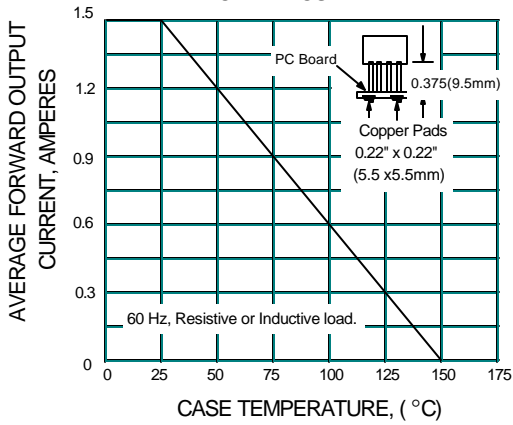


**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

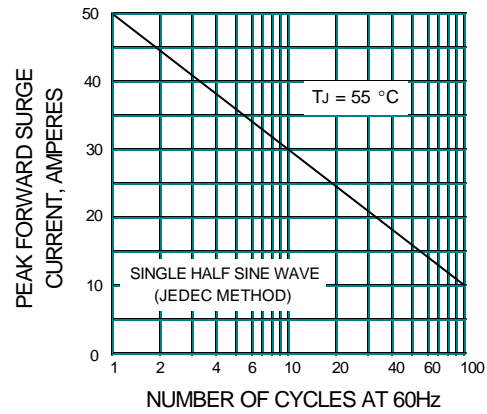

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS**

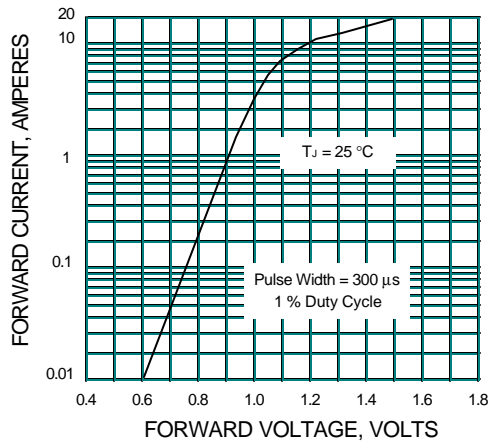

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

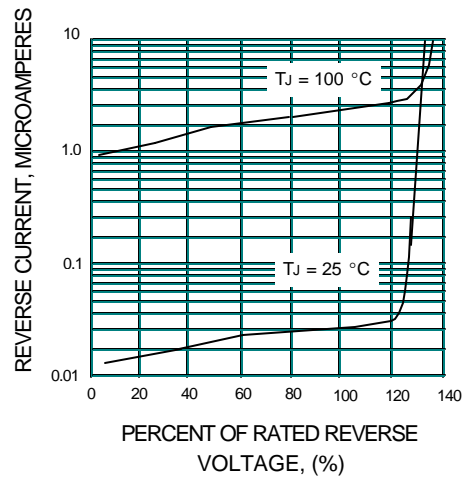



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.