


**CMPD6263  
CMPD6263A  
CMPD6263C  
CMPD6263S**

**SCHOTTKY DIODES**



**SOT-23 CASE**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMPD6263 Series types are Silicon Schottky diodes designed for low current surface mount fast switching applications requiring a low forward voltage drop.

The following configurations are available:

CMPD6263	SINGLE	<b>MARKING CODE: D76</b>
CMPD6263A	DUAL, COMMON ANODE	<b>MARKING CODE: D98</b>
CMPD6263C	DUAL, COMMON CATHODE	<b>MARKING CODE: D97</b>
CMPD6263S	DUAL, IN SERIES	<b>MARKING CODE: D96</b>


**MAXIMUM RATINGS** ( $T_A=25^{\circ}\text{C}$ )

	<b>SYMBOL</b>		<b>UNITS</b>
Peak Repetitive Reverse Voltage	$V_{RRM}$	70	V
Continuous Forward Current	$I_F$	15	mA
Forward Surge Current, $t_p=1.0$ s	$I_{FSM}$	50	mA
Power Dissipation	$P_D$	350	mW
Operating and Storage			
Junction Temperature	$T_J, T_{stg}$	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance	$\Theta_{JA}$	357	$^{\circ}\text{C}/\text{W}$


**ELECTRICAL CHARACTERISTICS** ( $T_A=25^{\circ}\text{C}$ )

<b>SYMBOL</b>	<b>TEST CONDITIONS</b>	<b>MIN</b>	<b>TYP</b>	<b>MAX</b>	<b>UNITS</b>
$B_{VR}$	$I_R=10\mu\text{A}$	70			V
$V_F$	$I_F=1.0\text{mA}$		395	410	mV
$I_R$	$V_R=50\text{V}$		98	200	nA
$C_T$	$V_R=0\text{V}, f=1.0\text{MHz}$			2.0	pF


All dimensions in inches (mm).

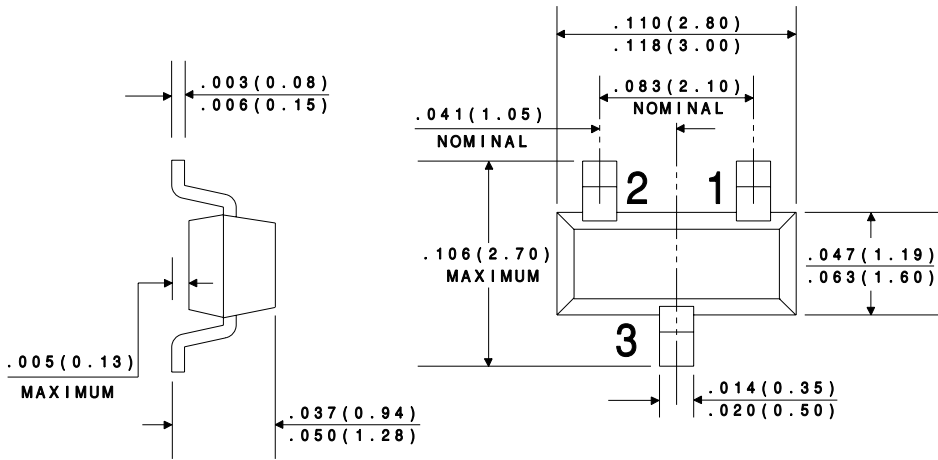


No  
Connection




**CMPD6263**

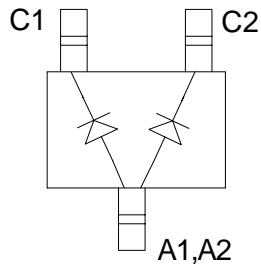

**CMPD6263A**



**CMPD6263C**



**CMPD6263S**



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.