


Rectifier Diode Avalanche Diode

$V_{RRM} = 800-1800\text{ V}$
 $I_{F(RMS)} = 7\text{ A}$
 $I_{F(AV)M} = 3.6\text{ A}$

V_{RSM} V	$V_{(BR)min}$ ① V	V_{RRM} V	Standard Types	Avalanche Types
900		800	DS 2-08A	
1300	1300	1200	DS 2-12A	DSA 2-12A
1700	1750	1600		DSA 2-16A
1900	1950	1800		DSA 2-18A

① Only for Avalanche Diodes



A = Anode C = Cathode

Symbol	Test Conditions	Maximum Ratings	
$I_{F(RMS)}$	$T_{VJ} = T_{VJM}$	7	A
$I_{F(AV)M}$	$T_{amb} = 45^{\circ}\text{C}; R_{thJA} = 30\text{ K/W}; 180^{\circ}\text{ sine}$	3.6	A
	$T_{amb} = 45^{\circ}\text{C}; R_{thJA} = 115\text{ K/W}; 180^{\circ}\text{ sine}$	1.2	A
P_{RSM}	DSA types, $T_{VJ} = 25^{\circ}\text{C}, t_p = 10\text{ }\mu\text{s}$	2.5	kW
I_{FSM}	$T_{VJ} = 45^{\circ}\text{C}; V_R = 0;$ $t = 10\text{ ms (50 Hz), sine}$	120	A
	$t = 8.3\text{ ms (60 Hz), sine}$	127	A
I^2t	$T_{VJ} = 45^{\circ}\text{C}; V_R = 0;$ $t = 10\text{ ms (50 Hz), sine}$	72	A ² s
	$t = 8.3\text{ ms (60 Hz), sine}$	68	A ² s
I^2t	$T_{VJ} = 45^{\circ}\text{C}; V_R = 0;$ $t = 10\text{ ms (50 Hz), sine}$	50	A ² s
	$t = 8.3\text{ ms (60 Hz), sine}$	47	A ² s
T_{VJM}		180	°C
T_{VJ}		-40...+180	°C
T_{stg}		-40...+180	°C
Weight		2.4	g

Features

- International standard package
- Axial wire connexions
- Planar glassivated chips


Applications

- Low power rectifiers
- Field supply for DC motors
- Power supplies
- High voltage rectifiers

Advantages

- Space and weight savings
- Simple PCB mounting
- Improved temperature and power cycling
- Reduced protection circuits

Dimensions in mm (1 mm = 0.0394")

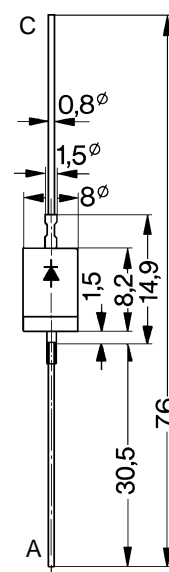

Symbol	Test Conditions	Characteristic Values	
I_R	$T_{VJ} = 180^{\circ}\text{C}; V_R = V_{RRM}$	\leq	2 mA
V_F	$I_F = 7\text{ A}; T_{VJ} = 25^{\circ}\text{C}$	\leq	1.25 V
V_{T0}	For power-loss calculations only	0.85	V
r_T	$T_{VJ} = T_{VJM}$	43	mΩ
R_{thJA}	Forced air cooling with 1.5 m/s, $T_{amb} = 45^{\circ}\text{C}$	30	K/W
	Soldered between 2 cooling fins, $T_{amb} = 45^{\circ}\text{C}$	37	K/W
	Soldered onto PC board (25 mm), $T_{amb} = 45^{\circ}\text{C}$	75	K/W
	Free air cooling, $T_{amb} = 45^{\circ}\text{C}$	115	K/W
d_s	Creepage distance on surface	2.25	mm
d_A	Strike distance through air	2.25	mm
a	Max. allowable acceleration	100	m/s ²

Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions

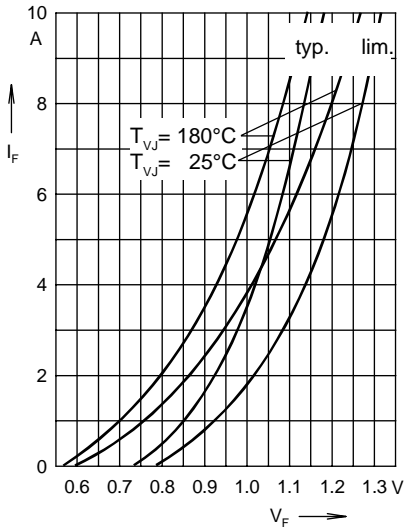


Fig. 1 Forward characteristics

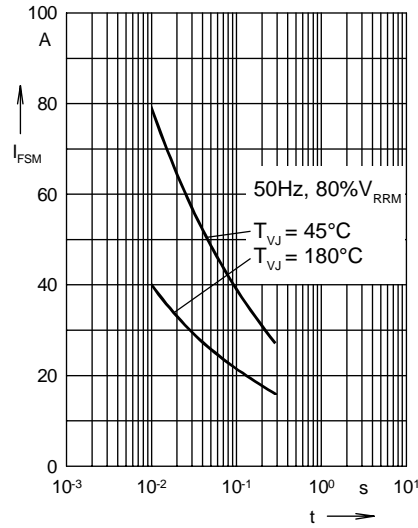


Fig. 2 Surge overload current
 I_{FSM} : crest value, t: duration

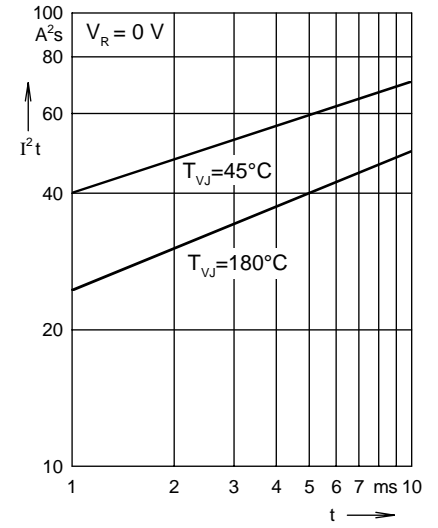


Fig. 3 I^2t versus time (1-10 ms)

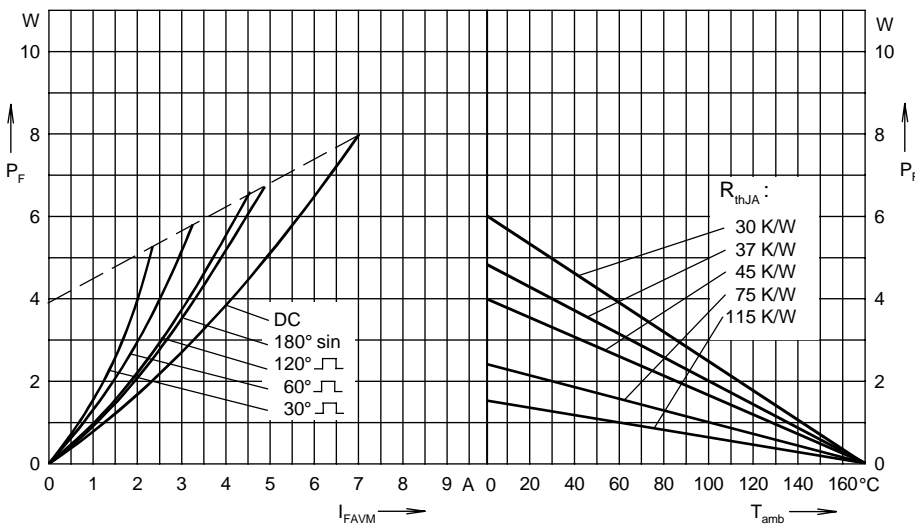


Fig. 4 Power dissipation versus forward current and ambient temperature

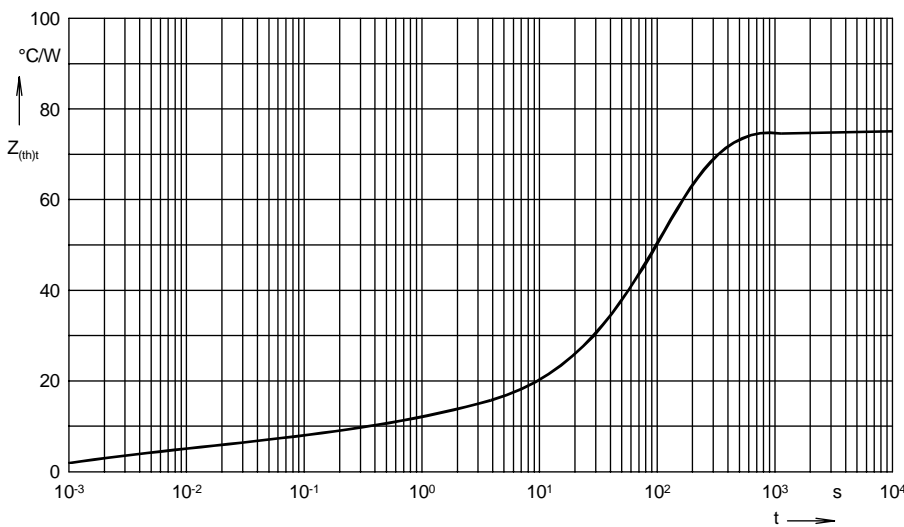


Fig. 5 Transient thermal impedance junction to ambient

R_{thJA} for various conduction angles d:

d	R_{thJA} (K/W)
DC	75
180°	75.7
120°	76.1
60°	76.7
30°	77.4

Constants for Z_{thJA} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.15	0.001
2	10.85	0.1
3	64	35



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.