

**Major Ratings and Characteristics**


Characteristics	22CGQ045	Units
$I_{F(AV)}$ Rectangular waveform	35*	A
$V_{RRM}$	45	V
$I_{FSM}$ @ $t_p = 8.3ms$ sine	300	A
$V_F$ @ 20Apk, $T_J = 125^\circ C$ (Per Leg)	0.70	V
$T_J, T_{stg}$ Operating and storage	-55 to 150	$^\circ C$

\* $I_{F(AV)}$  current limited by pin diameter

**Description/Features**

The 22CGQ045 center tap Schottky rectifier has been expressly designed to meet the rigorous requirements of hi-rel environments. It is packaged in the hermetic, isolated, TO-254AA package and has extremely low reverse leakage at high temperature. Full MIL-PRF-19500 quality conformance testing is available on source controlled drawings to JANTX, JANTXV, or JANS levels. Typical applications include switching power supplies and resonant power converters.

- Hermetically sealed
- Center tap
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Electrically isolated
- Ceramic eyelets

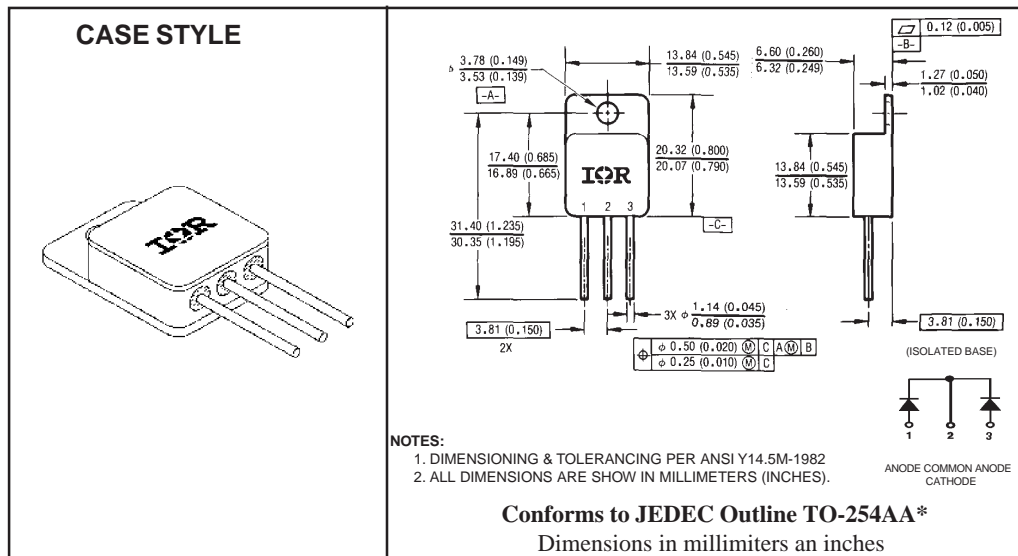

**Voltage Ratings**

Part number	22CGQ045
V <sub>R</sub> Max. DC Reverse Voltage (V) (Per Leg)	45
V <sub>RWM</sub> Max. Working Peak Reverse Voltage (V) (Per Leg)	

**Absolute Maximum Ratings**

Parameters	22CGQ045	Units	Conditions
I <sub>F(AV)</sub> Max. Average Forward Current *See Fig. 4	35*	A	50% duty cycle @ T <sub>C</sub> = 100°C, rectangular waveform *I <sub>F(AV)</sub> current limited by pin diameter
I <sub>FSM</sub> Max. Peak One Cycle Non - Repetitive Surge Current (Per Leg)	300	A	@ t <sub>p</sub> = 8.3 ms sine

**Electrical Specifications**

Parameters	22CGQ045	Units	Conditions
V <sub>FM</sub> Max. Forward Voltage Drop (Per Leg) *See Fig. 1 ①	0.75	V	@ 20A T <sub>J</sub> = 25°C
	0.97	V	@ 35A
	0.70	V	@ 20A T <sub>J</sub> = 125°C
	0.91	V	@ 35A
I <sub>RM</sub> Max. Reverse Leakage Current (Per Leg) *See Fig. 2 ①	0.5	mA	T <sub>J</sub> = 25°C
	20	mA	T <sub>J</sub> = 125°C
C <sub>T</sub> Max. Junction Capacitance (Per Leg)	1400	pF	V <sub>R</sub> = 5V <sub>DC</sub> , (test signal range 100KHz to 1MHz) 25°C
L <sub>S</sub> Typical Series Inductance (Per Leg)	8.7	nH	Measured lead to lead 5mm from package body

**Thermal-Mechanical Specifications**

Parameters	22CGQ045	Units	Conditions
T <sub>J</sub> Max. Junction Temperature Range	-55 to 150	°C	
T <sub>stg</sub> Max. Storage Temperature Range	-55 to 150	°C	
R <sub>thJC</sub> Max. Thermal Resistance, Junction to Case (Per Leg)	1.25	°C/W	DC operation *See Fig. 5
R <sub>thJC</sub> Max. Thermal Resistance, Junction to Case (Per Package)	0.625	°C/W	DC operation
R <sub>thCS</sub> Typical Thermal Resistance, Case to Heatsink	0.21	°C/W	Mounting surface, smooth and greased
wt Weight (Typical)	9.3	g	
Die Description (Square)	0.150	inches	
Case Style	TO-254AA	JEDEC	

① Pulse Width &lt; 300μs, Duty Cycle &lt; 2%

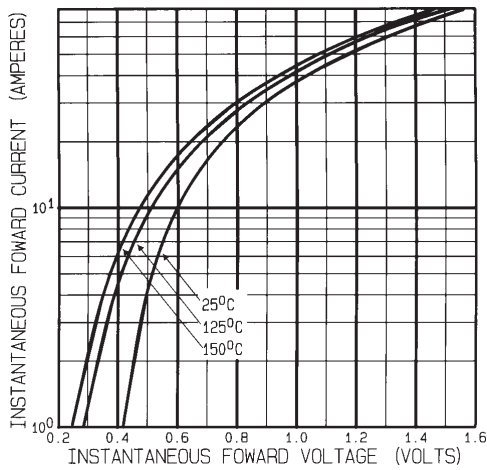


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

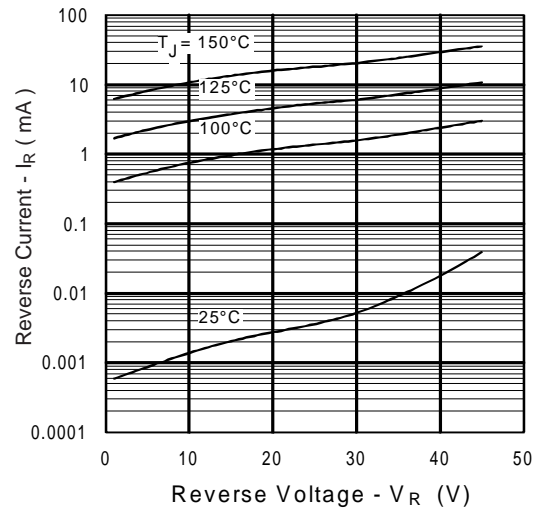


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage (Per Leg)

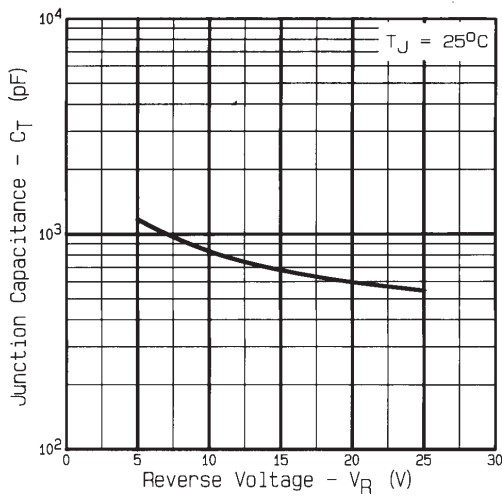


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

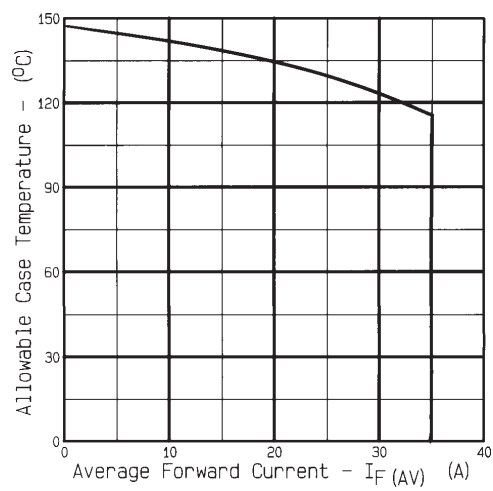


Fig. 4 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

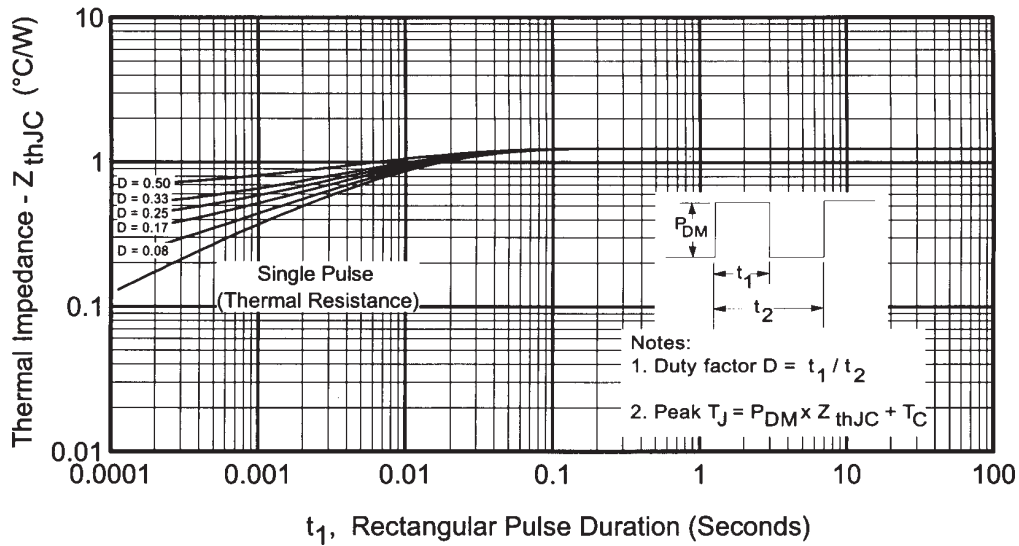


Fig.5 - Max. Thermal Impedance  $Z_{thJC}$  characteristics (Per Leg)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.