


# Low Vf Schottky Powermod FST19035 — FST19050

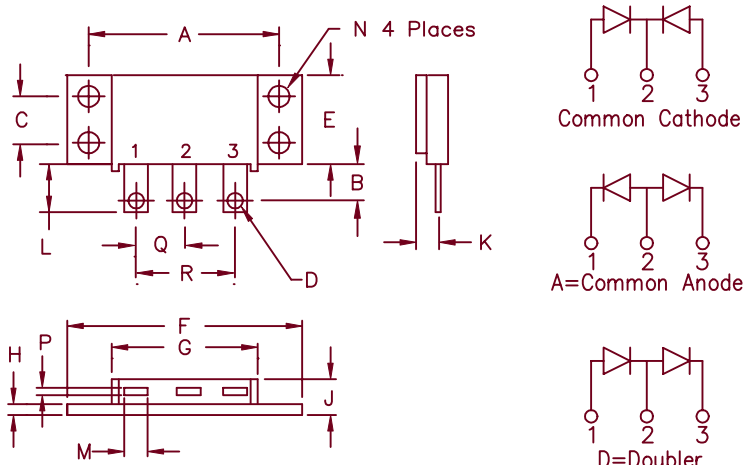

Notes:  
Baseplate: Nickel plated copper;  
electrically isolated  
Pins: Nickel plated copper

	Dim. Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	1.995	2.005	50.67	50.93	
B	0.300	0.325	7.62	8.26	
C	0.495	0.505	12.57	12.83	
D	0.182	0.192	4.62	4.88	Dia.
E	0.990	1.010	25.15	25.65	
F	2.390	2.410	60.71	61.21	
G	1.500	1.525	38.10	38.70	
H	0.120	0.130	3.05	3.30	
J	---	0.400	---	10.16	
K	0.240	0.260	6.10	6.60	to Lead CL
L	0.490	0.510	12.45	12.95	
M	0.330	0.350	8.38	6.90	
N	0.175	0.195	4.45	4.95	Dia.
P	0.035	0.045	0.89	1.14	
Q	0.445	0.455	11.30	11.56	
R	0.890	0.910	22.61	23.11	

## TO-249

Microsemi Catalog Number	Working Peak Peak Reverse Voltage	Repetitive Peak Peak Reverse Voltage
FST19035*	35V	35V
FST19040*	40V	40V
FST19045*	45V	45V
FST19050*	50V	50V

\*Add the Suffix A for Common Anode, D for Doubler

- Guard Ring Protection
- Electrically Isolated Base
- Schottky Barrier Rectifier
- Low Forward Voltage
- Reverse Energy Tested
- $V_{RRM}$  35 to 50 Volts

## Electrical Characteristics

Average Forward Current per pkg.	$I_{F(AV)}$ 200 Amps	$T_C = 136^\circ\text{C}$ , Square wave, $R_{\theta JC} = 0.35^\circ\text{C/W}$
Average Forward Current per leg	$I_{F(AV)}$ 100 Amps	$T_C = 136^\circ\text{C}$ , Square wave, $R_{\theta JC} = 0.7^\circ\text{C/W}$
Maximum Surge Current per leg	$I_{FSM}$ 1500 Amps	8.3ms, half sine, $T_J = 175^\circ\text{C}$
Max. Peak Forward Voltage per leg	$V_{FM}$ .55 Volts	$I_{FM} = 100\text{A}; T_J = 175^\circ\text{C}^*$
Max. Peak Forward Voltage per leg	$V_{FM}$ .70 Volts	$I_{FM} = 100\text{A}; T_J = 25^\circ\text{C}^*$
Max. Peak Reverse Current per leg	$I_{RM}$ 100 mA	$V_{RRM}, T_J = 125^\circ\text{C}^*$
Max. Peak Reverse Current per leg	$I_{RM}$ 4 mA	$V_{RRM}, T_J = 25^\circ\text{C}$
Typical Junction Capacitance per leg	$C_J$ 4800 pF	$V_R = 5.0\text{V}, T_J = 25^\circ\text{C}$

\*Pulse test: Pulse width 300  $\mu\text{sec}$ , Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range	TSTG	$-55^\circ\text{C}$ to $175^\circ\text{C}$
Operating junction temp range	$T_J$	$-55^\circ\text{C}$ to $175^\circ\text{C}$
Max thermal resistance per leg	$R_{\theta JC}$	$0.7^\circ\text{C/W}$ Junction to case
Max thermal resistance per pkg.	$R_{\theta JC}$	$0.35^\circ\text{C/W}$
Typical thermal resistance (greased)	$R_{\theta JC}$	$0.1^\circ\text{C/W}$ Case to sink
Mounting Torque		15–20 inch pounds
Weight		2.3 ounces (58.5 grams) typical

# FST19035 — FST19050

Figure 1  
Typical Forward Characteristics — Per Leg

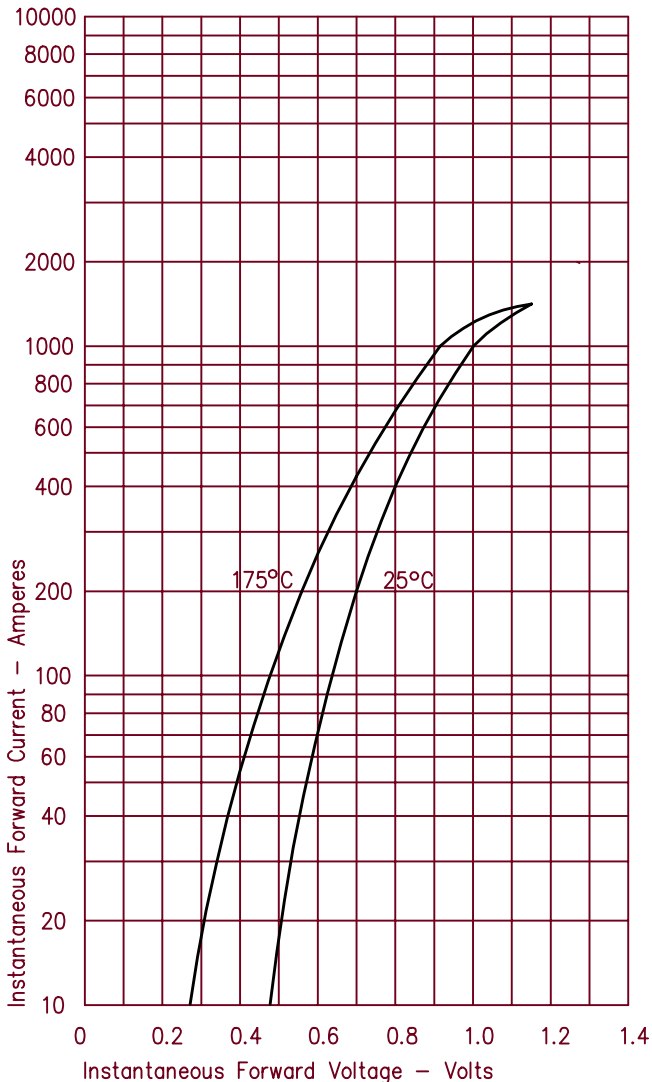


Figure 3  
Typical Junction Capacitance — Per Leg

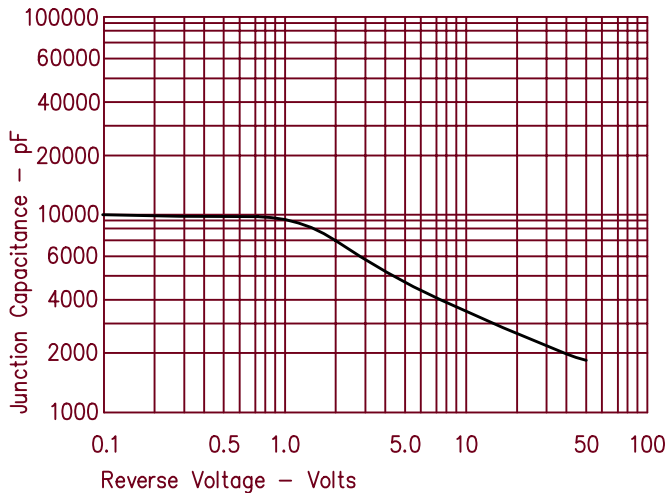


Figure 4  
Forward Current Derating — Per Leg

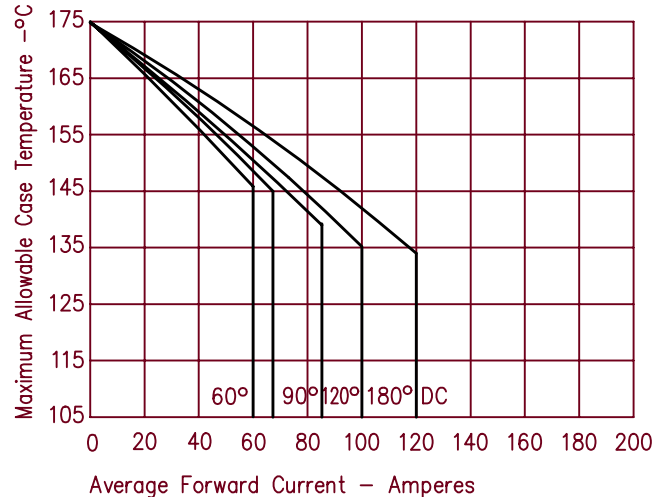


Figure 2  
Typical Reverse Characteristics — Per Leg


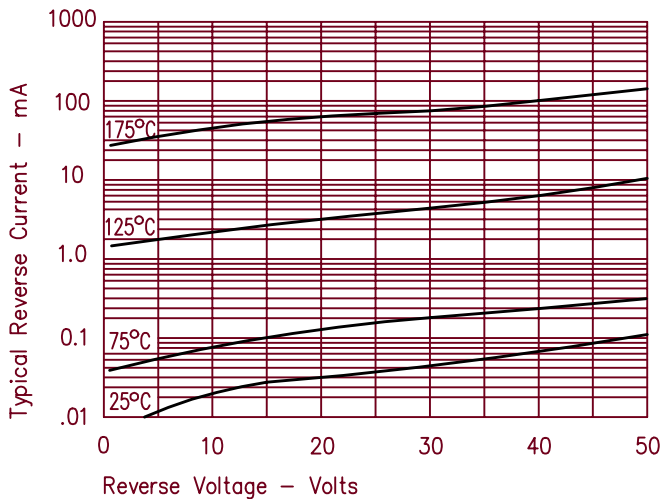


Figure 5  
Maximum Forward Power Dissipation — Per Leg



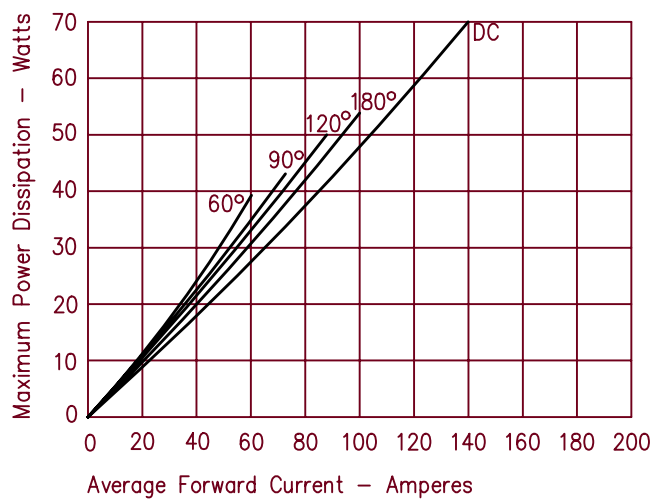

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.