

CentralTM Semiconductor Corp.

145 Adams Ave., Hauppauge, NY 11788 USA
Phone (631) 435-1110 FAX (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

www.centrasemi.com

CCL0035 THRU CCL5750

CURRENT LIMITING DIODE

JEDEC DO-35 CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR CCL0035 Series types are silicon field effect current regulator diodes designed for applications requiring a constant current over a wide voltage range. These devices are manufactured in the cost effective DO-35 double plug case, which provides many benefits to the user including space saving and improved thermal characteristics. Special selections of I_P (regulator current) are available for critical applications. This series is the most cost effective of the current limiting diode family.

MAXIMUM RATINGS ($T_L=75^\circ\text{C}$ unless otherwise noted)

	SYMBOL		UNITS
Peak Operating Voltage	POV	100	V
Power Dissipation	P_D	600	mW
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +200	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)


TYPE NO.	REGULATOR CURRENT(1)			DYNAMIC IMPEDANCE	KNEE IMPEDANCE	LIMITING VOLTAGE	TEMPERATURE COEFFICIENT
	$I_P @ V_T=25\text{V}$			$Z_T @ V_T=25\text{V}$	$Z_K @ V_K=6.0\text{V}$	$V_L @ I_L=0.8 I_P \text{ MIN}$	TC^*
	mA			M Ω	M Ω	V	$\% / ^\circ\text{C}$
	MIN	NOM	MAX	MIN	MIN	MAX	
CCL0035	0.010	0.035	0.060	8.0	4.0	0.4	+2.10 TO +0.10
CCL0130	0.050	0.130	0.210	6.0	2.0	0.6	+2.10 TO +0.10
CCL0300	0.200	0.310	0.420	4.0	1.0	0.8	+0.40 TO -0.20
CCL0500	0.400	0.515	0.630	2.0	0.5	1.1	+0.15 TO -0.25
CCL0750	0.600	0.760	0.920	1.0	0.2	1.4	0.0 TO -0.32
CCL1000	0.880	1.100	1.320	0.65	0.1	1.7	-0.10 TO -0.37
CCL1500	1.280	1.500	1.720	0.45	0.070	2.0	-0.13 TO -0.40
CCL2000	1.680	2.000	2.320	0.35	0.050	2.3	-0.15 TO -0.42
CCL2700	2.280	2.690	3.100	0.30	0.030	2.7	-0.18 TO -0.45
CCL3500	3.000	3.550	4.100	0.25	0.020	3.2	-0.20 TO -0.47
CCL4500	3.900	4.500	5.100	0.20	0.010	3.7	-0.22 TO -0.50
CCL5750	5.000	5.750	6.500	0.05	0.005	4.5	-0.25 TO -0.53

*The Temperature Coefficient is measured between the following points: $+25^\circ\text{C}$, $+50^\circ\text{C}$

(1) PULSED METHOD PULSE WIDTH (ms) = $27.5 / I_P \text{ NOM (mA)}$

(SEE REVERSE SIDE)

DO-35 PACKAGE - MECHANICAL OUTLINE

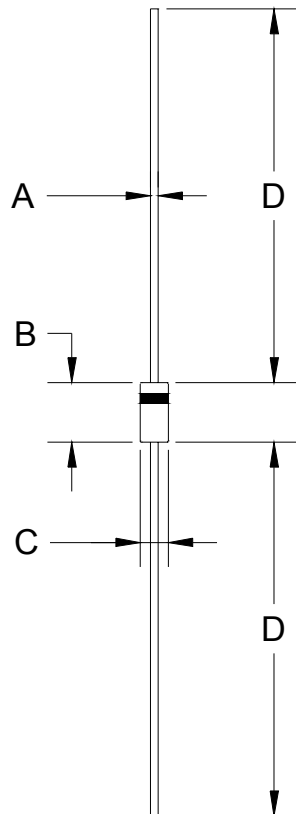

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.018	0.022	0.46	0.56
B	0.120	0.200	3.05	5.08
C	0.060	0.090	1.52	2.29
D	1.000	-	25.40	-

DO-35 (REV: R1)

R1

Central[™]
Semiconductor Corp.

145 Adams Ave., Hauppauge, NY 11788 USA
Phone (631) 435-1110 FAX (631) 435-1824

Manufacturers of World Class Discrete Semiconductors
www.centralsemi.com



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.