


**INPUT RECTIFIER DIODE**


	$V_F < 1V @ 10A$
	$I_{FSM} = 300A$
	$V_{RRM} 800 \text{ to } 1200V$

**Description/Features**

The 20ETS.. rectifier **SAFEIR** series has been optimized for very low forward voltage drop, with moderate leakage. The glass passivation technology used has reliable operation up to 150°C junction temperature.

Typical applications are in input rectification and these products are designed to be used with International Rectifier Switches and Output Rectifiers which are available in identical package outlines.


**Package Outline**

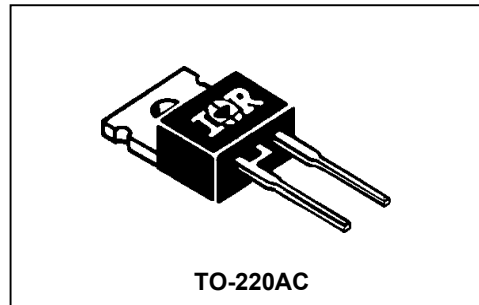

**Major Ratings and Characteristics**

Characteristics	20ETS..	Units
$I_{F(AV)}$ Sinusoidal waveform	20	A
$V_{RRM}$ Range (*)	800 to 1200	V
$I_{FSM}$	300	A
$V_F @ 10A, T_J = 25^\circ C$	1.0	V
$T_J$	-40 to 150	°C

**Package Outline**

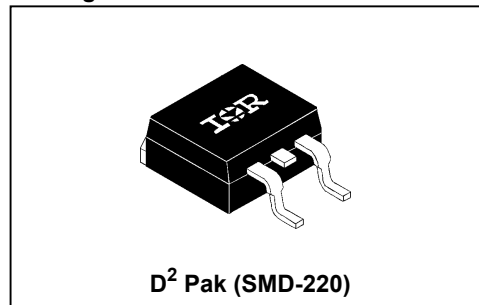

**Output Current in Typical Applications**

	Single-phase Bridge	Three-phase Bridge	Units
Capacitive input filter $T_A = 55^\circ C, T_J = 125^\circ C,$ common heatsink of 1°C/W	16.3	21	A

### Voltage Ratings

Part Number	$V_{RRM}$ , maximum peak reverse voltage V	$V_{RSM}$ , maximum non repetitive peak reverse voltage V	$I_{RRM}$ 150°C mA
20ETS08, 20ETS08S	800	900	1
20ETS12, 20ETS12S	1200	1300	

### Absolute Maximum Ratings

Parameters	20ETS..	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	20	A	@ $T_c = 105^\circ\text{C}$ , 180° conduction half sine wave
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current	250	A	10ms Sine pulse, rated $V_{RRM}$ applied
	300		10ms Sine pulse, no voltage reapplied
$I^2t$ Max. $I^2t$ for fusing	316	$A^2s$	10ms Sine pulse, rated $V_{RRM}$ applied
	442		10ms Sine pulse, no voltage reapplied
$I^2\sqrt{t}$ Max. $I^2\sqrt{t}$ for fusing	4420	$A^2\sqrt{s}$	$t = 0.1$ to 10ms, no voltage reapplied

### Electrical Specifications

Parameters	20ETS..	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop	1.1	V	@ 20A, $T_J = 25^\circ\text{C}$
$r_t$ Forward slope resistance	10.4	mΩ	$T_J = 150^\circ\text{C}$
$V_{F(TO)}$ Threshold voltage	0.85	V	
$I_{RM}$ Max. Reverse Leakage Current	0.1	mA	$T_J = 25^\circ\text{C}$
	1.0		$T_J = 150^\circ\text{C}$

$V_R = \text{rated } V_{RRM}$

### Thermal-Mechanical Specifications

Parameters	20ETS..	Units	Conditions
$T_J$ Max. Junction Temperature Range	-40 to 150	°C	
$T_{stg}$ Max. Storage Temperature Range	-40 to 150	°C	
$R_{thJC}$ Max. Thermal Resistance Junction to Case	1.3	°C/W	DC operation
$R_{thJA}$ Max. Thermal Resistance Junction to Ambient	62	°C/W	(*) For D <sup>2</sup> Pak version
$R_{thCS}$ Typ. Thermal Resistance Case to Heatsink	0.5	°C/W	Mounting surface, smooth and greased
wt Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque	Min. 6 (5)	Kg-cm (lbf-in)	
	Max. 12 (10)		
Case Style	TO-220AC, D <sup>2</sup> Pak (SMD-220)		

\* When mounted on 1" square (650mm<sup>2</sup>) PCB of FR-4 or G-10 material 4 oz (140μm) copper 40°C/W  
For recommended footprint and soldering techniques refer to application note #AN-994

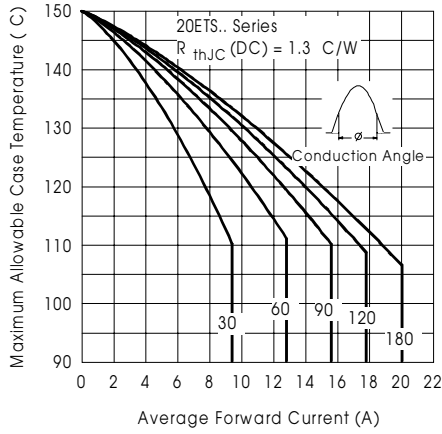


Fig. 1 - Current Rating Characteristics

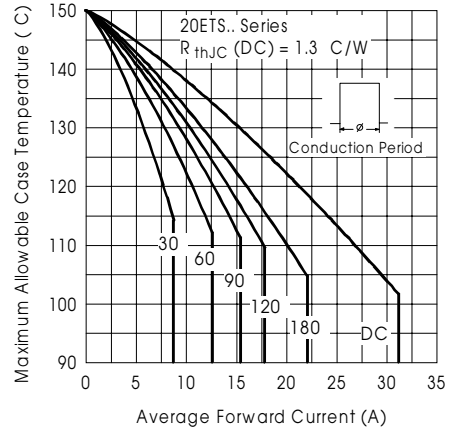


Fig. 2 - Current Rating Characteristics

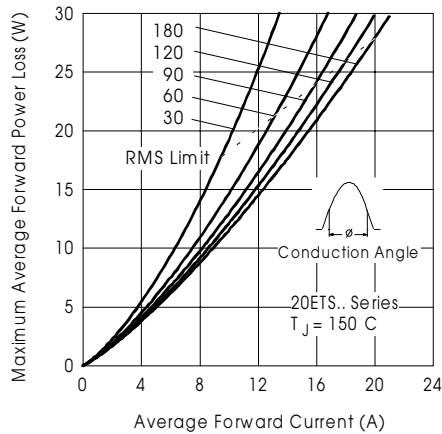


Fig. 3 - Forward Power Loss Characteristics

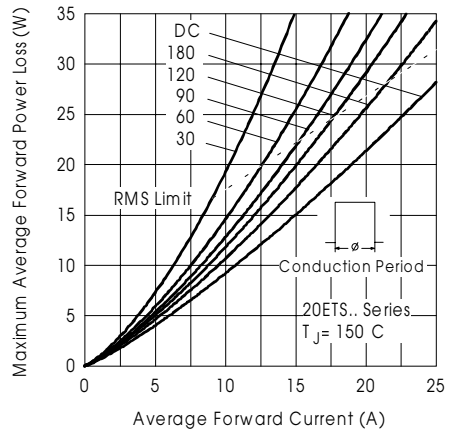


Fig. 4 - Forward Power Loss Characteristics

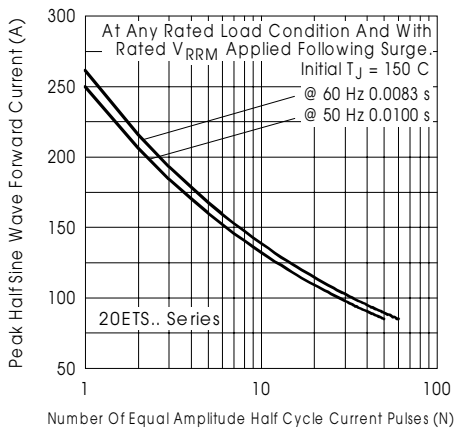


Fig. 5 - Maximum Non-Repetitive Surge Current

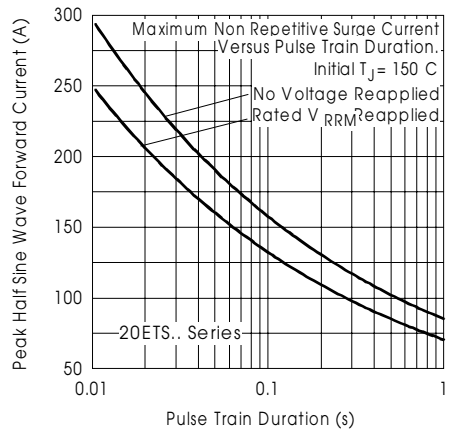


Fig. 6 - Maximum Non-Repetitive Surge Current

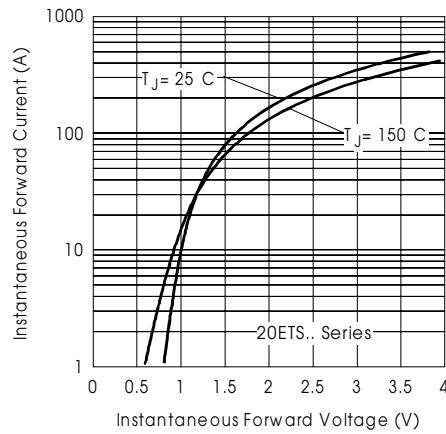


Fig. 7 - Forward Voltage Drop Characteristics




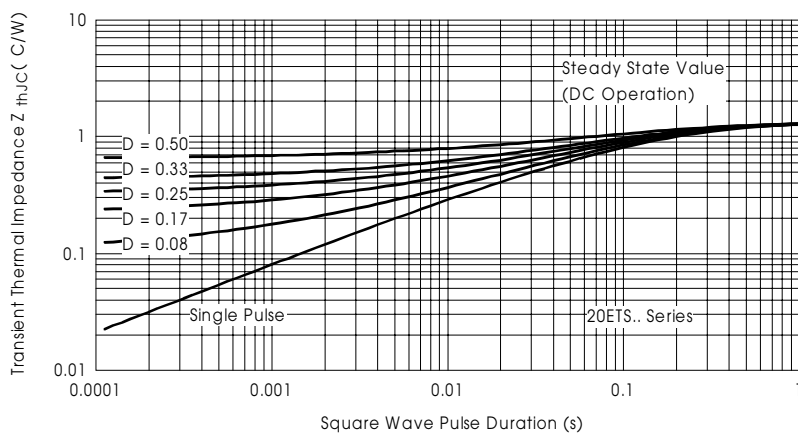


Fig. 8 - Thermal Impedance  $Z_{thjC}$  Characteristics


Outline Table

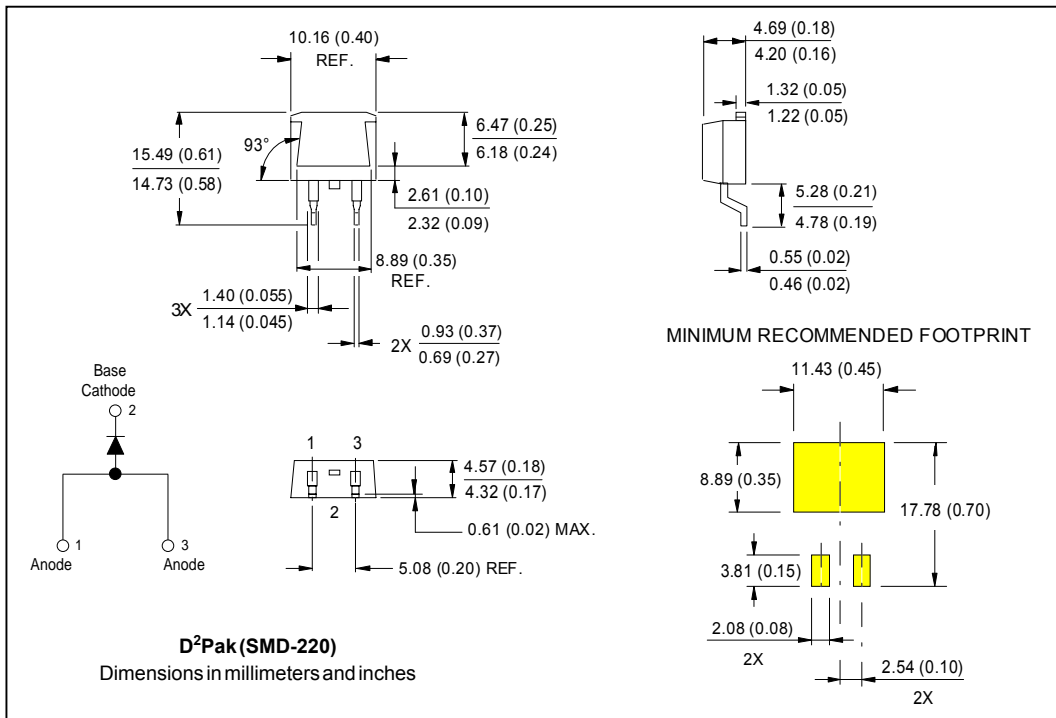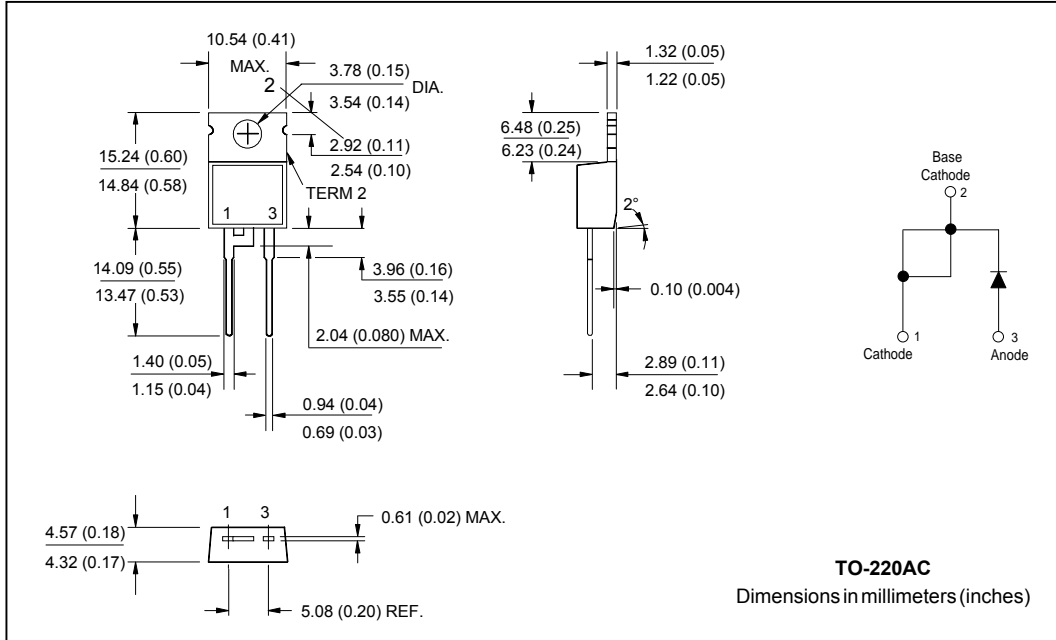

Marking Information

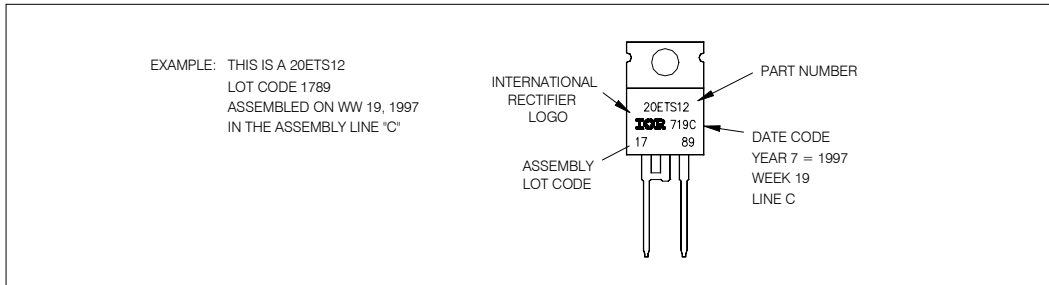

Tape & Reel Information

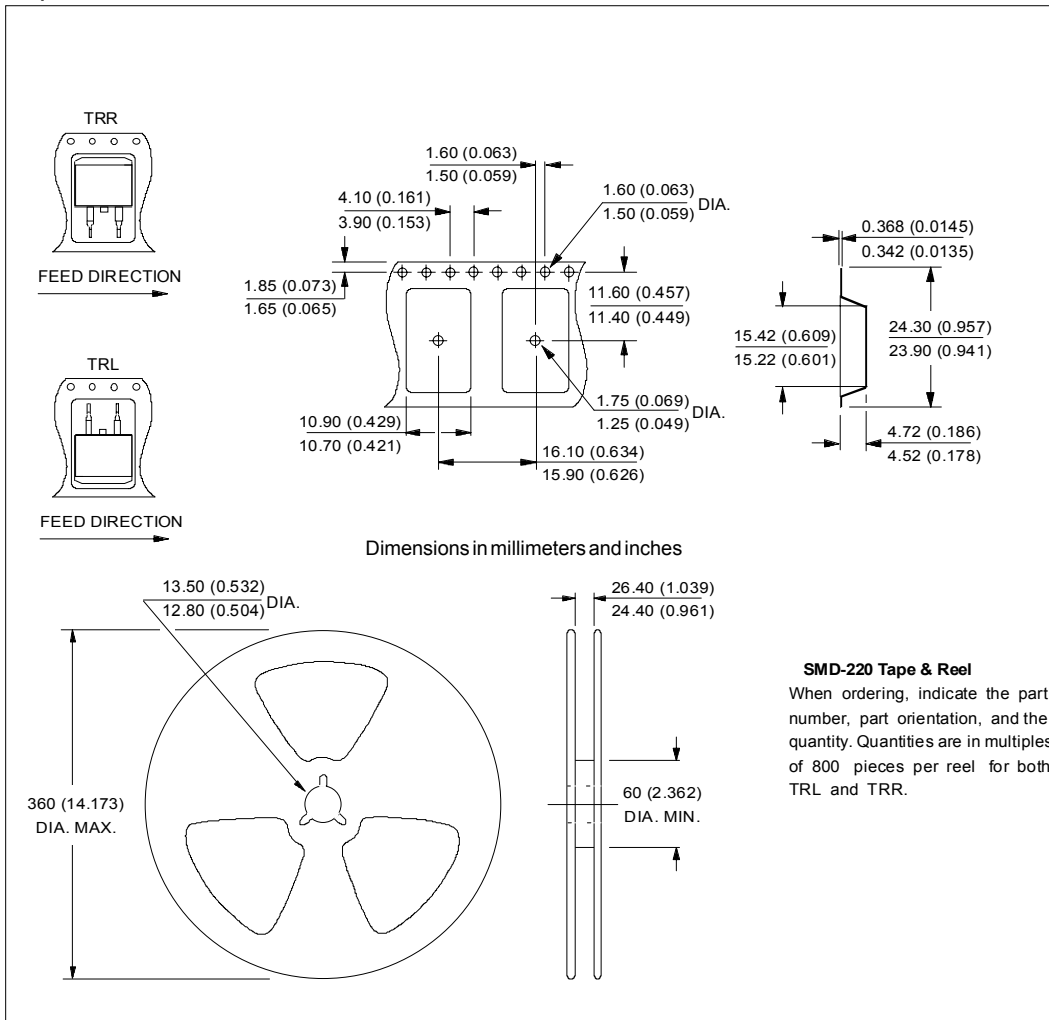

Ordering Information Table

Device Code						
20	E	T	S	12	S	TRL
①	②	③	④	⑤	⑥	⑦
<b>1</b>	- Current Rating					
<b>2</b>	- Circuit Configuration E = Single Diode					
<b>3</b>	- Package T = TO-220AC					
<b>4</b>	- Type of Silicon S = Standard Recovery Rectifier					
<b>5</b>	- Voltage code: Code x 100 = $V_{RRM}$					
<b>6</b>	- S = TO-220 D <sup>2</sup> Pak (SMD-220) Version					
<b>7</b>	- Tape and Reel Option TRL = Left Reel TRR = Right Orientation Reel					

08 = 800V  
 12 = 1200V

Data and specifications subject to change without notice.  
 This product has been designed and qualified for Industrial Level.  
 Qualification Standards can be found on IR's Web site.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.