


BB701S


Tuner Diodes

SOD-323

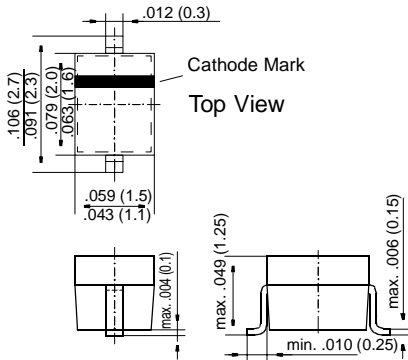

Dimensions in inches and (millimeters)

FEATURES

- ◆ Silicon epitaxial planar capacitance diode for tuning the frequency range of 950 ... 1750 MHz, especially suited for satellite TV tuners. 
- ◆ These diodes are available as singles or as matched sets of two or more units according to the tracking condition described in the table of characteristics.

MECHANICAL DATA

Case: SOD-323 Plastic Package

Weight: approx. 0.004 g

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

	Symbol	Value	Unit
Reverse Voltage	V_R	32	V
Ambient Temperature	T_A	125	°C
Storage Temperature Range	T_S	-55 to +125	°C

BB701S

ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

	Symbol	Min.	Typ.	Max.	Unit
Capacitance at f = 1 MHz at $V_R = 1\text{ V}$ at $V_R = 28\text{ V}$	C_{tot} C_{tot}	8 0.9	– –	9 1.2	pF pF
Effective Capacitance Ratio at $V_R = 1$ to 28 V	$\frac{C_{\text{tot}}(1\text{ V})}{C_{\text{tot}}(28\text{ V})}$	8	–	9	–
Series Resistance at f = 470 MHz, $C_{\text{tot}} = 9\text{ pF}$	r_s	–	–	1.2	Ω
Leakage Current at $V_R = 30\text{ V}$	I_R	–	–	30	nA

For any two of six consecutive diodes in the carrier tape the maximum capacitance deviation in the reverse bias voltage range of $V_R = 1\text{ V}$ to $V_R = 28\text{ V}$ is 2.5%



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.