



**America Semiconductor**

**Silicon Fast Recovery Diode**

**FR6A05 thru  
FR6GR05**

**$V_{RRM} = 50\text{ V} - 1000\text{ V}$**

**$I_F = 6\text{ A}$**


**Features**

- High Surge Capability
- Types up to 1000 V  $V_{RRM}$

**DO-4 Package**

**Note:**

1. Standard polarity: Stud is cathode.
2. Reverse polarity (R): Stud is anode.
3. Stud is base.







**Maximum ratings, at  $T_j = 25\text{ °C}$ , unless otherwise specified ("R" devices have leads reversed)**

Parameter	Symbol	Conditions	FR6A(R)05	FR6B(R)05	FR6D(R)05	FR6G(R)05	Unit
Repetitive peak reverse voltage	$V_{RRM}$		50	100	200	400	V
RMS reverse voltage	$V_{RMS}$		35	70	140	280	V
DC blocking voltage	$V_{DC}$		50	100	200	400	V
Continuous forward current	$I_F$	$T_C \leq 100\text{ °C}$	16	16	16	16	A
Surge non-repetitive forward current, Half Sine Wave	$I_{F,SM}$	$T_C = 25\text{ °C}, t_p = 8.3\text{ ms}$	135	135	135	135	A
Operating temperature	$T_j$		-65 to 150	-65 to 150	-65 to 150	-65 to 150	°C
Storage temperature	$T_{slg}$		-65 to 175	-65 to 175	-65 to 175	-65 to 175	°C

**Electrical characteristics, at  $T_j = 25\text{ °C}$ , unless otherwise specified**

Parameter	Symbol	Conditions	FR6A(R)05	FR6B(R)05	FR6D(R)05	FR6G(R)05	Unit
Diode forward voltage	$V_F$	$I_F = 6\text{ A}, T_j = 25\text{ °C}$	1.4	1.4	1.4	1.4	V
Reverse current	$I_R$	$V_R = 50\text{ V}, T_j = 25\text{ °C}$	25	25	25	25	$\mu\text{A}$
		$V_R = 50\text{ V}, T_j = 150\text{ °C}$	6	6	6	6	mA
<b>Recovery Time</b>							
Maximum reverse recovery time	$T_{RR}$	$I_F = 0.5\text{ A}, I_R = 1.0\text{ A}, I_{RR} = 0.25\text{ A}$	500	500	500	500	nS
<b>Thermal characteristics</b>							
Thermal resistance, junction - case	$R_{thJC}$		2.5	2.5	2.5	2.5	°C/W



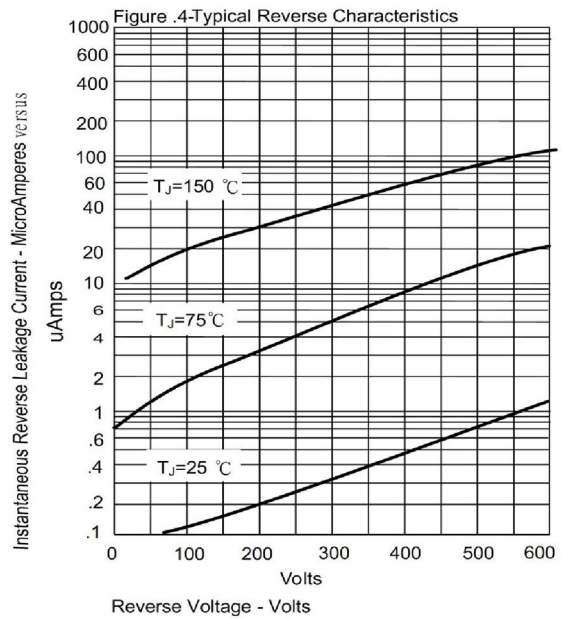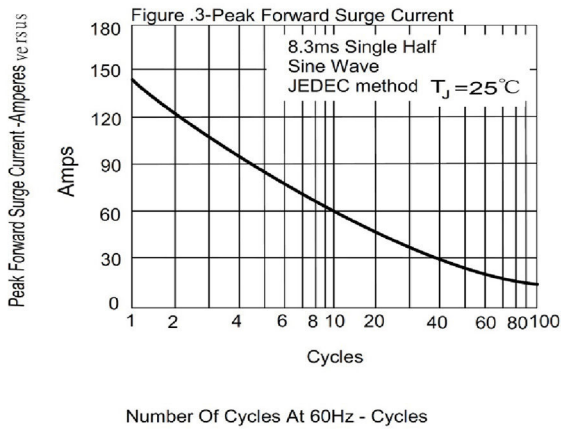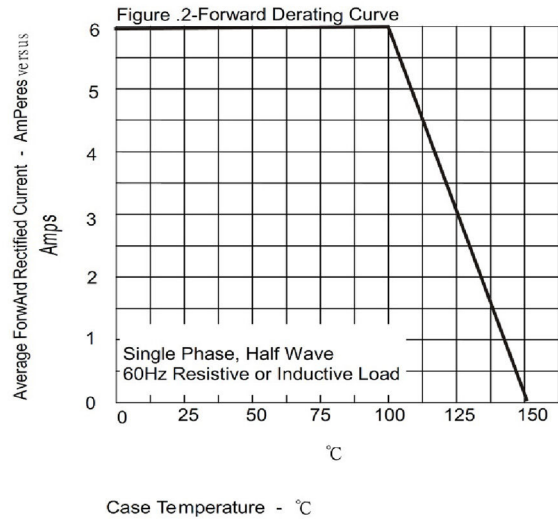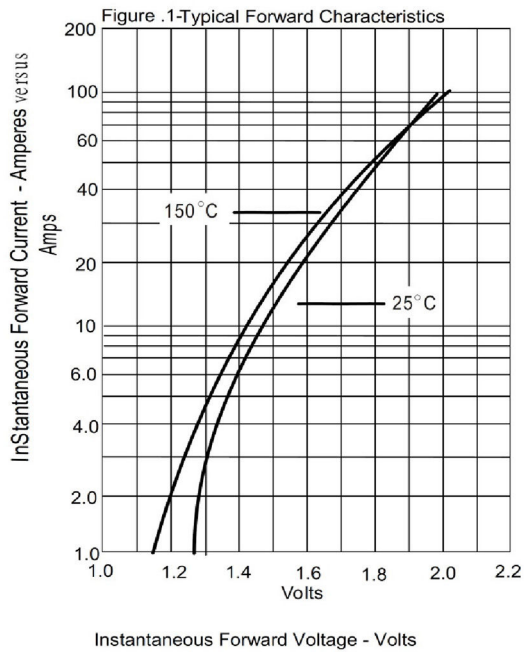



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.