


# DATA SHEET

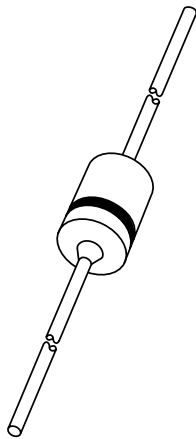

**BB119**

Variable capacitance diode

Product specification  
Supersedes data of April 1992  
File under Discrete Semiconductors, SC01

1996 May 03

## Variable capacitance diode

BB119

## FEATURES

- Hermetically sealed leaded glass SOD27 (DO-35) package
- C10: 17 pF; ratio: 1.3.

## APPLICATIONS

- Automatic frequency control.

## DESCRIPTION

The BB119 is a variable capacitance diode, fabricated in planar technology, and encapsulated in the hermetically sealed leaded glass SOD27 (DO-35) package.

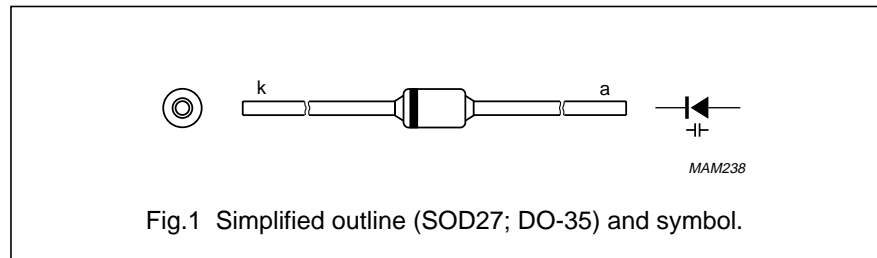


Fig.1 Simplified outline (SOD27; DO-35) and symbol.

## LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
$V_R$	continuous reverse voltage	–	15	V
$I_F$	continuous forward current	–	200	mA
$T_{stg}$	storage temperature	–55	+150	°C
$T_j$	operating junction temperature	–	150	°C

## ELECTRICAL CHARACTERISTICS

$T_j = 25\text{ °C}$ ; unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$I_R$	reverse current	$V_R = 15\text{ V}$ ; see Fig.3	–	–	50	nA
		$V_R = 15\text{ V}$ ; $T_j = 150\text{ °C}$ ; see Fig.3	–	–	2	$\mu\text{A}$
$r_s$	diode series resistance	$f = 200\text{ MHz}$ ; note 1	–	0.2	1.5	$\Omega$
$C_d$	diode capacitance	$V_R = 4\text{ V}$ ; $f = 1\text{ MHz}$ ; see Figs 2 and 4	20	–	25	pF
		$V_R = 10\text{ V}$ ; $f = 1\text{ MHz}$ ; see Figs 2 and 4	–	17	–	pF
$\frac{C_{d(4V)}}{C_{d(10V)}}$	capacitance ratio	$f = 1\text{ MHz}$	1.3	–	–	




## Note

1.  $V_R = 4\text{ V}$ .

Variable capacitance diode

BB119


GRAPHICAL DATA

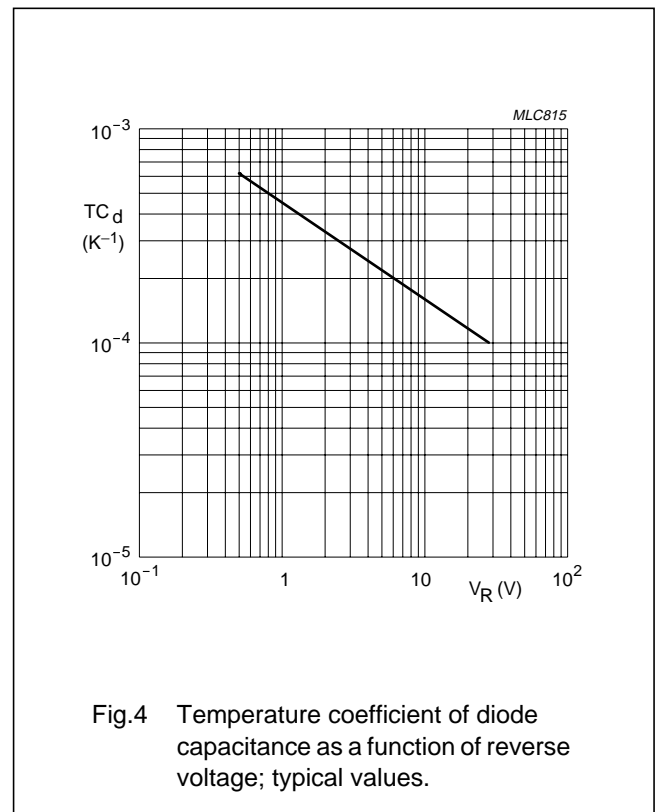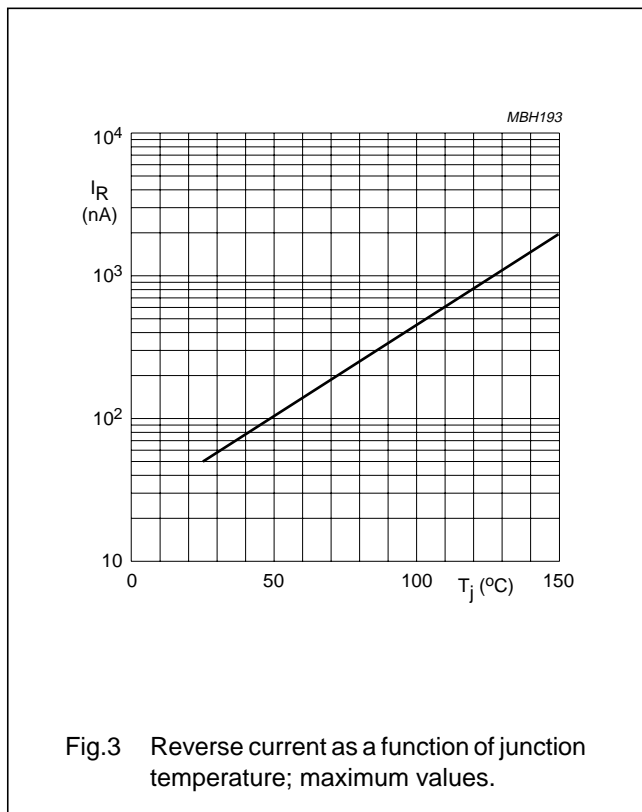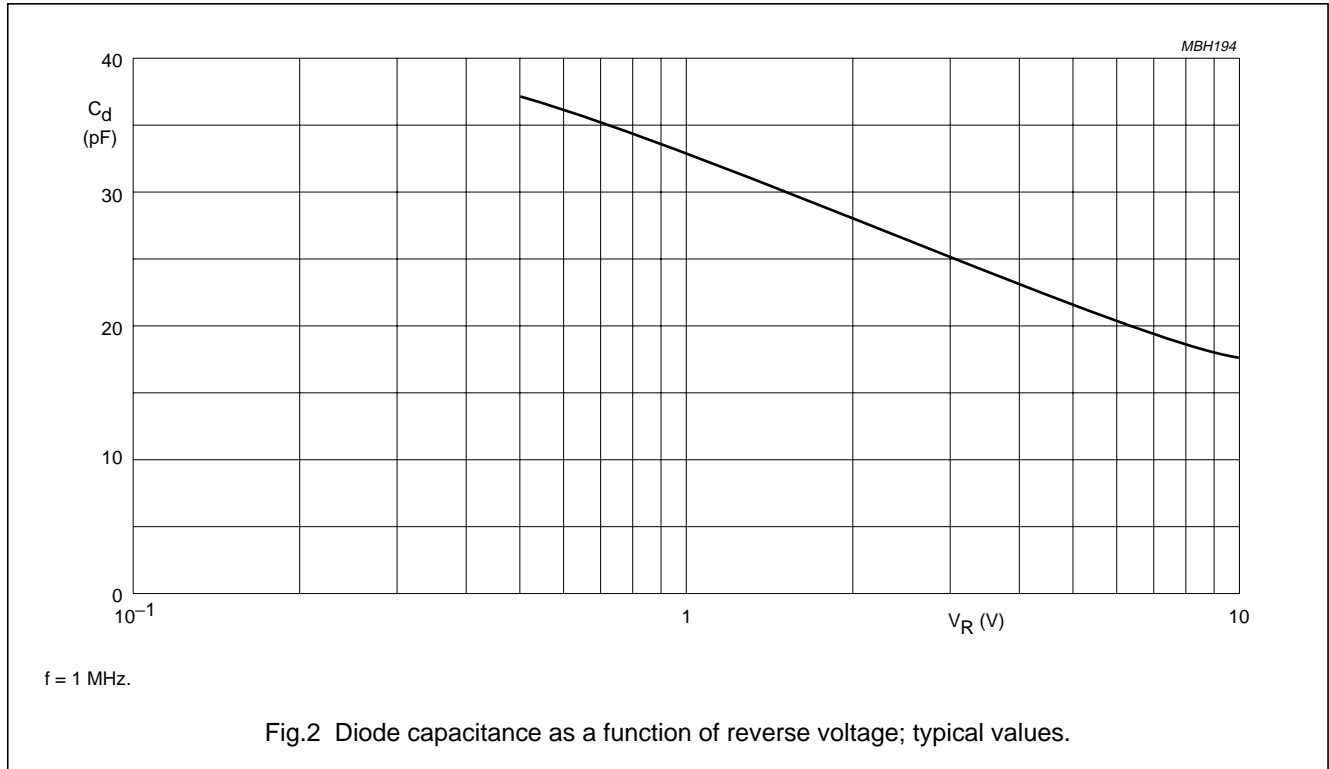

Variable capacitance diode

BB119

PACKAGE OUTLINE

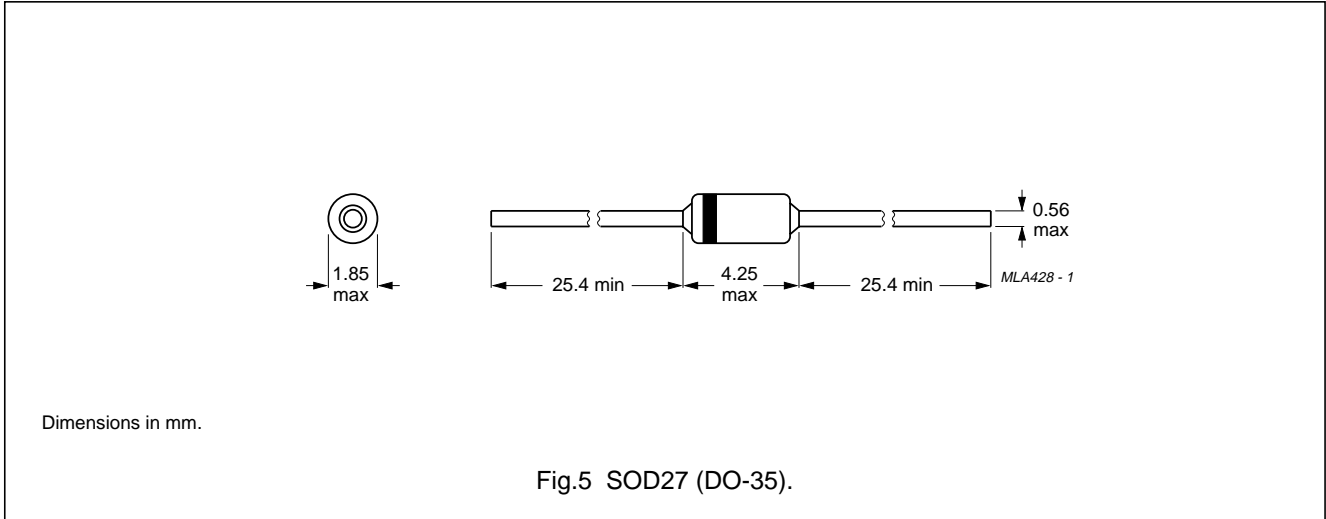

DEFINITIONS

<b>Data sheet status</b>	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
<b>Limiting values</b>	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
<b>Application information</b>	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.