

# DATA SHEET

**74F175A**

Quad D flip-flop

Product specification  
Supersedes data of 1996 Mar 12  
IC15 Data Handbook

2000 Jun 30

Quad D flip-flop

74F175A

FEATURES

- Four edge-triggered D-type flip-flops
- Buffered common clock
- Buffered asynchronous Master Reset
- True and complementary outputs
- Industrial temperature range available (−40°C to +85°C)
- PNP light loading inputs


DESCRIPTION

The 74F175A is a quad, edge-triggered D-type flip-flop with individual D inputs and both Q and  $\bar{Q}$  outputs. The common buffered Clock (CP) and Master Reset ( $\overline{MR}$ ) inputs load and reset (clear) all flip-flops simultaneously.

The register is fully edge-triggered. The state of each D input, one setup time before the Low-to-High clock transition is transferred to the corresponding flip-flop's Q output.

All Q outputs will be forced Low independently of clock or data inputs by a Low voltage level on the  $\overline{MR}$  input. The device is useful for applications where both true and complementary outputs are required, and the CP and  $\overline{MR}$  are common to all storage elements.

PIN CONFIGURATION

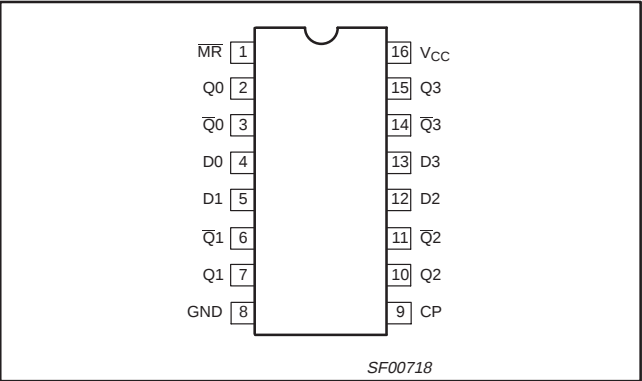

| TYPE    | TYPICAL f <sub>max</sub> | TYPICAL SUPPLY CURRENT (TOTAL) |
|---------|--------------------------|--------------------------------|
| 74F175A | 160MHz                   | 22mA                           |

ORDERING INFORMATION

| DESCRIPTION        | ORDER CODE                                                                        |                                                                                     | PKG. DWG. # |
|--------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------|
|                    | COMMERCIAL RANGE<br>V <sub>CC</sub> = 5V ±10%,<br>T <sub>amb</sub> = 0°C to +70°C | INDUSTRIAL RANGE<br>V <sub>CC</sub> = 5V ±10%,<br>T <sub>amb</sub> = −40°C to +85°C |             |
| 16-pin plastic DIP | N74F175AN                                                                         | I74F175AN                                                                           | SOT38-4     |
| 16-pin plastic SO  | N74F175AD                                                                         | I74F175AD                                                                           | SOT109-1    |

INPUT AND OUTPUT LOADING AND FAN OUT TABLE

| PINS                        | DESCRIPTION                      |         | 74F (U.L.)<br>HIGH/LOW | LOAD VALUE<br>HIGH/LOW |
|-----------------------------|----------------------------------|---------|------------------------|------------------------|
| D0 – D3                     | Data inputs                      | 74F175A | 1.0/0.033              | 20μA/20μA              |
| $\overline{MR}$             | Master reset input (active–Low)  | 74F175A | 1.0/0.033              | 20μA/20μA              |
| CP                          | Clock input (active rising edge) | 74F175A | 1.0/0.033              | 20μA/20μA              |
| Q0–Q3                       | True outputs                     |         | 50/33                  | 1.0mA/20mA             |
| $\bar{Q}0\text{--}\bar{Q}3$ | Complementary outputs            |         | 50/33                  | 1.0mA/20mA             |


NOTE:

One (1.0) FAST unit load is defined as: 20μA in the High state and 0.6mA in the Low state.


Quad D flip-flop

74F175A


LOGIC SYMBOL

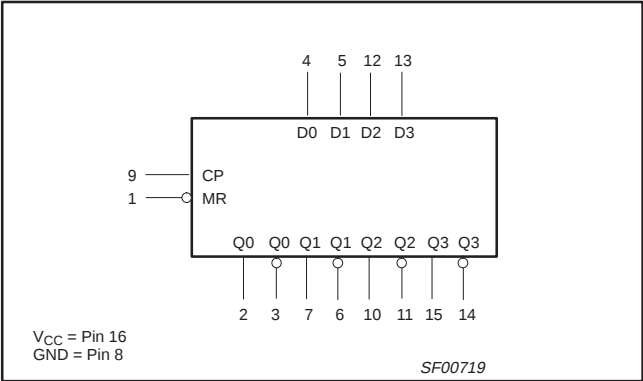

IEC/IEEE SYMBOL

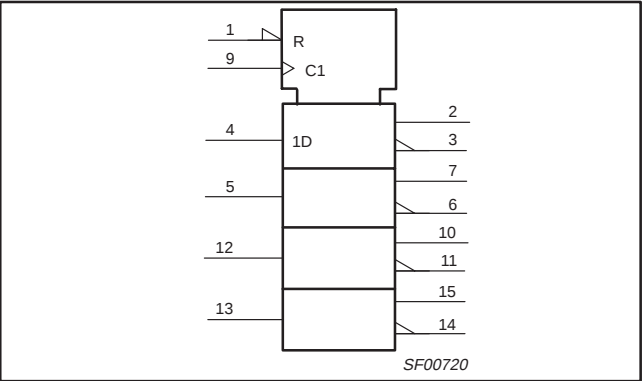

LOGIC DIAGRAM

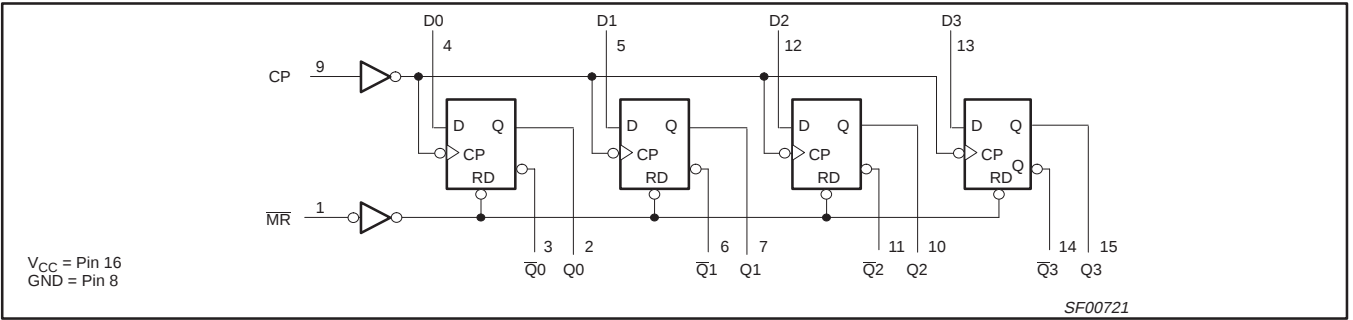

FUNCTION TABLE

| INPUTS |    |                | OUTPUTS        |             | OPERATING MODE |
|--------|----|----------------|----------------|-------------|----------------|
| MR     | CP | D <sub>n</sub> | Q <sub>n</sub> | $\bar{Q}_n$ |                |
| L      | X  | X              | L              | H           | Reset (clear)  |
| H      | ↑  | h              | H              | L           | Load "1"       |
| H      | ↑  | l              | L              | H           | Load "0"       |

H = High voltage level  
h = High state must be present one setup time before the Low-to-High clock transition  
L = Low voltage level  
l = Low state must be present one setup time before the Low-to-High clock transition  
X = Don't care  
↑ = Low-to-High clock transition

ABSOLUTE MAXIMUM RATINGS

(Operation beyond the limit set forth in this table may impair the useful life of the device.  
Unless otherwise noted these limits are over the operating free air temperature range.)

| SYMBOL           | PARAMETER                                      |                  | RATING                  | UNIT |
|------------------|------------------------------------------------|------------------|-------------------------|------|
| V <sub>CC</sub>  | Supply voltage                                 |                  | −0.5 to +7.0            | V    |
| V <sub>IN</sub>  | Input voltage                                  |                  | −0.5 to +7.0            | V    |
| I <sub>IN</sub>  | Input current                                  |                  | −30 to +5               | mA   |
| V <sub>OUT</sub> | Voltage applied to output in High output state |                  | −0.5 to V <sub>CC</sub> | V    |
| I <sub>OUT</sub> | Current applied to output in Low output state  |                  | 40                      | mA   |
| T <sub>amb</sub> | Operating free air temperature range           | Commercial range | 0 to +70                | °C   |
|                  |                                                | Industrial range | −40 to +85              | °C   |
| T <sub>stg</sub> | Storage temperature range                      |                  | −65 to +150             | °C   |

## Quad D flip-flop

74F175A

## RECOMMENDED OPERATING CONDITIONS

| SYMBOL    | PARAMETER                            | LIMITS           |     |     | UNIT |
|-----------|--------------------------------------|------------------|-----|-----|------|
|           |                                      | MIN              | NOM | MAX |      |
| $V_{CC}$  | Supply voltage                       | 4.5              | 5.0 | 5.5 | V    |
| $V_{IH}$  | High-level input voltage             | 2.0              |     |     | V    |
| $V_{IL}$  | Low-level input voltage              |                  |     | 0.8 | V    |
| $I_{IK}$  | Input clamp current                  |                  |     | -18 | mA   |
| $I_{OH}$  | High-level output current            |                  |     | -1  | mA   |
| $I_{OL}$  | Low-level output current             |                  |     | 20  | mA   |
| $T_{amb}$ | Operating free air temperature range | Commercial range | 0   | +70 | °C   |
|           |                                      | Industrial range | -40 | +85 | °C   |

## DC ELECTRICAL CHARACTERISTICS

(Over recommended operating free-air temperature range unless otherwise noted.)

| SYMBOL   | PARAMETER                                 | TEST CONDITIONS <sup>1</sup>                                                         | LIMITS           |                  |      | UNIT |
|----------|-------------------------------------------|--------------------------------------------------------------------------------------|------------------|------------------|------|------|
|          |                                           |                                                                                      | MIN              | TYP <sup>2</sup> | MAX  |      |
| $V_{OH}$ | High-level output voltage                 | $V_{CC} = \text{MIN}, V_{IL} = \text{MAX}, V_{IH} = \text{MIN}, I_{OH} = \text{MAX}$ | $\pm 10\%V_{CC}$ | 2.5              |      | V    |
|          |                                           |                                                                                      | $\pm 5\%V_{CC}$  | 2.7              | 3.4  |      |
| $V_{OL}$ | Low-level output voltage                  | $V_{CC} = \text{MIN}, V_{IL} = \text{MAX}, V_{IH} = \text{MIN}, I_{OL} = \text{MAX}$ | $\pm 10\%V_{CC}$ |                  | 0.30 | V    |
|          |                                           |                                                                                      | $\pm 5\%V_{CC}$  |                  | 0.30 |      |
| $V_{IK}$ | Input clamp voltage                       | $V_{CC} = \text{MIN}, I_I = I_{IK}$                                                  |                  | -0.73            | -1.2 | V    |
| $I_I$    | Input current at maximum input voltage    | $V_{CC} = 0.0V, V_I = 7.0V$                                                          |                  |                  | 100  | μA   |
| $I_{IH}$ | High-level input current                  | $V_{CC} = \text{MAX}, V_I = 2.7V$                                                    |                  |                  | 20   | μA   |
| $I_{IL}$ | Low-level input current                   | $V_{CC} = \text{MAX}, V_I = 0.5V$                                                    |                  |                  | -20  | μA   |
| $I_{OS}$ | Short-circuit output current <sup>3</sup> | $V_{CC} = \text{MAX}$                                                                | -60              |                  | -150 | mA   |
| $I_{CC}$ | Supply current (total)                    | $V_{CC} = \text{MAX}$                                                                |                  | 22               | 31   | mA   |

## Notes to DC electrical characteristics

- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.
- All typical values are at  $V_{CC} = 5V, T_{amb} = 25^\circ\text{C}$ .
- Not more than one output should be shorted at a time. For testing  $I_{OS}$ , the use of high-speed test apparatus and/or sample-and-hold techniques are preferable in order to minimize internal heating and more accurately reflect operational values. Otherwise, prolonged shorting of a high output may raise the chip temperature well above normal and thereby cause invalid readings in other parameter tests. In any sequence of parameter tests,  $I_{OS}$  tests should be performed last.

## AC ELECTRICAL CHARACTERISTICS

| SYMBOL                 | PARAMETER                                        | TEST<br>CONDITION | LIMITS                                                                          |            |            |                                                                                                             |            |                                                                                                               |             |     | UNIT |
|------------------------|--------------------------------------------------|-------------------|---------------------------------------------------------------------------------|------------|------------|-------------------------------------------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------------------------------------|-------------|-----|------|
|                        |                                                  |                   | $T_{amb} = 25^{\circ}C$<br>$V_{CC} = +5V$<br>$C_L = 50pF,$<br>$R_L = 500\Omega$ |            |            | $T_{amb} = 0^{\circ}C$ to $+70^{\circ}C$<br>$V_{CC} = +5.0V \pm 10\%$<br>$C_L = 50pF,$<br>$R_L = 500\Omega$ |            | $T_{amb} = -40^{\circ}C$ to $+85^{\circ}C$<br>$V_{CC} = +5.0V \pm 10\%$<br>$C_L = 50pF,$<br>$R_L = 500\Omega$ |             |     |      |
|                        |                                                  |                   | MIN                                                                             | TYP        | MAX        | MIN                                                                                                         | MAX        | MIN                                                                                                           | MAX         |     |      |
| $f_{max}$              | Maximum clock frequency                          | Waveform 1        | 140                                                                             | 160        |            | 125                                                                                                         |            | 110                                                                                                           |             | MHz |      |
| $t_{PLH}$<br>$t_{PHL}$ | Propagation delay<br>CP to Qn or $\overline{Q}n$ | Waveform 1        | 3.0<br>4.5                                                                      | 4.0<br>6.0 | 6.5<br>8.5 | 2.5<br>4.0                                                                                                  | 7.5<br>9.0 | 2.5<br>4.0                                                                                                    | 8.0<br>10.0 | ns  |      |
| $t_{PLH}$<br>$t_{PHL}$ | Propagation delay<br>MR to Qn                    | Waveform 3        | 4.5                                                                             | 6.5        | 9.0        | 4.5                                                                                                         | 10.0       | 4.5                                                                                                           | 11.0        | ns  |      |
| $t_{PHL}$<br>$t_{PHL}$ | Propagation delay<br>MR to $\overline{Q}n$       | Waveform 3        | 4.5                                                                             | 6.0        | 8.0        | 4.0                                                                                                         | 9.0        | 4.0                                                                                                           | 10.0        | ns  |      |

Quad D flip-flop


74F175A

AC SETUP REQUIREMENTS


| SYMBOL                                   | PARAMETER                                     | TEST<br>CONDITION | LIMITS                                                                                              |     |     |                                                                                                                     |     |                                                                                                                       |     |    | UNIT |
|------------------------------------------|-----------------------------------------------|-------------------|-----------------------------------------------------------------------------------------------------|-----|-----|---------------------------------------------------------------------------------------------------------------------|-----|-----------------------------------------------------------------------------------------------------------------------|-----|----|------|
|                                          |                                               |                   | T <sub>amb</sub> = 25°C<br>V <sub>CC</sub> = +5V<br>C <sub>L</sub> = 50pF,<br>R <sub>L</sub> = 500Ω |     |     | T <sub>amb</sub> = 0°C to +70°C<br>V <sub>CC</sub> = +5.0V ± 10%<br>C <sub>L</sub> = 50pF,<br>R <sub>L</sub> = 500Ω |     | T <sub>amb</sub> = −40°C to +85°C<br>V <sub>CC</sub> = +5.0V ± 10%<br>C <sub>L</sub> = 50pF,<br>R <sub>L</sub> = 500Ω |     |    |      |
|                                          |                                               |                   | MIN                                                                                                 | TYP | MAX | MIN                                                                                                                 | MAX | MIN                                                                                                                   | MAX |    |      |
|                                          |                                               |                   |                                                                                                     |     |     |                                                                                                                     |     |                                                                                                                       |     |    |      |
| t <sub>s</sub> (H)<br>t <sub>s</sub> (L) | Setup time, High or Low<br>Dn to CP           | Waveform 2        | 3.0<br>3.0                                                                                          |     |     | 3.5<br>3.5                                                                                                          |     | 4.0<br>4.0                                                                                                            |     | ns |      |
| t <sub>h</sub> (H)<br>t <sub>h</sub> (L) | Hold time, High or Low<br>Dn to CP            | Waveform 2        | 0.0<br>0.0                                                                                          |     |     | 0.0<br>0.0                                                                                                          |     | 0.0<br>0.0                                                                                                            |     | ns |      |
| t <sub>w</sub> (H)<br>t <sub>w</sub> (L) | CP Pulse width<br>High or Low                 | Waveform 1        | 3.0<br>4.0                                                                                          |     |     | 3.5<br>5.0                                                                                                          |     | 4.0<br>5.5                                                                                                            |     | ns |      |
| t <sub>w</sub> (L)                       | $\overline{\text{MR}}$ Pulse width<br>Low     | Waveform 3        | 3.5                                                                                                 |     |     | 3.5                                                                                                                 |     | 4.0                                                                                                                   |     | ns |      |
| t <sub>REC</sub>                         | Recovery time<br>$\overline{\text{MR}}$ to CP | Waveform 3        | 4.0                                                                                                 |     |     | 4.5                                                                                                                 |     | 5.0                                                                                                                   |     | ns |      |

AC WAVEFORMS


For all waveforms, V<sub>M</sub> = 1.3V.

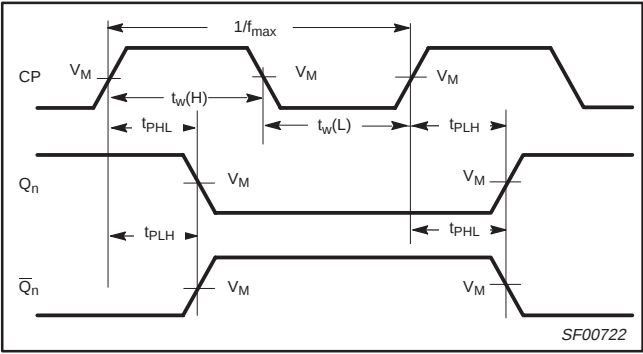

Waveform 1. Propagation delay for clock input to output, clock pulse width, and maximum clock frequency

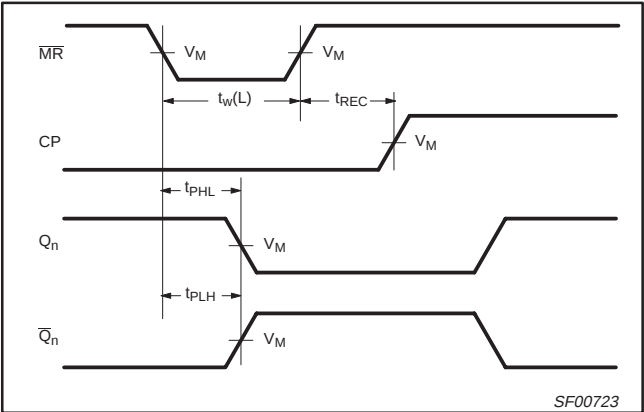

Waveform 3. Master Reset pulse width, Master Reset to output delay and Master Reset to Clock recovery time

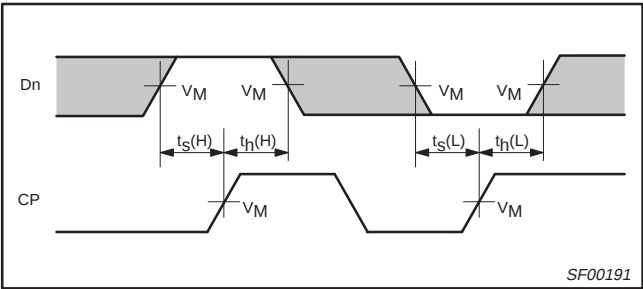


Waveform 2. Data setup time and hold times

Quad D flip-flop

74F175A

TEST CIRCUIT AND WAVEFORMS

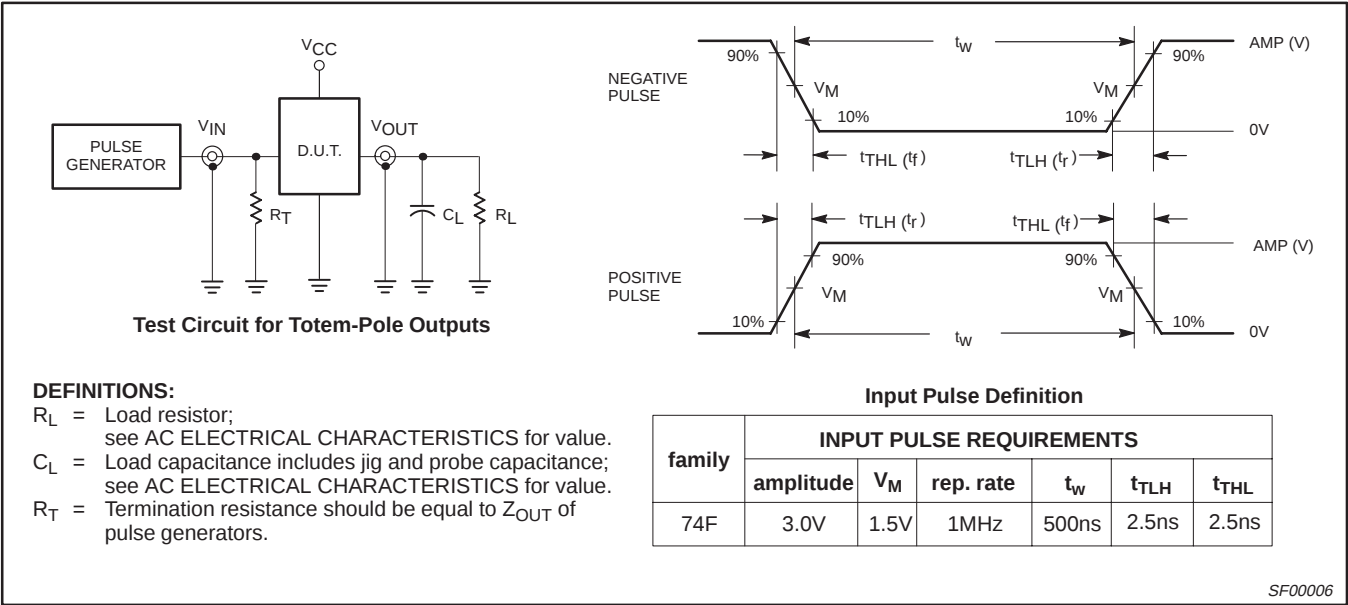


Quad D flip-flop

74F175A

DIP16: plastic dual in-line package; 16 leads (300 mil)

SOT38-4

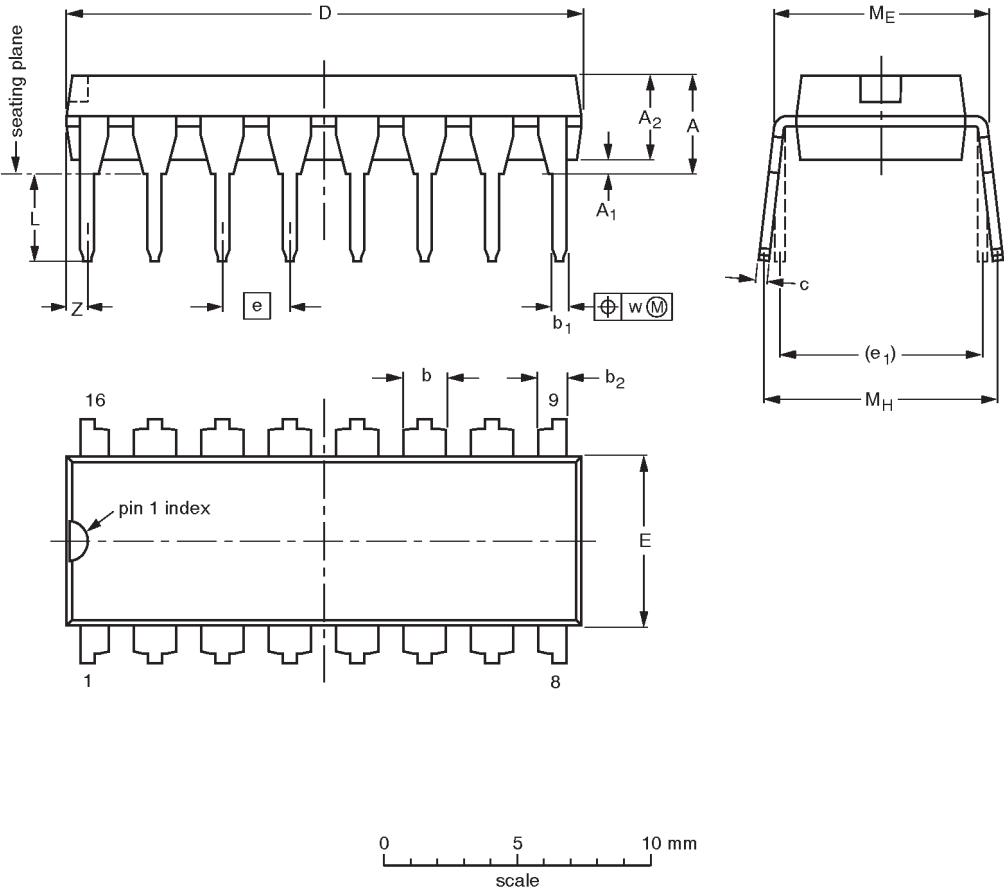

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

| UNIT   | A<br>max. | A <sub>1</sub><br>min. | A <sub>2</sub><br>max. | b              | b <sub>1</sub> | b <sub>2</sub> | c              | D <sup>(1)</sup> | E <sup>(1)</sup> | e    | e <sub>1</sub> | L            | M <sub>E</sub> | M <sub>H</sub> | w     | Z <sup>(1)</sup><br>max. |
|--------|-----------|------------------------|------------------------|----------------|----------------|----------------|----------------|------------------|------------------|------|----------------|--------------|----------------|----------------|-------|--------------------------|
| mm     | 4.2       | 0.51                   | 3.2                    | 1.73<br>1.30   | 0.53<br>0.38   | 1.25<br>0.85   | 0.36<br>0.23   | 19.50<br>18.55   | 6.48<br>6.20     | 2.54 | 7.62           | 3.60<br>3.05 | 8.25<br>7.80   | 10.0<br>8.3    | 0.254 | 0.76                     |
| inches | 0.17      | 0.020                  | 0.13                   | 0.068<br>0.051 | 0.021<br>0.015 | 0.049<br>0.033 | 0.014<br>0.009 | 0.77<br>0.73     | 0.26<br>0.24     | 0.10 | 0.30           | 0.14<br>0.12 | 0.32<br>0.31   | 0.39<br>0.33   | 0.01  | 0.030                    |

Note

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.


| OUTLINE<br>VERSION | REFERENCES |       |      |  | EUROPEAN<br>PROJECTION                                                                | ISSUE DATE           |
|--------------------|------------|-------|------|--|---------------------------------------------------------------------------------------|----------------------|
|                    | IEC        | JEDEC | EIAJ |  |                                                                                       |                      |
| SOT38-4            |            |       |      |  |  | 92-11-17<br>95-01-14 |

Quad D flip-flop

74F175A

SO16: plastic small outline package; 16 leads; body width 3.9 mm

SOT109-1

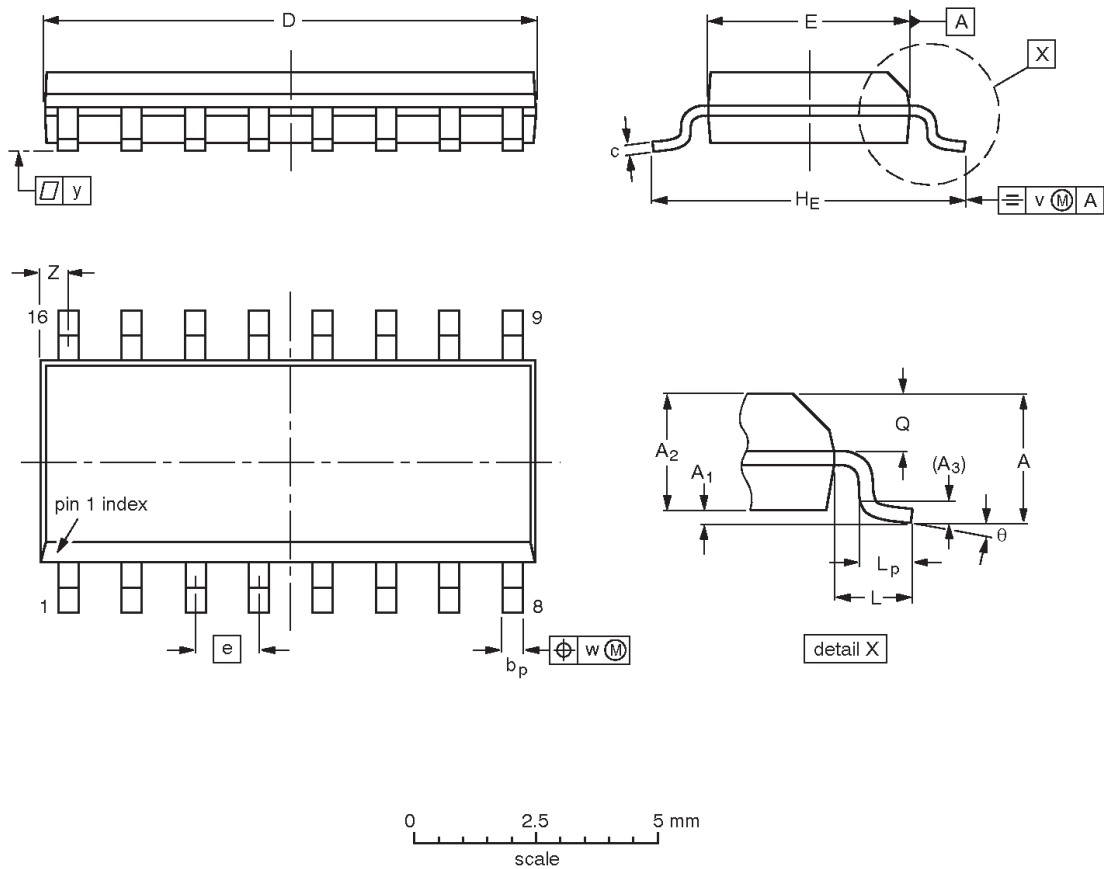

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

| UNIT   | A<br>max. | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | b <sub>p</sub> | c                | D <sup>(1)</sup> | E <sup>(1)</sup> | e     | H <sub>E</sub> | L     | L <sub>p</sub> | Q              | v    | w    | y     | Z <sup>(1)</sup> | θ        |
|--------|-----------|----------------|----------------|----------------|----------------|------------------|------------------|------------------|-------|----------------|-------|----------------|----------------|------|------|-------|------------------|----------|
| mm     | 1.75      | 0.25<br>0.10   | 1.45<br>1.25   | 0.25           | 0.49<br>0.36   | 0.25<br>0.19     | 10.0<br>9.8      | 4.0<br>3.8       | 1.27  | 6.2<br>5.8     | 1.05  | 1.0<br>0.4     | 0.7<br>0.6     | 0.25 | 0.25 | 0.1   | 0.7<br>0.3       | 8°<br>0° |
| inches | 0.069     | 0.010<br>0.004 | 0.057<br>0.049 | 0.01           | 0.019<br>0.014 | 0.0100<br>0.0075 | 0.39<br>0.38     | 0.16<br>0.15     | 0.050 | 0.244<br>0.228 | 0.041 | 0.039<br>0.016 | 0.028<br>0.020 | 0.01 | 0.01 | 0.004 | 0.028<br>0.012   |          |

Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

| OUTLINE<br>VERSION | REFERENCES |          |      |  | EUROPEAN<br>PROJECTION | ISSUE DATE           |
|--------------------|------------|----------|------|--|------------------------|----------------------|
|                    | IEC        | JEDEC    | EIAJ |  |                        |                      |
| SOT109-1           | 076E07S    | MS-012AC |      |  |                        | 95-01-23<br>97-05-22 |

|                  |         |
|------------------|---------|
| Quad D flip-flop | 74F175A |
|------------------|---------|

NOTES

## Quad D flip-flop

74F175A

## Data sheet status

| Data sheet status         | Product status | Definition [1]                                                                                                                                                                                                                                             |
|---------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Objective specification   | Development    | This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice.                                                                                                          |
| Preliminary specification | Qualification  | This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product. |
| Product specification     | Production     | This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.                                                       |

[1] Please consult the most recently issued datasheet before initiating or completing a design.

## Definitions

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## Disclaimers

**Life support** — These products are not designed for use in life support appliances, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors  
811 East Arques Avenue  
P.O. Box 3409  
Sunnyvale, California 94088-3409  
Telephone 800-234-7381

© Copyright Philips Electronics North America Corporation 2000  
All rights reserved. Printed in U.S.A.

Date of release: 06-00

Document order number:

9397-750 07531

*Let's make things better.*



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.