


MECHANICAL DATA

Dimensions in mm

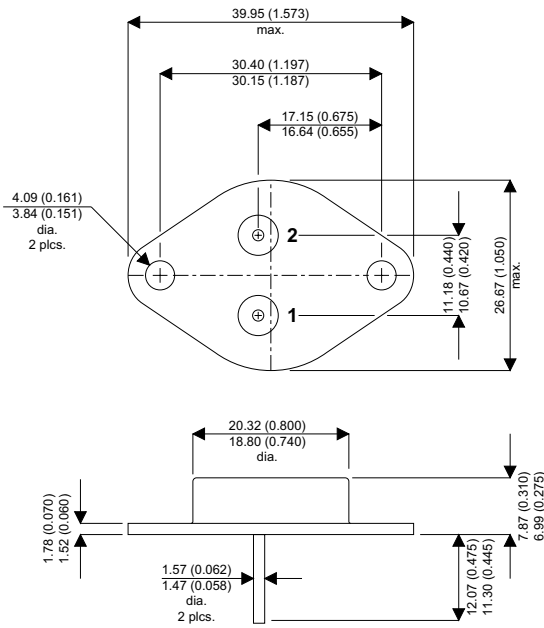

TO3B

Pin 1 – Base Pin 2 – Emitter Case – Collector

NPN MULTI-EPITAXIAL TRANSISTOR

FEATURES

- LOW $V_{CE(SAT)}$
- FAST SWITCHING
- SINGLE CHIP CONSTRUCTION
- HIGH SWITCHING CURRENTS
- HIGH RELIABILITY
- MILITARY OPTIONS AVAILABLE

APPLICATIONS

- SWITCHING REGULATORS
- MOTOR DRIVE CONTROL
- HIGH POWER CONVERTORS

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

V_{CEX}	Collector – Emitter Voltage ($V_{BE} = -1.5V$)	500V
V_{CEO}	Collector – Emitter Voltage ($I_B = 0$)	275V
V_{EBO}	Emitter – Base Voltage	10V
I_C	Collector Current	50A
$I_{C(PK)}$	Peak Collector Current	70A
P_{tot}	Total Dissipation at $T_{case} = 25^{\circ}C$	300W
T_{stg}	Storage Temperature	-55 to 200°C
T_J	Maximum Operating Junction Temperature	200°C
R_{th}	Thermal Resistance (junction-case)	Max. 0.58°C/W

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CEX} Collector Cut-Off Current	$V_{BE} = 1.5V$ $V_{CEX} = 500V$			0.1	mA
	$T_C = 150^{\circ}C$			5	
I_{EBO} Emitter Cut-Off Current	$V_{BE} = 8V$			0.1	mA
$V_{CE(sat)}$ Collector – Emitter Saturation Voltage	$I_C = 20A$ $I_B = 2A$		0.4	0.6	V
	$I_C = 40A$ $I_B = 5.5A$		0.8	1.0	
$V_{BE(sat)}$ Base – Emitter Saturation Voltage	$I_C = 20A$ $I_B = 2A$		1.0	1.2	V
	$I_C = 40A$ $I_B = 4A$		1.1	1.3	
h_{FE} DC Current Gain	$I_C = 16A$ $V_{CE} = 4V$	20	35		—
	$I_C = 35A$ $V_{CE} = 4V$	10	20		

SWITCHING CHARACTERISTICS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

t_s Storage Time	$I_C = 20A$ $V_{CC} = 200V$			1.8	μs
t_f Fall Time	$I_{B1} = -I_{B2} = 10A$			0.35	

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.