


Central
Semiconductor Corp.

**Central
Semiconductor Corp.**
**Central™
Semiconductor Corp.**

145 Adams Avenue
Hauppauge, New York 11788



CQ3P-25B
CQ3P-25D
CQ3P-25M
CQ3P-25N

ISOLATED 30 AMP TRIAC
200 THRU 800 VOLTS

TO-3P CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR CQ3P-25B series types are Epoxy Molded Silicon Triacs mounted on an isolated TO-3 metal platform, designed for full wave AC control applications featuring gate triggering in all four (4) quadrants.

MAXIMUM RATINGS (T_C = 25°C unless otherwise noted)


	SYMBOL	CQ3P -25B	CQ3P -25D	CQ3P -25M	CQ3P -25N	UNITS
Peak Repetitive Off-State Voltage	V _{DRM}	200	400	600	800	V
RMS On-State Current (T _C = 90°C)	I _{T(RMS)}			30		A
Peak One Cycle Surge (t = 10ms)	I _{TSM}			250		A
I ² t Value for Fusing (t = 10ms)	I ² t			312.5		A ² s
Peak Gate Power (tp = 10μs)	P _{GM}			40		W
Average Gate Power Dissipation	P _{G(AV)}			1.0		W
Peak Gate Current (tp = 10μs)	I _{GM}			10		A
Peak Gate Voltage (tp = 10μs)	V _{GM}			16		V
Critical Rate of Rise of On-State Current						
Repetitive (F = 50Hz)	di/dt			10		A/μs
Storage Temperature	T _{stg}		-40 to +150			°C
Junction Temperature	T _J		-40 to +125			°C
Thermal Resistance	θ _{J-C}			1.5		°C/W
Isolation Voltage	V _{ISO}			2500		V(RMS)

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I _{DRM}	Rated V _{DRM}			0.01	mA
I _{DRM}	Rated V _{DRM} , T _C = 125°C			6.00	mA
I _{GT}	V _D = 12V, R _L = 33Ω, QUAD I,II,III			50	mA
I _{GT}	V _D = 12V, R _L = 33Ω, QUAD IV			100	mA
I _H	I _T = 500mA			80	mA
V _{GT}	V _D = 12V, R _L = 33Ω, QUAD I,II,III,IV			1.50	V
V _{TM}	I _{TM} = 42A, tp = 10ms			1.80	V
dv/dt	V _D = 2/3 V _{DRM} , R _{GK} = ∞, T _C = 125°C	250			V/μs

CQ3P-25B SERIES RATING AND CHARACTERISTIC CURVES


RMS ON-STATE CURRENT vs. CASE TEMPERATURE

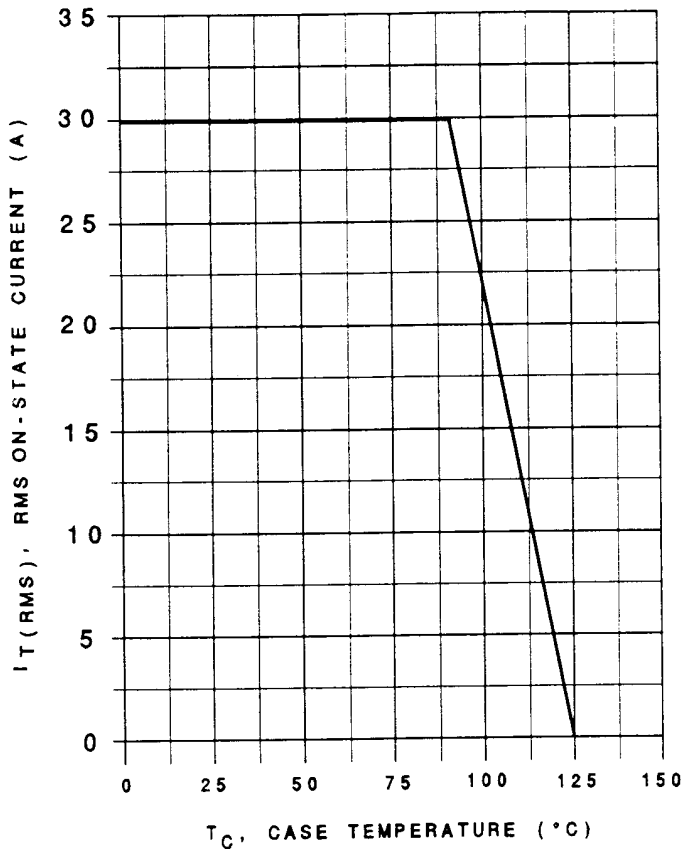

MAXIMUM ON-STATE CHARACTERISTICS

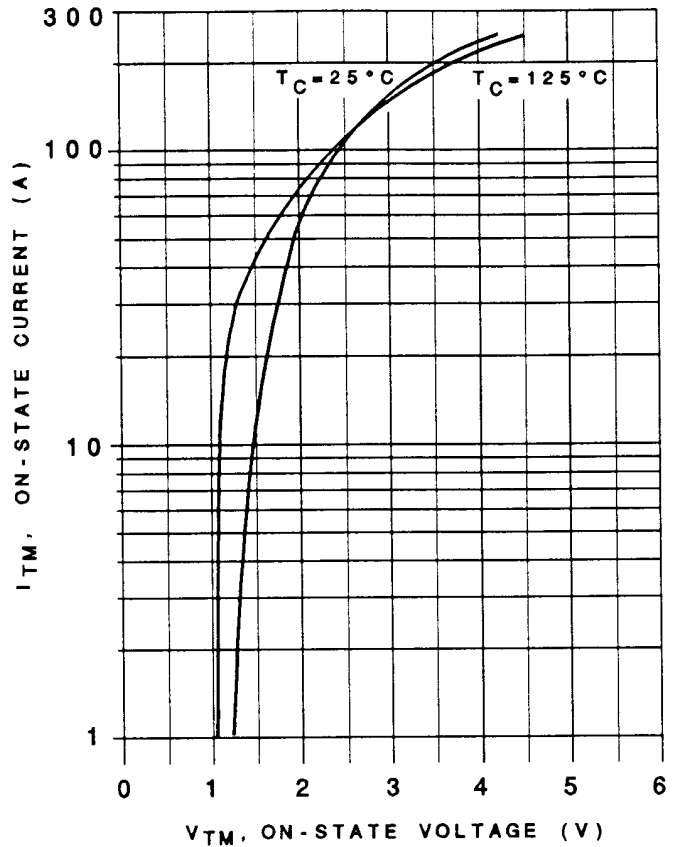

MECHANICAL OUTLINE

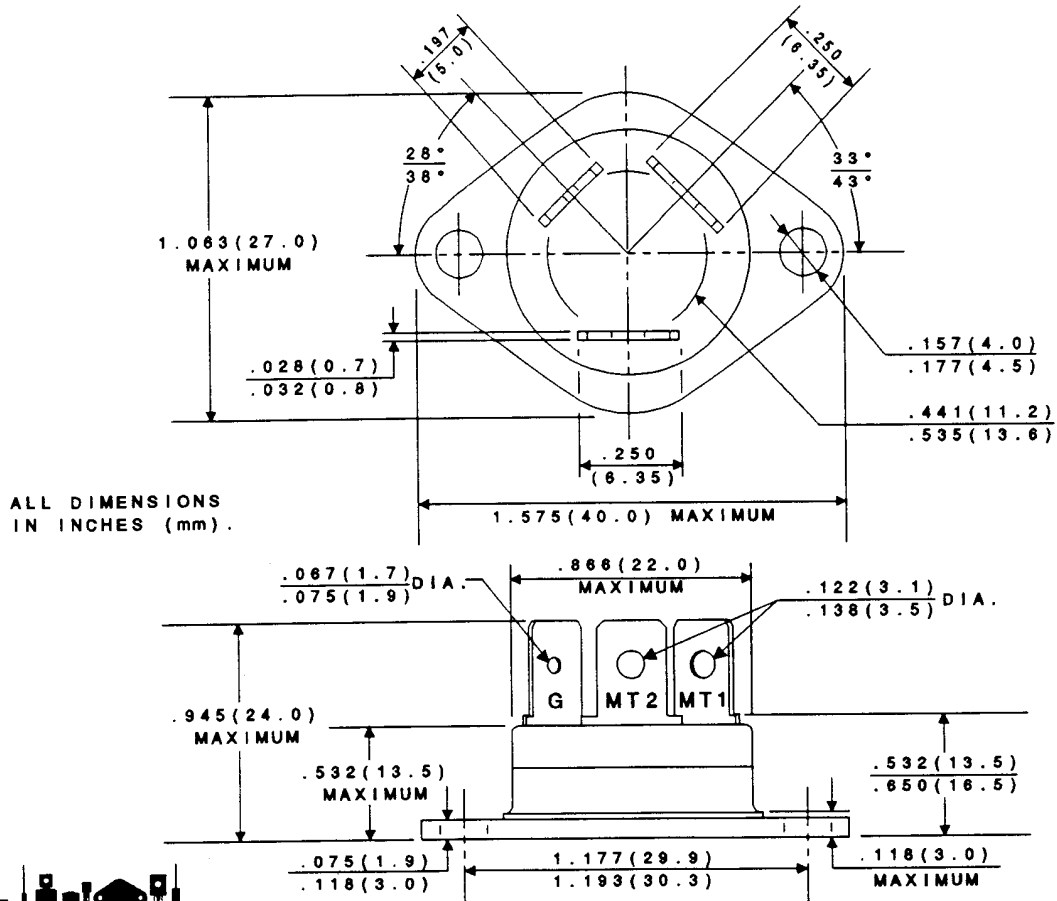



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.