


CJD340 NPN
CJD350 PNP

**COMPLEMENTARY SILICON
POWER TRANSISTOR**

DPAK
POWER!



DPAK TRANSISTOR CASE

Central™

Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CJD340, CJD350 types are Complementary Silicon Power Transistors manufactured in a surface mount package designed for high voltage general purpose applications.

MARKING CODE: FULL PART NUMBER

MAXIMUM RATINGS: ($T_C=25^\circ\text{C}$ unless otherwise noted)



	SYMBOL		UNITS
Collector-Base Voltage	V_{CBO}	300	V
Collector-Emitter Voltage	V_{CEO}	300	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Continuous Collector Current	I_C	500	mA
Peak Collector Current	I_{CM}	750	mA
Power Dissipation	P_D	15	W
Power Dissipation ($T_A=25^\circ\text{C}$)	P_D	1.56	W
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150	$^\circ\text{C}$
Thermal Resistance	θ_{JC}	8.33	$^\circ\text{C/W}$
Thermal Resistance	θ_{JA}	80.1	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_{CBO}	$V_{CE}=300\text{V}$		100	μA
I_{EBO}	$V_{EB}=3.0\text{V}$		100	μA
BV_{CEO}	$I_C=1.0\text{mA}$	300		V
h_{FE}	$V_{CE}=10\text{V}, I_C=50\text{mA}$	30	240	

**COMPLEMENTARY SILICON
POWER TRANSISTOR**

DPAK TRANSISTOR CASE - MECHANICAL OUTLINE

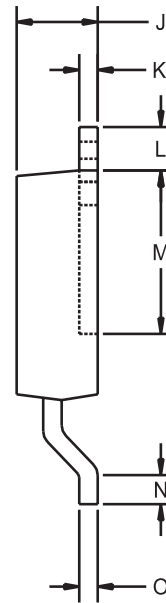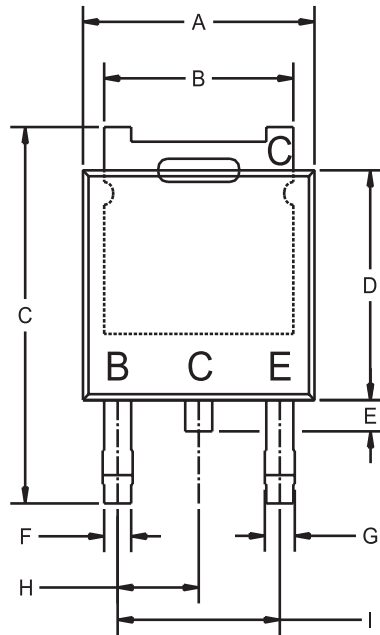

R1

LEAD CODE:

- B) BASE
- C) COLLECTOR
- E) EMITTER
- C) COLLECTOR

MARKING CODE:

FULL PART NUMBER

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.250	0.265	6.35	6.73
B	0.205	0.215	5.21	5.46
C	0.374	0.409	9.50	10.40
D	0.235	0.245	5.97	6.22
E	0.025	0.040	0.64	1.02
F	0.025	0.035	0.64	0.88
G	0.030	0.045	0.76	1.14
H	0.090		2.28	
I	0.180		4.57	
J	0.086	0.094	2.19	2.38
K	0.018	0.023	0.46	0.58
L	0.040	0.050	1.02	1.27
M	0.170	-	4.32	-
N	0.020	-	0.51	-
O	0.018	0.023	0.46	0.58

DPAK TRANSISTOR (REV: R1)

R1 (26-September 2002)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.