


CZT3150
SURFACE MOUNT
NPN SILICON POWER TRANSISTOR

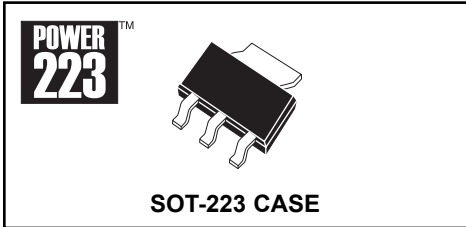

CentralTM

Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CZT3150 type is a NPN Silicon Power Transistor manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for high current, high gain, fast switching applications.

MARKING CODE: FULL PART NUMBER

MAXIMUM RATINGS: (T_A=25°C)


			UNITS
Collector-Base Voltage	V _{CB0}	50	V
Collector-Emitter Voltage	V _{CEO}	25	V
Emitter-Base Voltage	V _{EBO}	7.0	V
Collector Current	I _C	5.0	A
Base Current	I _B	1.0	A
Power Dissipation	P _D	2.0	W
Operating and Storage Junction Temperature	T _J , T _{stg}	-65 to +150	°C
Thermal Resistance	θ _{JA}	62.5	°C/W

ELECTRICAL CHARACTERISTICS: (T_A=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I _{CBO}	V _{CB} =50V			1.0	μA
I _{EBO}	V _{EB} =7.0V			1.0	μA
BV _{CEO}	I _C =10mA	25			V
V _{CE(SAT)}	I _C =3.0A, I _B =150mA			0.35	V
V _{CE(SAT)}	I _C =4.0A, I _B =200mA			0.50	V
V _{BE(SAT)}	I _C =3.0A, I _B =150mA			1.10	V
V _{BE(SAT)}	I _C =4.0A, I _B =200mA			1.40	V
h _{FE}	V _{CE} =2.0V, I _C =500mA	250		550	
h _{FE}	V _{CE} =2.0V, I _C =2.0A	150			
h _{FE}	V _{CE} =2.0V, I _C =5.0A	50			
f _T	V _{CE} =6.0V, I _C =50mA, f=200MHz		150		MHz
C _{ob}	V _{CB} =10V, I _E =0, f=1.0MHz			50	pF

R4 (17-June 2004)

SOT-223 CASE - MECHANICAL OUTLINE

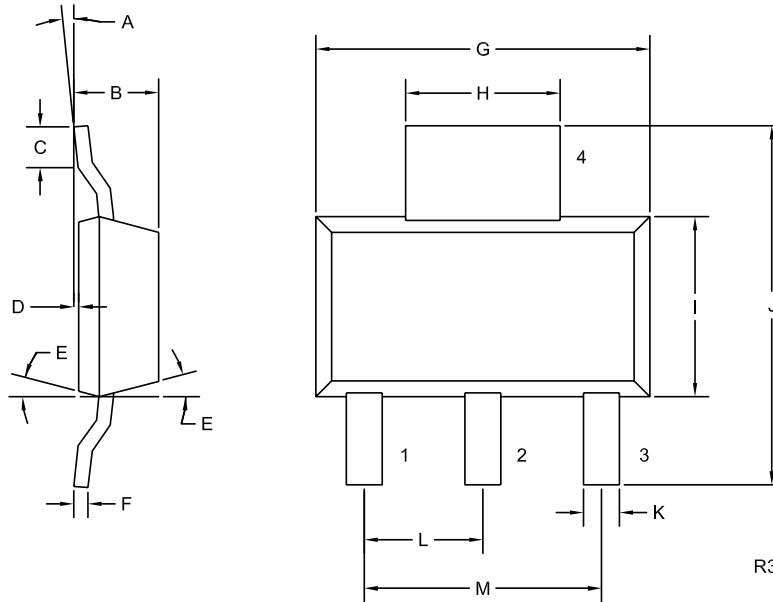

LEAD CODE:

- 1) BASE
- 2) COLLECTOR
- 3) EMITTER
- 4) COLLECTOR

MARKING CODE:

FULL PART NUMBER

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0°	10°	0°	10°
B	0.059	0.071	1.50	1.80
C	0.018	---	0.45	---
D	0.000	0.004	0.00	0.10
E	15°		15°	
F	0.009	0.014	0.23	0.35
G	0.248	0.264	6.30	6.70
H	0.114	0.122	2.90	3.10
I	0.130	0.146	3.30	3.70
J	0.264	0.287	6.70	7.30
K	0.024	0.033	0.60	0.85
L	0.091		2.30	
M	0.181		4.60	

SOT-223 (REV: R3)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.