

# Band-switching diode

## FEATURES



- Small plastic SMD package
- Low diode capacitance
- Low diode forward resistance
- Small inductance.

## APPLICATIONS

- Low loss band-switching in VHF television tuners
- Surface mount band-switching circuits.

## DESCRIPTION

Planar, high performance band-switch diode in a small SMD plastic package (SOD523).

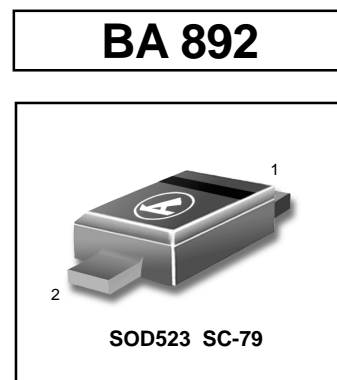

**LIMITING VALUES** In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_R$	continuous reverse voltage		–	35	V
$I_F$	continuous forward current		–	100	mA
$P_{tot}$	total power dissipation	$T_s=90^\circ\text{C}$	–	715	mW
$T_{stg}$	storage temperature		-65	+150	$^\circ\text{C}$
$T_j$	junction temperature		-65	+150	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS**  $T_j = 25^\circ\text{C}$  unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX.	UNIT
$V_F$	forward voltage	$I_F=10\text{ mA}$	–	–	1	V
$I_R$	reverse current	$V_R=30\text{ V}$	–	–	20	nA
$C_d$	diode capacitance	$f = 1\text{ MHz}$ ; note 1;				
		$V_R = 1\text{ V}$	–	0.92	1.4	pF
		$V_R = 3\text{ V}$	0.6	0.85	1.1	pF
$r_D$	diode forward resistance	$f = 100\text{ MHz}$ ; note 1;				
		$I_F = 3\text{ mA}$	–	0.45	0.7	$\Omega$
		$I_F = 10\text{ mA}$	–	0.36	0.5	$\Omega$
$L_s$	series inductance		–	0.6	–	nH

### Note

1. Guaranteed on AQL basis; inspection level S4, AQL 1.0.

## THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
$R_{th\ j-s}$	thermal resistance from junction to soldering-point	85	K/W

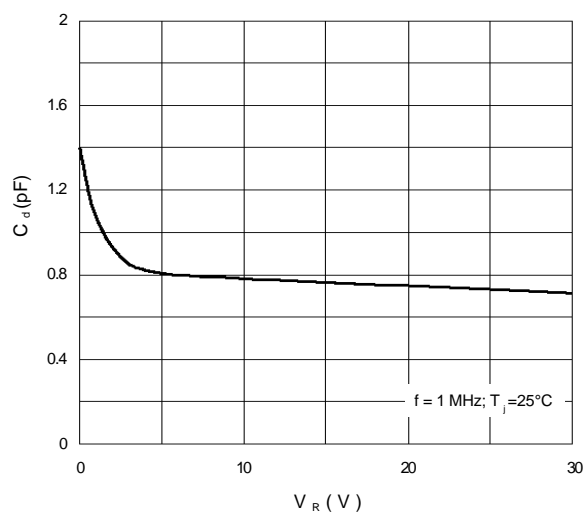
**BA 892**


Fig.1 Diode capacitance as a function of reverse voltage; typical values.

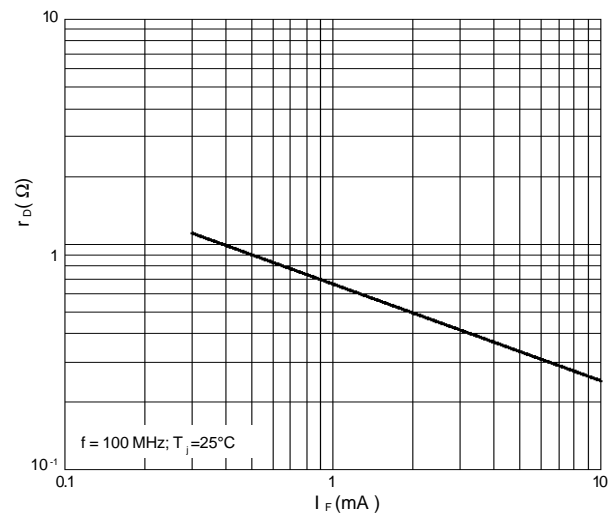


Fig.2 Diode forward resistance as a function of forward current; typical values.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.